



## PT4A SERIES POST TOP

Client:  
Project:  
Type:  
Quantity:

### CONSTRUCTION

Low copper aluminum alloy die-cast body. Architectural appearance, low EPA wind load design. IK09 rated enclosure protects electrical equipment against external mechanical impacts. All external fasteners are stainless steel.  
EPA: 0.34 sq/ft

### OPTICS

Dark-Sky compliant distribution.  
Light engines are available in 3000K ~ 5000K (80 CRI) selectable.  
Distribution pattern field selectable between Type III, IV and V.  
Molded silicone gasket throughout insures the sealing between the two compartments and provides ingress protection.  
Polycarbonate lens offers exceptional light distribution and durability.  
Optional Comfort lens for maximum glare reduction and visual comfort.

### ELECTRICAL

80+ CRI LED.  
CCT / Output / Distribution pattern field selectable - reference Ordering Information.  
-40°C up to 45°C\* (-40°F up to 113°F) maximum operating temperature.  
L<sub>70</sub> @ 25C > 100,000hrs  
50/60Hz, <20% THD, 0.9 power factor.  
Built-in photocell w/cap.  
Built-in 12V AUX socket for SENSOR-ANT / BLE Plug-N-Play sensor.  
Driver operates at 120-277V input, 0-10V dimmable driver, down to 10%.  
Optional 347/480V input.

### SENSORS (OPTIONAL)

SENSOR-ANT-6-4T Plug-N-Play PIR on/off/dimming/photosensing.  
SENSOR-BLE-6-4T Plug-N-Play PIR ALS Control Bluetooth/on/off/dimming/photosensing.  
CONTROL-LVFA AVI-ON Bluetooth Mesh Controller.

### MOUNTING

Suitable for 3" tenon, 2-3/8" tenon adapter included.  
Optional for 4" and 5" tenon adapter

### STANDARD FINISH

Corrosion resistant Dark Bronze powder coating finish.

### CUSTOM FINISH

Corrosion resistant Black, Graphite Metallic, Gray, Silver, White, Custom RAL#.

### CERTIFICATION

IP66 Wet location label standard.  
Meets Buy America Act requirements.  
IDA compliant: with 3000K color temperature selection.  
All luminaires are built to UL1598 standards and bear appropriate cULus labels.

### WARRANTY

5 year warranty, see Limited Warranty for additional information.



Standard Low Glare Optics

### SHIPPING DATA

Product	Measurement	Weight
PT4A-130	21"L x 19"W x 8"H	18 lb



**PT4A SERIES POST TOP**

**ORDER INFORMATION** **EXAMPLE: PT4A 130 SC FA SF3 DB UNVD**

Fixture	Series	Power & LM	CCT	Distribution	Mounting	Finish	Input
	<b>PT4A</b>			<b>5M</b>	<b>SF3</b>		

**A SERIES**

**PT4A** Architectural Post Top Area Light

**B POWER & LM**

Code	Power	LM
<b>130</b>	Field Selectable 52 / 78 / 104 / 130W	Field Selectable 8,500 ~ 19,500lm

**C CCT**

**SC** Field Selectable 3000K ~ 5000K

**D DISTRIBUTION / LENS**

**FA\*** Optics Lens - Field Selectable Distribution Type III, IV, V (standard)  
**CL\*** Comfort Lens

\*see Pg 5 for detail

**E MOUNTING**

**SF3\*\*** 3" Tenon Adapter - Standard (2-3/8" tenon fitting included)

\*\*see Pg 4 for detail

**F FINISH**

Standard

**DB** Dark Bronze

Custom Color

<b>CC</b>	<b>BK</b> Black	<b>GM</b> Graphite Metallic	<b>GR</b> Gray
	<b>SV</b> Silver	<b>WH</b> White	<b>RAL#</b>

**G INPUT**

**UNVD** 120-277V, 0-10V Dimmable w/12V AUX Output

**HVLD** 347-480V, 1-10V Dimming w/12V AUX Output

**ORDER INFORMATION (CONTINUED)**

Accessories  
Options

**H ACCESSORIES/OPTIONS**


<b>BAA</b>	Assembled in America, compliant with BAA (COTS)
<b>FAD</b>	Customized Output (Consult Factory)
<b>SENSOR-ANT-6-4T*</b>	Plug-N-Play Motion Sensor On/off/dimming/photosensing
<b>REMOTE-RC100</b>	Handheld Remote Commissioning Tool for SENSOR-ANT-6-4T
<b>SENSOR-BLE-6-4T*</b>	Plug-N-Play Motion Sensor Bluetooth/on/off/dimming/photosensing (ALS Control Mobile App)
<b>MOUNT-4SQR-SP-D</b>	4" Tenon Adapter for Round Pole
<b>MOUNT-5SQR-SP-D</b>	5" Tenon Adapter for Round Pole
<b>MOUNT-4SQ-SP-D</b>	4" Tenon Adapter for Square Pole
<b>MOUNT-5SQ-SP-D</b>	5" Tenon Adapter for Square Pole
<b>CONTROL-LVFA*</b>	AVI-ON Bluetooth Mesh Control System
<b>SURGE-LSP4-__</b>	10kV inline Surge Protection for Universal input: <b>U:</b> 120-277V, High voltage input: <b>H:</b> 347-480V

\*see page 5 for sensor spec

**PT4A SERIES POST TOP**

**DIMENSIONS**

Model	H1	H2	H3	H4	H5	W1	W2
PT4A	24.9" (632mm)	1.8" (47mm)	12.9" (328mm)	12" (304mm)	1.9" (50mm)	ø 18" (457mm)	ø 3.5" (90mm) OD ø 3.17" (80mm) ID* ø 2.48" (63mm) ID** 3" to 2-3/8" tenon fitting * without fitting ** with fitting

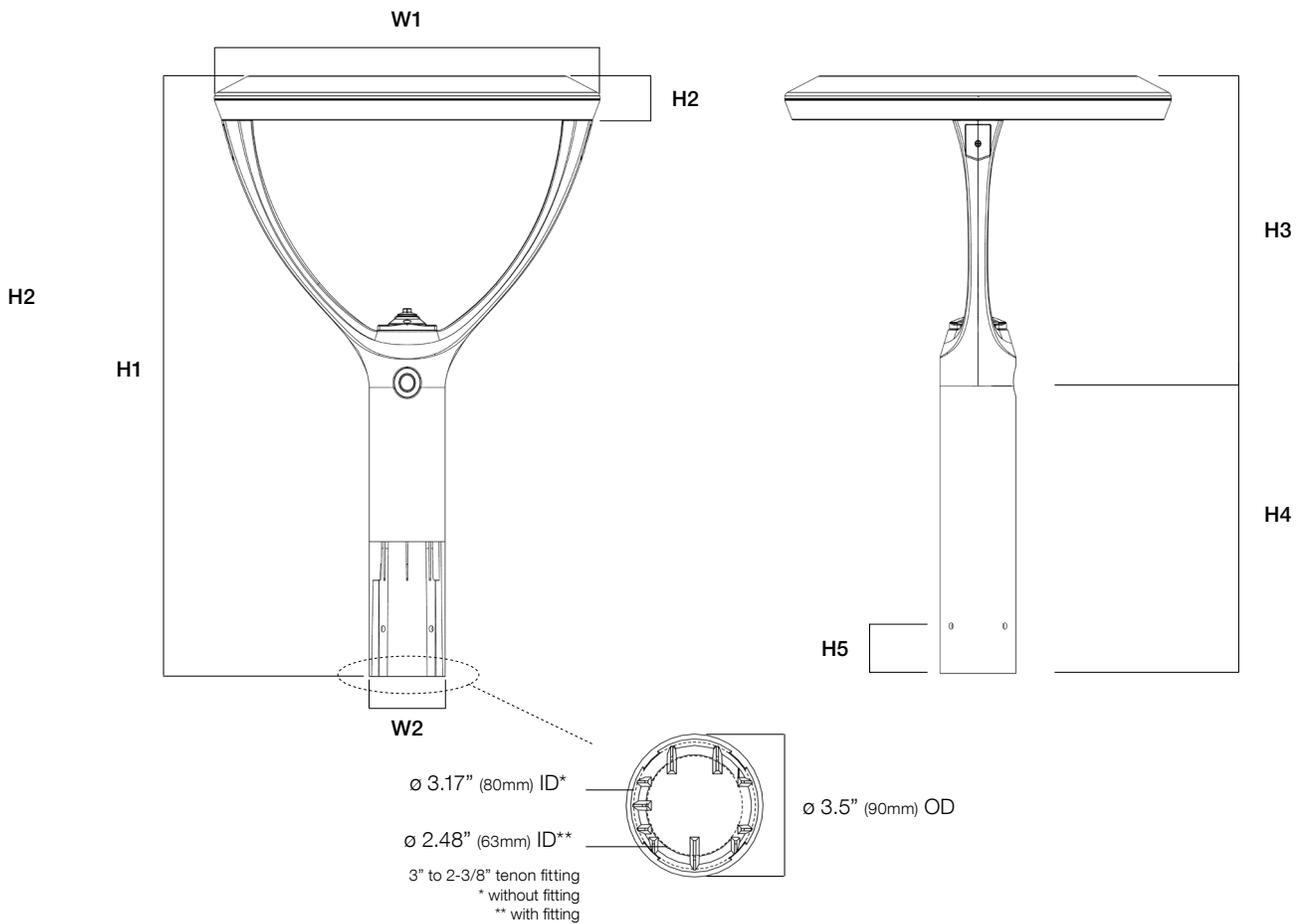

**PT4A SERIES POST TOP**


**DISTRIBUTION / LENS**



**FA Optics**

Field Selectable Distribution via Dipswitch


- Type III
- Type IV
- Type V



**CL Lens**

Ultra Low Glare  
 Type V Prismatic Diffused Lens  
 Maximum visual comfort and uniformity

**SELECTOR CONFIGURATION**

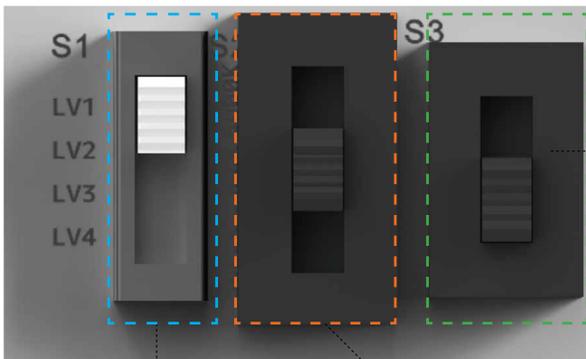

**Dipswitch 1  
 Output Selector**


- Lvl 1 - 100%
- Lvl 2 - 80%
- Lvl 3 - 60%
- Lvl 4 - 40%

**Dipswitch 2  
 CCT Selector**

- Lvl 1 - 3000K
- Lvl 2 - 4000K
- Lvl 3 - 5000K

**Dipswitch 3  
 Distribution Selector**

- Lvl 1 - Type III
- Lvl 2 - Type IV
- Lvl 3 - Type V

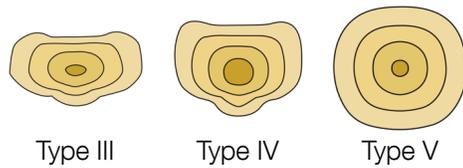

**PT4A SERIES POST TOP**

**PERFORMANCE DATA**

SYSTEM WATTS	DISTRIBUTION TYPE	3000K		4000K		5000K	
		LUMENS	LPW	LUMENS	LPW	LUMENS	LPW
52W	IV	8700	167	9500	183	9100	175
78W	IV	12500	160	13500	173	13000	167
104W	IV	15500	149	16500	159	16000	154
130W	IV	18500	142	20000	154	19500	150

**DLC CODE**

Part Number	DLC Part Number	DLC Class
PT4A - 130 SC 5M -SF3 - XX UD 130W 3000K Selection	pending	Premium
PT4A - 130 SC 5M -SF3 - XX UD 130W 4000K Selection	pending	Premium
PT4A - 130 SC 5M -SF3 - XX UD 130W 5000K Selection	pending	Premium

**PT4A SERIES POST TOP**

**SENSOR SPEC**

Model	Type	Mounting	Coverage	Input	Function	Programmable
SENSOR-ANT-6-4T (see page 8 for detail)	PIR	up to 40FT	30FT radius	12V DC	On/Off/Dimming	REMOTE-RC100
SENSOR-BLE-6-4T (see page 10 for detail)	PIR	up to 40FT	30FT radius	12V DC	Bluetooth Mesh On/Off/Dimming Daylight Harvesting	ALS Control Bluetooth Mobile App
CONTROL-LVFA (see page 11 for detail)	Fixture Controller	-	-	12V DC	Bluetooth Mesh On/Off/Dimming Scheduling	AVI-ON Bluetooth Mobile App



SENSOR-ANT-6-4T  
 SENSOR-BLE-6-4T



CONTROL-LVFA

**FEATURE**


- **Installation:** Plug-N-Play via AUX Socket on Attached Fixture
- **Commissioning:** through Remote Control
- **Control:** Hold time, High-Low setting, Continuous Bi-Level Dimming, Code-Compliant Manual-On or Auto-Off Capability
- **Sensor:** Motion (Occupancy/Vacancy/Manual) and Daylight



**SPECIFICATIONS**



<b>SENSOR TYPE:</b>	Passive Infrared Sensor (PIR)
<b>STANDARD OPTION:</b>	SENSOR-ANT-6-4T
<b>EMB OPTION:</b>	SENSOR-ANT-6-4T-EM (Designed for fixtures with emergency kit. When the voltage power is off, the sensor will stop working.)
<b>INPUT VOLTAGE:</b>	12-24VDC, >30mA
<b>LIGHT CONTROL:</b>	10 ~ 50LUX
<b>CONTROL OUTPUT:</b>	0-10V
<b>OPERATING TEMP:</b>	-4°F ~ +140°F (-20°C ~ +60°C)
<b>COMMISSIONING RANGE:</b>	50FT from Remote Control
<b>TIME SETTING:</b>	10sec ~ 60min (adjustable)
<b>DETECTION ANGLE:</b>	360°
<b>MOUNTING HEIGHT:</b>	Up to 50FT.
<b>WARRANTY:</b>	5 years
<b>IP RATING:</b>	IP65

**DIMENSIONS**

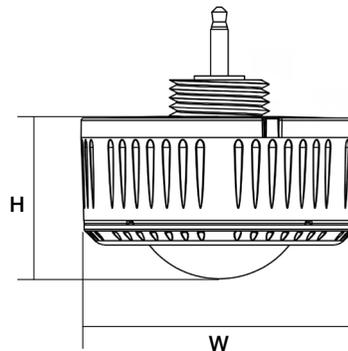

H	W
1.03" (26.2mm)	2.17" (55mm)

**COVERAGE PATTERNS**

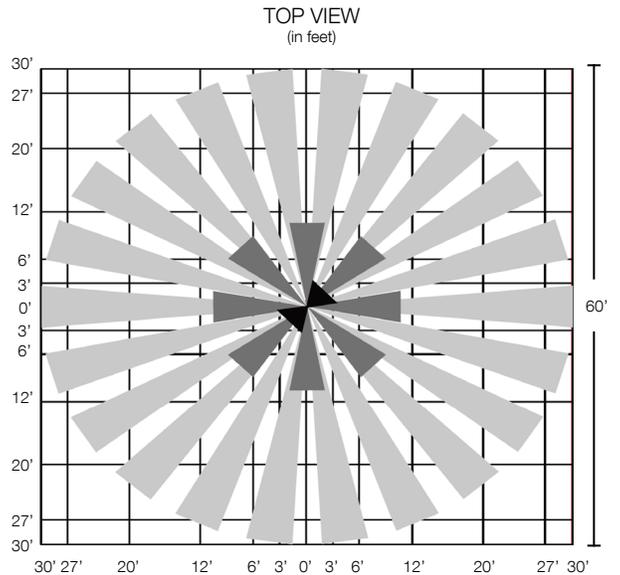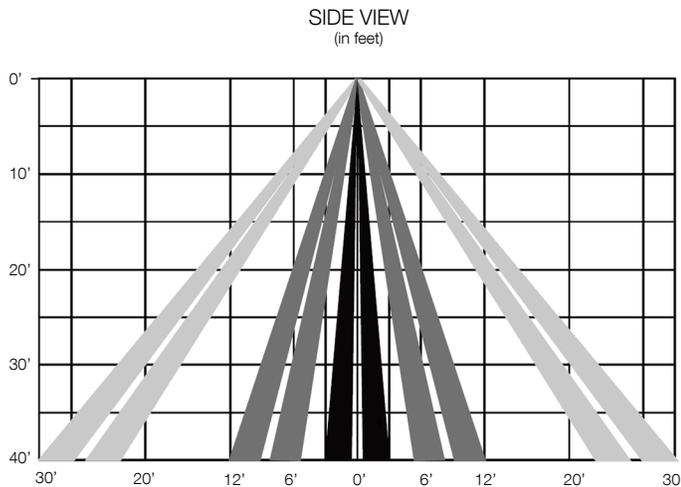

**ORDER CODES**

<b>SENSOR-ANT-6-4T</b>	Plug-N-Play PIR on/off/dimming/photosensing up to 40FT MH
<b>SENSOR-ANT-6-4T-EM</b>	Plug-N-Play PIR on/off/dimming/photosensing for EMB application up to 40FT MH
<b>SENSOR-ANT-6-4T-H</b>	Plug-N-Play PIR on/off/dimming/photosensing up to 50FT MH
<b>SENSOR-ANT-6-4T-H-EM</b>	Plug-N-Play PIR on/off/dimming/photosensing for EMB application up to 50FT MH



**FEATURE**

The Remote control wireless IR configuration tool is a handheld tool for remote configuration of IR-enabled fixture integrated sensors. The tool enables device to modify via push button and stores up to four sensor parameter modes to speed configuration of multiple sensors.

	PROGRAMMABLE	RESET
<b>COMPATIBLE SENSORS</b>	SENSOR-ANT-6-4T SENSOR-ANT-6-4T-EM SENSOR-ANT-6-4T-H SENSOR-ANT-6-4T-H-EM SENSOR-ANT-7 SENSOR-ANT-3C-B1 SENSOR-819-D1/D2 SENSOR-823 SENSOR-820	SENSOR-BLE-6-4T SENSOR-BLE-7 SENSOR-BLE-7D SENSOR-BLE-819 SENSOR-BLE-619 CONTROL-BLE-5-4T WALLSWITCH-BLE-101 WALLSWITCH-BLE-204



**Dimension**

L - 4.84" (123mm)  
W - 2.76" (70mm)  
H - .80" (20.3mm) Thickness

**SPECIFICATION**

**Carrying Case**

RC-100 in Carrying Case

**Commissioning Range**

Up to 50FT (15mm)

**Operating Temp**

32F ~ 122F (0°C ~ 50°C)

**Power**

2 x AAA 1.5V Alkaline batteries

**BRIGHTNESS**

Set output level (in 70%, 80%, 90%, or 100%) of connected lighting during occupancy.

**SENSITIVITY**

Set the sensitivity (in 20%, 50%, 75%, or 100%) of the occupancy sensor.

**HOLD TIME**

Set the time (in 10s, 1m, 5m, 10m, 16m, 20m, 30m, or 60m) that the fixture will hold at normal output after the space is vacant.

**DAYLIGHT SENSOR**

Set the threshold of natural light (in 10, 30, or 50) as setpoint to light on automatically for the sensor. If natural light is above the selected threshold, fixture will shut off. Set daylight (in 100, 300, 500) as setpoint to light off.

**STAND-BY DIM/TIME**

**DIM:** Set the output level (in 0%, 10%, 30%, or 50%) of the fixture during vacancy. This will only take place after Hold Time has elapsed.


**TIME:** Set the time (+∞, 1m, 30m, or 50m) that the sensor will remain in stand-by mode before powering down.

**ON/OFF**

Use this to manually power a fixture on or off.

**AUTO**

Press Auto to engage/unlock a sensor. Press Auto, then press Display to show the sensors current setting parameters.

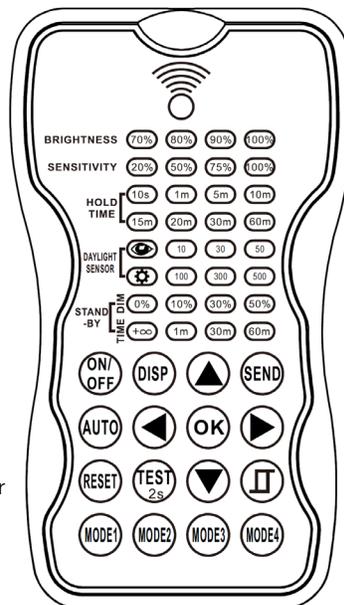

**DISPLAY**

Press to Display to view current setting parameters for each function. LED indicators will highlight current settings.

**DIRECTIONAL ARROWS**

Use the arrows to navigate the setting options by pressing up/down or left/right.

**SEND**

Press Send to upload displayed settings to individual sensor/fixture. The fixture will blink on and off to confirm new settings.

**SMART DAYLIGHT SENSOR**

Open and or close smart daylight sensor. Press up/down arrows buttons to enter setting condition, the parameters LEDs of remote control will flash to be selected.

**TEST**

Used to test sensitivity of occupancy sensing. Press Test, then the fixture will enter Test Mode, where Hold Time is only 2s. While Test Mode is active, Stand-By and Daylight sensing will be disabled. Press Auto to exit Test Mode.

**RESET**

Press Reset to put all parameters back to default settings.

**MODE**

Press the Mode # that you want to save. Use Directional Arrows to select new parameters. Press OK to confirm.

**FEATURE**


- **Installation:** Plug-N-Play via AUX socket on attached fixture
- **Commissioning:** Wirelessly through ALS Control Mobile App (iOS / Android)
- **Certification:** DLC 5.1 Networked Lighting Control System
- **Control:** Hold time, High-Low setting, continuous Bi-level dimming, Code-compliant manual-on or auto-off capability
- **Sensor:** Motion (Occupancy/Vacancy/Manual) and Daylight Harvesting
- **Room and Zone Control:** Zoning and Grouping control, Scheduling



**SPECIFICATIONS**



<b>SENSOR TYPE:</b>	Passive Infrared Sensor (PIR)
<b>WIRELESS STANDARDS:</b>	5.0 Bluetooth Mesh
<b>INPUT VOLTAGE:</b>	12-24VDC, >50mA
<b>CONTROL OUTPUT:</b>	0-10V
<b>OPERATING TEMP:</b>	-4°F ~ +140°F (-20°C ~ +60°C)
<b>COMMISSIONING RANGE:</b>	50FT
<b>BLUETOOTH RANGE:</b>	164FT
<b>DETECTION ANGLE:</b>	360°
<b>MOUNTING HEIGHT:</b>	Up to 40FT
<b>WARRANTY:</b>	5 years
<b>IP RATING:</b>	IP65

**DIMENSIONS**

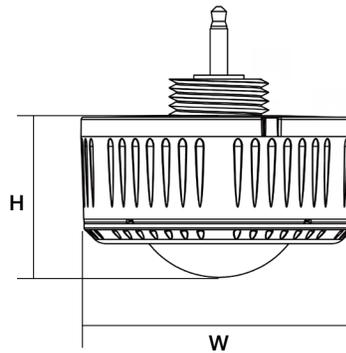

H	W
1.03" (26.2mm)	2.17" (55mm)

**COVERAGE PATTERNS**

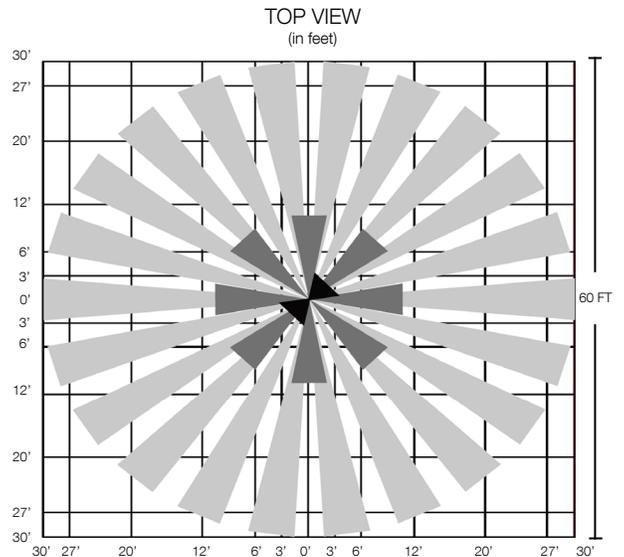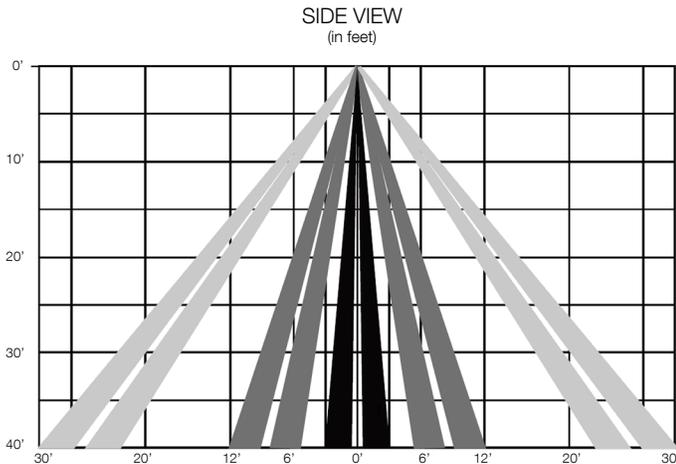

**PT4A SERIES POST TOP**

**CONTROL-LVFA SPEC**

**Status LEDs & Config Button**

Quick and easy validation of wiring and network

**Direct Connect™ Sensor Port**

Simple and cost-effective addition to Avi-on sensors

**Terminal Blocks & Mounting Tabs**

Faster, easier and lower cost installation eliminating connectors



**Internal Antenna**

Improved performance and eliminates risk of accidentally cutting a hanging wire


**SPECIFICATIONS**

**INPUT VOLTAGE:** 12-24VDC  
**CURRENT:** 15mA without a Sensor  
 19mA with a DC PIR Sensor  
 48mA with a DC Microwave Sensor  
**0-10V DIMMING:** 12-24VDC  
**SIZE:** 2.30in x 1.43in x 0.75in  
 (58.2mm x 36.4mm x 19mm)  
**MOUNTING:** Removable mounting tabs  
**WEIGHT:** 0.45 oz (16g)  
**OPERATING TEMP:** -22°F to +158°F (-30°C to + 70°C)


**RADIO FREQUENCY:** 2.4GHz  
**WIRELESS STANDARD:** BLE 4.2 with Mesh  
**POINT TO POINT RANGE\*:** 80ft with obstructions  
 350ft unobstructed  
**SECURITY:** AES 128-bit encryption for device to device communication  
 AES 256-bit encryption for device to cloud communication  
**WARRANTY:** 5 years; 10 years optional  
**REGULATORY:** FCC: 2AFZI-AVI1010 B  
 IC: 20544-AVI1010 B  
 BQB: D031801, DID: 86303  
 UL 916, 2043 (Plenum Rated)

\*When communicating through the mesh, range is essentially unlimited (5000ft+)

**WIRING DIAGRAM**

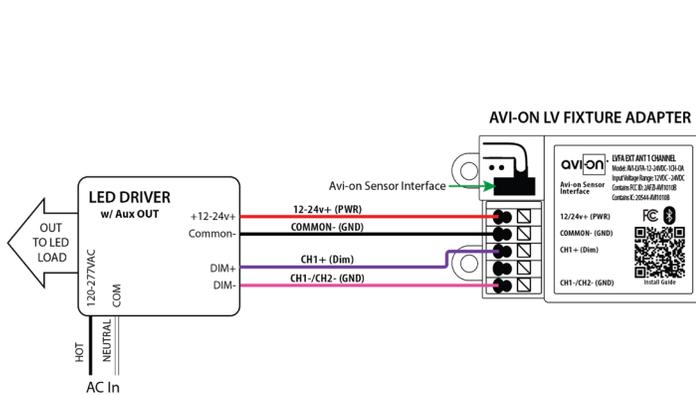

Fixture adapter powered by LED driver auxiliary output

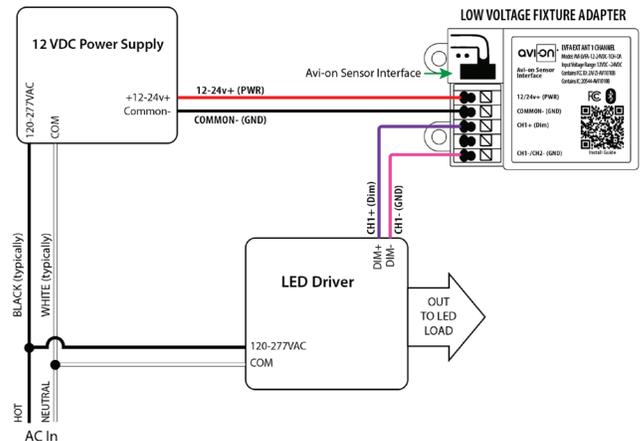

Fixture adapter connected to LED driver and using power supply