

## CONTRACTOR SERIES LINEAR STRIP

Client:  
Project:  
Type:  
Quantity:

### CONSTRUCTION

Slim compact design channel formed from cold-rolled 22-gauge steel with matte White finish. 1/2" knockout made on end cap for sensor or surface conduit mount.

### OPTICS

End-to-end U-shaped frosted polycarbonate (PC) lens standard.

### ELECTRICAL

Delivered 130lm/W efficacy LEDs offer 80+ color rendering index (CRI), L70 >100,000 hours expected life.

-40°C up to 50°C (-40°F up to 122°F) maximum operating temperature.

Selectable lumen and CCT technology allows easy field-adjustable capability.

Luminaire ships with maximum output and 4000K CCT setting.

Driver operates at 120-277V input, 0-10V dimmable driver, dimmable down to 10%.

Optional 10kV surge protector.

### MOUNTING

Designed for direct wiring, surface mountable underneath electrical box.

5" OD beauty ring included.

### SENSORS (OPTIONAL)

SENSOR-819-O1 End mount on/off motion sensor with lowbay lens.

SENSOR-819-D1 End mount on/off/dimming and photocell sensor with lowbay lens.

SENSOR-BLE-819 End mount ALS CONTROL bluetooth on/off motion sensor lowbay lens.

### STANDARD FINISH

Semi-gloss White finish, suitable for damp location.

### CERTIFICATION

Damp location label standard.

All luminaires are built to UL1598 standards and bear appropriate cULus labels.

For Emergency application, equipment with UL924 certified battery packs.

DLC® Standard (DesignLights Consortium Qualified).

### WARRANTY

5 year warranty, see Limited Warranty for additional information.



## CONTRACTOR SERIES LINEAR STRIP

ORDER INFORMATION					EXAMPLE: CSL 4SMC WH UD
Fixture	Series	Size	Finish	Input	
	CSL		WH	UD	
Accessories Options					
A	SERIES				
	CSL	Contractor Series - Linear Strip			
B	SIZE				
	Code	Size	Power	CCT	
	4SMC	4-Foot	34W / 38W / 45W	3500K / 4000K / 5000K	
	8SMC	8-Foot	65W / 75W / 90W	3500K / 4000K / 5000K	
C	FINISH				
	WH	White			
D	INPUT				
	UD	120-277V, 0-10V Dimmable			
E	ACCESSORIES/OPTIONS				
	AIA	Assembled in America, compliant with BAA (COTS)			
	SURGE-LSP4-U	10kV Inline Surge Protection for Universal Input / <b>U</b> : 120-277V			
	MOUNT-HIGHBAY-CK	Aircraft Cable Hanger Kit (Pair)			
	SENSOR-819-O1	End mount on/off motion sensor with lowbay lens			
	SENSOR-819-D1*	End Mount On/Off/Dimming and Photocell Sensor With Lowbay Lens			
	REMOTE-RC100	Handheld Remote Commissioning Tool for SENSOR-819-D1/D2 Only			
	SENSOR-BLE-819-L1*	End Mount PIR Bluetooth Daylight Harvesting Sensor (ALS Control Mobile App) / <b>L1</b> : up to 20FT			
	EMB-8W-B*	High Voltage Output Smart Emergency Battery 8W 100-347VAC Input 170VDC Output			
	-CORD	18-3 300V 6 Foot Cord			
	-PLUG	18-3 300V 6 Foot and 3 Prong Plug			

\*see page 5 for sensor spec

\*\*see page 6 for emb spec

**CONTRACTOR SERIES LINEAR STRIP**

**DIMENSIONS**

Model	L	W	H
CSL-4SMC	48.00" (1219mm)	2.00" (48mm)	2.50" (64mm)
CSL-8SMC	95.00" (2438mm)	2.00" (48mm)	2.50" (64mm)



## CONTRACTOR SERIES LINEAR STRIP

### PERFORMANCE DATA

SYSTEM WATTS	SIZE	VOLTAGE	3500K		4000K		5000K	
			LUMEN	LPW	LUMEN	LPW	LUMEN	LPW
34W	4-Foot	120-277V	4,420	130	4,454	131	4,488	132
38W	4-Foot	120-277V	4,940	130	4,978	131	5,016	132
45W	4-Foot	120-277V	5,850	130	5,895	131	5,940	132
65W	8-Foot	120-277V	8,450	130	8,515	131	8,580	132
75W	8-Foot	120-277V	9,750	130	9,825	131	9,900	132
90W	8-Foot	120-277V	11,700	130	11,790	131	11,880	132

### DLC CODE

Part Number	DLC Product ID	DLC Class
CSL-4SMC-WHUD	S-VVJYS4	Standard
CSL-8SMC-WHUD	Linear: S-M9BM7Z / HighBay: S-7S7LBB	Standard

**CONTRACTOR SERIES LINEAR STRIP**

SENSOR SPEC						
Model	Type	Mounting	Coverage	Input	Function	Programmable
SENSOR-819-O1	PIR	20FT	30FT radius	Universal	On/Off	-
SENSOR-819-D1	PIR	20FT	30FT radius	Universal	On/Off/Dimming	REMOTE-RC100
SENSOR-BLE-819 (see page 7 for detail)	PIR	L1 - 20FT	30FT radius	Universal	Bluetooth Mesh On/Off/Dimming Daylight Harvesting	ALS Control Bluetooth Mobile App




SENSOR-819-XX  
 SENSOR-BLE-819

## CONTRACTOR SERIES LINEAR STRIP

### EMB SPEC

Model	Battery Capacity	Input	Output	Output Power	Operating Temp	Installation
EMB-8W-B	90mins	100-347VAC	170VDC	8W	0°C ~ 50°C 32°F ~ 122°F	Factory or Field Install

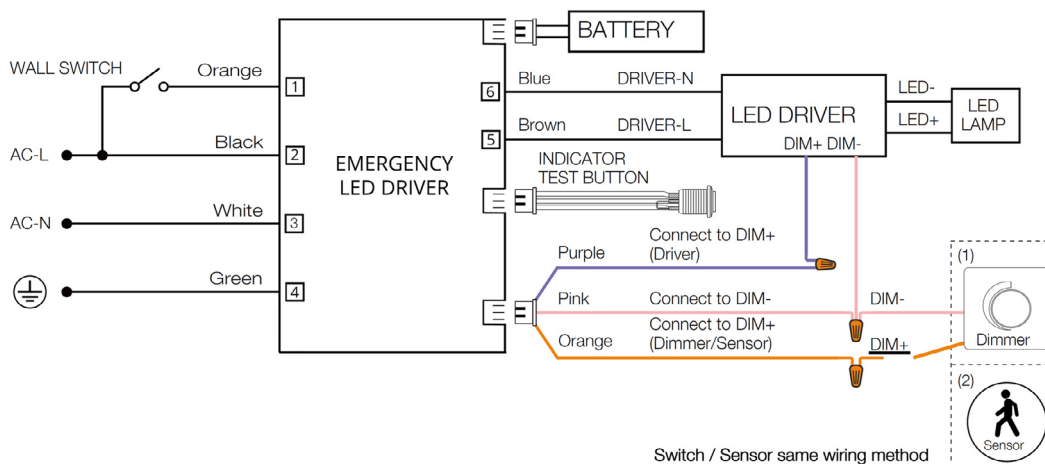



## SENSOR-BLE-819 BLUETOOTH PIR SENSOR

Client:  
Project:  
Type:  
Quantity:

### FEATURE

- **Installation:** Factory or Field Install End Mount to Fixture
- **Commissioning:** Wirelessly through ALS Control Mobile App (iOS / Android)
- **Certification:** DLC 5.1 Networked Lighting Control System
- **Control:** Hold time, High-Low setting, continuous Bi-level dimming, Code-compliant manual-on or auto-off capability
- **Sensor:** Motion (Occupancy/Vacancy/Manual) and Daylight Harvesting
- **Room and Zone Control:** Zoning and Grouping control, Scheduling




### SPECIFICATIONS

**SENSOR TYPE:** Passive Infrared Sensor (PIR)  
**WIRELESS STANDARDS:** Bluetooth SIG Mesh  
**INPUT VOLTAGE:** 120/277VAC  
**CONTROL OUTPUT:** 0-10V  
**OPERATING TEMP:** -40°F ~ +167°F (-40°C ~ +75°C)




**COMMISSIONING RANGE:** 50FT  
**BLUETOOTH RANGE:** Integral antenna up to 100FT  
**DETECTION ANGLE:** Vertical 90° x Horizontal 360°  
**MOUNTING HEIGHT:** 8 - 40FT  
**WARRANTY:** 5 years  
**IP RATING:** IP20 Damp

### DIMENSIONS

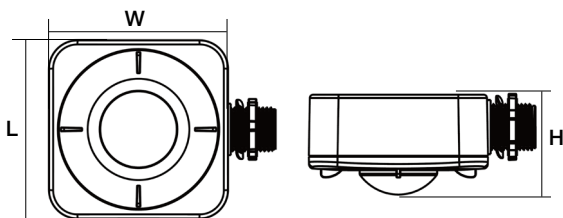

L	W	H
3.19" (81mm)	4.02" (102mm)	1.70" (43.3mm)

### COVERAGE PATTERNS

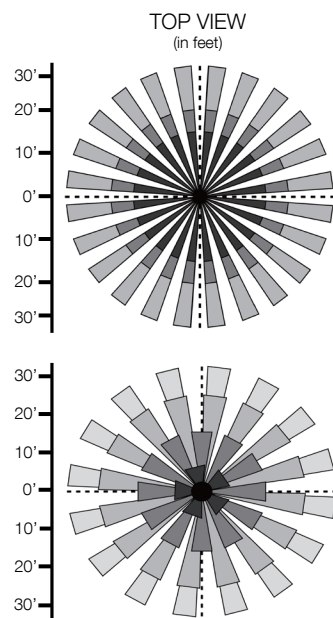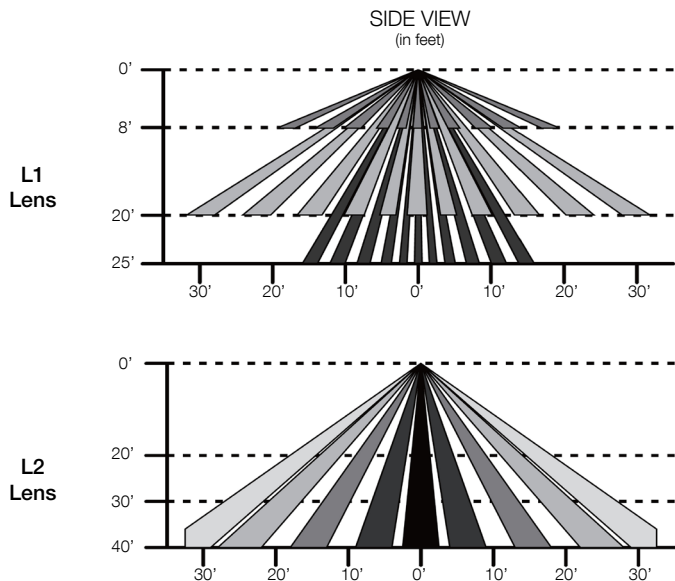

## FEATURE

- **Installation:** Factory or Field Install, End Mount to Fixture
- **Commissioning:** Manually Adjusted through Dip Switch
- **Control:** Hold time, Manual/Auto - On/Off
- **Sensor:** Photocell and Motion (Occupancy/Vacancy/Manual)




## SPECIFICATIONS

**SENSOR TYPE:** Passive Infrared Sensor (PIR)  
**INPUT VOLTAGE:** 120/277VAC  
**LIGHT-CONTROL:** 10 ~ 300LUX  
**OPERATING TEMP:** -40°F ~ +167°F (-40°C ~ +75°C)  
 Damp Location Listed



**TIME SETTING:** 10sec ~ 30min (adjustable)  
**DETECTION ANGLE:** 360°  
**MOUNTING HEIGHT:** 8 - 40FT  
**WARRANTY:** 5 years

## DIMENSIONS

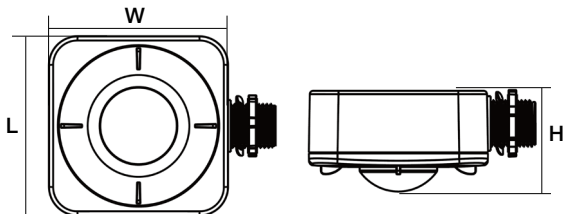


L	W	H
3.19" (81mm)	4.02" (102mm)	1.70" (43.3mm)

## COVERAGE PATTERNS

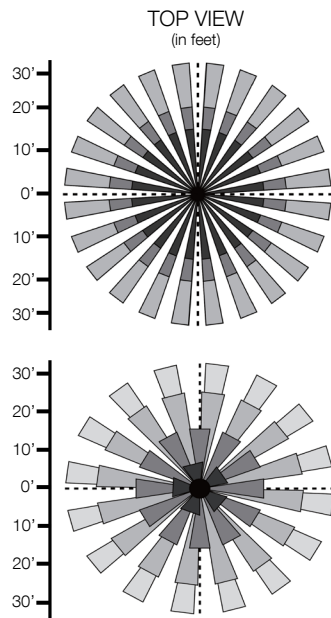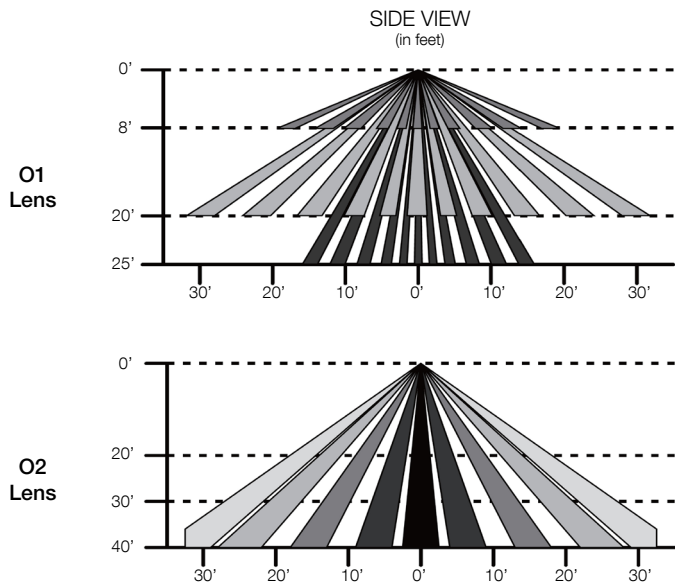




### PROGRAMMING SETTINGS




SENSITIVITY			
1	2	3	
↓	↓	↓	20%
↓	↑	↑	50%
↑	↓	↑	75%
↑	↑	↑	100%




### DETECTION RANGE

The radius of the more or less circular detection zone produced on the ground after mounting the sensor at a height of 40FT.  
Pull switch to ON position "up arrow", pull switch to OFF position "down arrow" to switch location and detection range.



TIME				
4	5	6	7	
↓	↓	↓	↓	10S
↓	↓	↓	↑	1Min
↓	↑	↓	↓	5Min
↓	↑	↓	↑	10Min
↑	↓	↓	↑	30Min



LIGHT			
8	9	10	
↓	↓	↓	☀ (light sensor disable)
↓	↓	↑	10Lux
↓	↑	↑	50Lux
↑	↑	↓	300Lux

### HOLD TIME

Light can be set to stay ON for any period of time between 10s to 30min.  
Any movement detected before this time elapse will reset.  
Pull switch to ON position "up arrow", pull switch to OFF position "down arrow" to switch location and hold time.

### LIGHT-CONTROL

Chosen light response threshold can be infinitely from 10 ~ 300LUX.  
Pull switch to ON position "up arrow", pull switch to OFF position "down arrow" to switch location and light-control.

### ORDER CODE

### EXAMPLE: SENSOR-819-O2

#### A SERIES

**SENSOR-819-O** End Mount PIR Occupancy Sensor 120-277V Input On/Off

#### B LENS

Code	Mounting	Coverage
1	20FT	30FT Radius
2	40FT	30FT Radius

### FEATURE

- **Installation:** Factory or Field Install, End Mount to Fixture
- **Commissioning:** Manually Adjusted through Dip Switch or through Remote Control
- **Control:** Hold time, High-Low setting, Continuous Bi-Level Dimming, Code-Compliant Manual-On or Auto-Off Capability
- **Sensor:** Photocell and Motion (Occupancy/Vacancy/Manual)




### SPECIFICATIONS

<b>SENSOR TYPE:</b>	Passive Infrared Sensor (PIR)
<b>INPUT VOLTAGE:</b>	120/277VAC
<b>LIGHT-CONTROL:</b>	10 ~ 50LUX
<b>CONTROL OUTPUT:</b>	0-10V Dimming
<b>OPERATING TEMP:</b>	-40°F ~ +167°F (-40°C ~ +75°C) Damp Location Listed



<b>COMMISSIONING RANGE:</b>	50FT from Remote Control
<b>TIME SETTING:</b>	10sec ~ 15min (adjustable)
<b>DETECTION ANGLE:</b>	360°
<b>MOUNTING HEIGHT:</b>	8 - 40FT
<b>WARRANTY:</b>	5 years

### DIMENSIONS

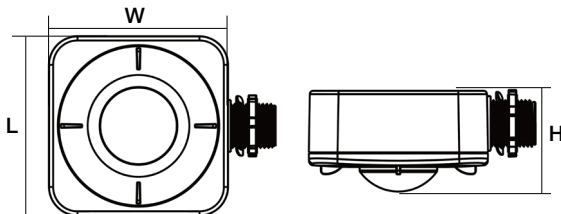


L	W	H
3.19" (81mm)	4.02" (102mm)	1.70" (43.3mm)

### COVERAGE PATTERNS

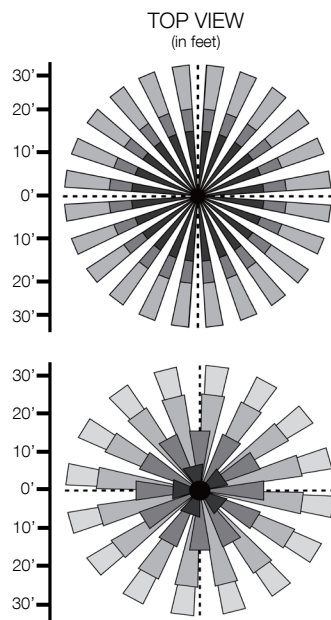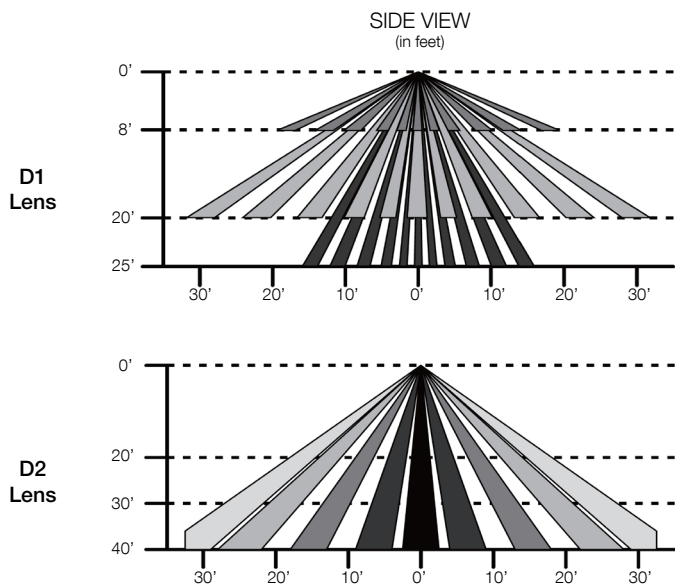

### PROGRAMMING SETTINGS





**SENSITIVITY**  
1 2  
↓ ↓ 20%  
↓ ↑ 50%  
↑ ↓ 75%  
↑ ↑ 100%




### DETECTION RANGE

Detection range can be adjusted by selecting the combination on the Dip Switch to fit coverage for each application



**TIME**  
3 4  
↓ ↓ 10S  
↓ ↑ 1Min  
↑ ↓ 5Min  
↑ ↑ 15Min




**STAND-BY LEVEL**  
7 8  
↓ ↓ 0%  
↓ ↑ 10%  
↑ ↓ 30%  
↑ ↑ 50%

### HOLD TIME


Light can be set to stay ON for any period of time between 10s~15min. Any movement detected before this time elapse will reset.

### STAND-BY LIGHT LEVEL

The low light level selection available for the stand-by period.



**LIGHT**  
5 6  
↓ ↓ ☀ (light sensor disable)  
↓ ↑ 10Lux  
↑ ↓ 30Lux  
↑ ↑ 50Lux



**STAND-BY TIME**  
9 10  
↓ ↓ +∞  
↓ ↑ 1Min  
↑ ↓ 30Min  
↑ ↑ 60Min

### LIGHT-CONTROL

Chosen light response threshold can be infinitely from 10 ~ 50LUX.

### STAND-BY-TIME

The time period the luminaire remains at a low light level before it completely switches off if no motion is detected.

### ORDER CODE

EXAMPLE: SENSOR-819-D2

#### A SERIES

**SENSOR-819-D** End Mount PIR Occupancy Sensor 120-277V Input 0-10V Dimming

#### B LENS

Code	Mounting	Coverage
1	20FT	30FT Radius
2	40FT	30FT Radius

#### C OPTIONS

**REMOTE-RC100\*** Sensor Remote Control Programmer

\*see page 3 for detail

### FEATURE

The Remote control wireless IR configuration tool is a handheld tool for remote configuration of IR-enabled fixture integrated sensors. The tool enables device to modify via push button and stores up to four sensor parameter modes to speed configuration of multiple sensors.

	PROGRAMMABLE	RESET
<b>COMPATIBLE SENSORS</b>	SENSOR-ANT-6-4T SENSOR-ANT-6-4T-EM SENSOR-ANT-7 SENSOR-ANT-3C-B1 SENSOR-819-D1/D2 SENSOR-823 SENSOR-820	SENSOR-BLE-6-4T SENSOR-BLE-7 SENSOR-BLE-7D SENSOR-BLE-819 SENSOR-BLE-619 CONTROL-BLE-5-4T WALLSWITCH-BLE-101 WALLSWITCH-BLE-204

### SPECIFICATION

#### Carrying Case

RC-100 in Carrying Case

#### Commissioning Range

Up to 50FT (15mm)

#### Operating Temp

32F ~ 122F (0°C ~ 50°C)

#### Power

2 x AAA 1.5V Alkaline batteries



#### Dimension

L - 4.84" (123mm)  
W - 2.76" (70mm)  
H - .80" (20.3mm) Thickness

#### BRIGHTNESS

Set output level (in 70%, 80%, 90%, or 100%) of connected lighting during occupancy.

#### SENSITIVITY

Set the sensitivity (in 20%, 50%, 75%, or 100%) of the occupancy sensor.

#### HOLD TIME

Set the time (in 10s, 1m, 5m, 10m, 16m, 20m, 30m, or 60m) that the fixture will hold at normal output after the space is vacant.

#### DAYLIGHT SENSOR

Set the threshold of natural light (in 10, 30, or 50) as setpoint to light on automatically for the sensor. If natural light is above the selected threshold, fixture will shut off. Set daylight (in 100, 300, 500) as setpoint to light off.

#### STAND-BY DIM/TIME

**DIM:** Set the output level (in 0%, 10%, 30%, or 50%) of the fixture during vacancy. This will only take place after Hold Time has elapsed.


**TIME:** Set the time (+∞, 1m, 30m, or 50m) that the sensor will remain in stand-by mode before powering down.

#### ON/OFF

Use this to manually power a fixture on or off.

#### AUTO

Press Auto to engage/unlock a sensor.  
Press Auto, then press Display to show the sensors current setting parameters.

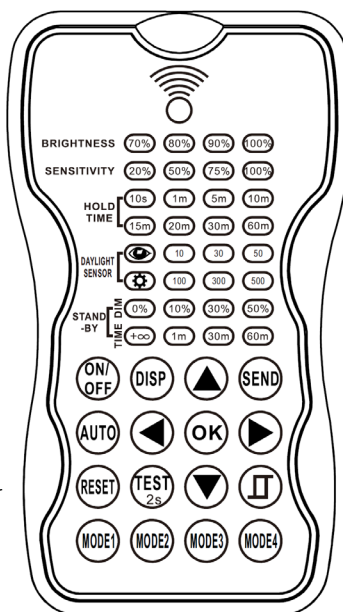

#### DISPLAY

Press to Display to view current setting parameters for each function. LED indicators will highlight current settings.

#### DIRECTIONAL ARROWS

Use the arrows to navigate the setting options by pressing up/down or left/right.

#### SEND

Press Send to upload displayed settings to individual sensor/fixture. The fixture will blink on and off to confirm new settings.

#### SMART DAYLIGHT SENSOR

Open and or close smart daylight sensor.  
Press up/down arrows buttons to enter setting condition, the parameters LEDs of remote control will flash to be selected.

#### TEST

Used to test sensitivity of occupancy sensing.  
Press Test, then the fixture will enter Test Mode, where Hold Time is only 2s.  
While Test Mode is active, Stand-By and Daylight sensing will be disabled.  
Press Auto to exit Test Mode.

#### RESET

Press Reset to put all parameters back to default settings.

#### MODE

Press the Mode # that you want to save.  
Use Directional Arrows to select new parameters.  
Press OK to confirm.