ALS®
Advantage Lighting Solutions

DL-G2 SERIES WET LOCATION DOWNLIGHT

Client:
Project:
Type:
Quantity:

CONSTRUCTION
Ultra low profile stamped aluminum body for 4” and 6” aperture application, entire fixture serves as heat sink for exceptional thermal management.

OPTICS
Drop down diffuse impact resistant polycarbonate lens offer glare-free uniform illumination.
Lens sealed with body to prevent dirty and splash of water from entry.

ELECTRICAL
90+ CRI high efficacy LED light engine secured on aluminum body.
120V, 50/60Hz input
Light engine selectable 2700K / 3000K / 3500K / 4000K / 5000K
Continuous dimming to 10% with standard incandescent dimmer and many LED rated dimmers.
Greater than 70% LED lumen maintenance at 50,000 hours.
Built-in motion sensor with programmable time delay for 1min / 5min / 8min.
Operating temperature: -4°F to +113°F (-20°C to +45°C).

MOUNTING
New Construction: Install onto standard Single Gang, 3” or 4” Round or Square J-Box.
Retrofit: Install onto standard Single Gang, 3” or 4” Round or Square J-Box, or use with 4”, 5” or 6” recessed cans with torsion spring clips included.

STANDARD FINISH
Corrosion resistant matte White powder coating finish.

CERTIFICATION
Meets Buy America Act requirements (COTS).
Wet location.
All luminaires are built to UL1598 standards and bear appropriate cETLus labels.
FCC Certified.
Energy Star Certified.
JA8 Compliant.
Title 24 compliant; see local ordinance for qualification information.

WARRANTY
5 year warranty, see Limited Warranty for additional information.





Optional Motion Sensor

DL-G2 SERIES WET LOCATION DOWNLIGHT

ORDER INFORMATION

EXAMPLE: DL-G2 15SC F WH S

Fixture	Series	Model	Lens	Finish	Input
	DL-G2		F	WH	

A SERIES

DL-G2	DL Gen 2 Wet location Downlight

B MODEL

CODE	TRIM	POWER	LM	CCT
10SC	4”	10W	800lm	2700K / 3000K / 3500K / 4000K / 5000K
15SC	6”	15W	1,240lm	2700K / 3000K / 3500K / 4000K / 5000K

C LENS

F	Frosted Lens

D FINISH

WH	Smooth White Finish

E INPUT

S	120V Input Triac Dimming
SM	120V Input Triac Dimming, w/ built-in programmable motion sensor (motion sensor spec on page 3)

F ACCESSORIES/OPTIONS

BAA	Assembled in America, compliant with BAA (COTS)

ALS®
Advantage Lighting Solutions

DL-G2 SERIES WET LOCATION DOWNLIGHT

DIMENSIONS

Model	D1	D2	H
DL-G2-10	ø5.87" (Ø99mm)	ø3.89" (Ø149mm)	0.87" (22mm)
DL-G2-15	ø7.2" (Ø183mm)	ø5.12" (Ø130mm)	0.9" (22mm)

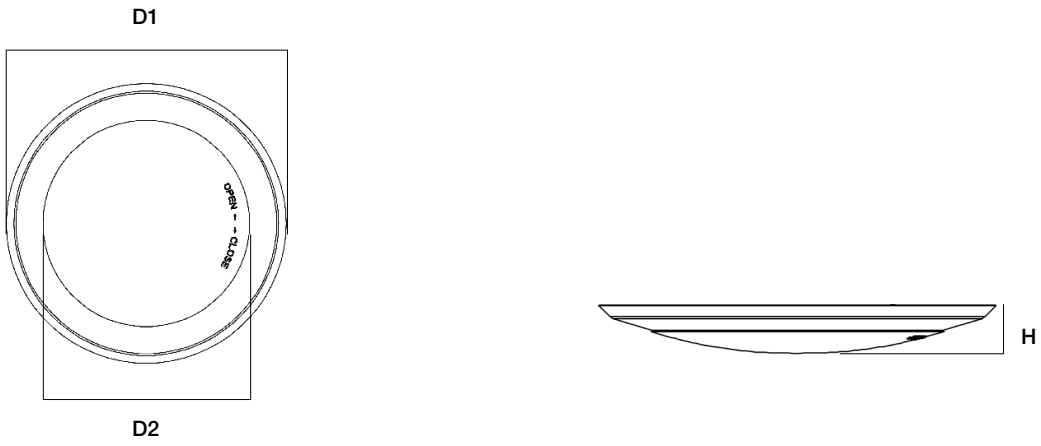

PERFORMANCE DATA

MODEL	VOLTAGE	WATTAGE	2700K		3000K		3500K		4000K		5000K	
			LUMENS	LPW	LUMENS	LPW	LUMENS	LPW	LUMENS	LPW	LUMENS	LPW
DL-G2-10	120V	10W	707	75	748	80	783	83	805	84	768	81
DL-G2-15	120V	15W	1115	77	1157	79	1231	83	1241	84	1198	83

MOTION SENSOR SETTING - DIP SWITCH

TIME DELAY SETTING	SENSOR LENS ANGLE	MOUNTING HEIGHT	COVERAGE
1 MIN	65°	MAX 14FT	14FT DIAMETER @ 14FT MOUNTING
5 MIN			
8 MIN			

Advantage Lighting Solutions® - All Rights Reserved