



# WSA SERIES WALL MOUNT CYLINDER SELECTABLE

Client:  
Project:  
Type:  
Quantity:

### CONSTRUCTION

Housing, hood and mounting stem are precision-machined from corrosion resistant aluminum, sealed with a high temperature silicone O-ring gasket to prevent water intrusion.

### OPTICS

Borosilicate glass lens is removable and accepts internal accessories such as filters to achieve multiple lighting effects. Weep holes prevent water and mineral stains from collecting on the lens, even in the straight up position.

Standard with Field CCT Selectable LED light engine for 3000K, 4000K, and 5000K (80 CRI).

### ELECTRICAL

80+ CRI Samsung LED.

-40°C up to 50°C (-40°F up to 122°F) maximum operating temperature.

100,000hr LED at L70 @ 25°C

Field Selectable Output Package (see order detail).

Driver operates at 120-277V input, 50/60Hz, <20% THD, 0.9 power factor.

Built-in photocell.

### MOUNTING

Wall mount over electrical box.

### STANDARD FINISH

Corrosion resistant Dark Bronze, Black and White powder coating finish.

### CUSTOM FINISH

Corrosion resistant Graphite Metallic, Gray, Silver, or custom RAL#

### CERTIFICATION

IP65 Wet location listed.

Meets Buy America Act requirements.

All luminaires are built to UL1598 standards and bear appropriate cULus labels.

### WARRANTY

5 year warranty, see Limited Warranty for additional information.



Double



Single

### SHIPPING DATA

Product	Measurement	Weight
WSA-S	7"L x 7"W x 7"H	5 lb
WSA-D	12"L x 7"W x 7"H	8 lb



**WSA SERIES WALL MOUNT CYLINDER SELECTABLE**

**ORDER INFORMATION** **EXAMPLE: WSA S SC BK U P**

<b>Fixture</b>	<b>Series</b>	<b>Power &amp; LM</b>	<b>CCT</b>	<b>Finish</b>	<b>Input</b>
	<b>WSA</b>		<b>SC</b>		<b>U-P</b>

Accessories  
Options

**A SERIES**

**WSA** Wall Cylinder - Dual Selectable

**B POWER & LM**

<b>Code</b>	<b>Power</b>	<b>LM</b>
<b>S</b>	Single - Field Selectable 6W / 8W / 10W	600lm / 800lm / 1,000lm
<b>D</b>	Double - Field Selectable 10W / 15W / 20W	1,000lm / 1,500lm / 2,000lm

**C CCT**

**SC** Field Selectable CCT 3000K / 4000K / 5000K

**D FINISH**

<b>Standard</b>						
<b>DB</b>	Dark Bronze	<b>BK</b>	Black	<b>WH</b>	White	
<b>Custom Color</b>						
<b>CC</b>	<b>GM</b> Graphite Metallic	<b>GR</b>	Gray	<b>SV</b>	Silver	
	<b>RAL#</b>					

**E INPUT**

**U-P** 120-277V with Built-in Photocell  
 \*see page 4 for spec


**F ACCESSORIES/OPTIONS**

**BAA** Assembled in America, compliant with BAA (COTS)  
**SURGE-LSP4-U** 10kV inline Surge Protection for Universal input / **U:** 120-277V

**WSA SERIES WALL MOUNT CYLINDER SELECTABLE**

**DIMENSIONS**

Model	H1	H2	W1	W2
WSA-S	6.50" (165mm)	4.71" (120mm)	ø4.30" (108mm)	7.00" (179mm)
WSA-D	11.60" (295mm)	4.71" (120mm)	ø4.30" (108mm)	7.00" (179mm)

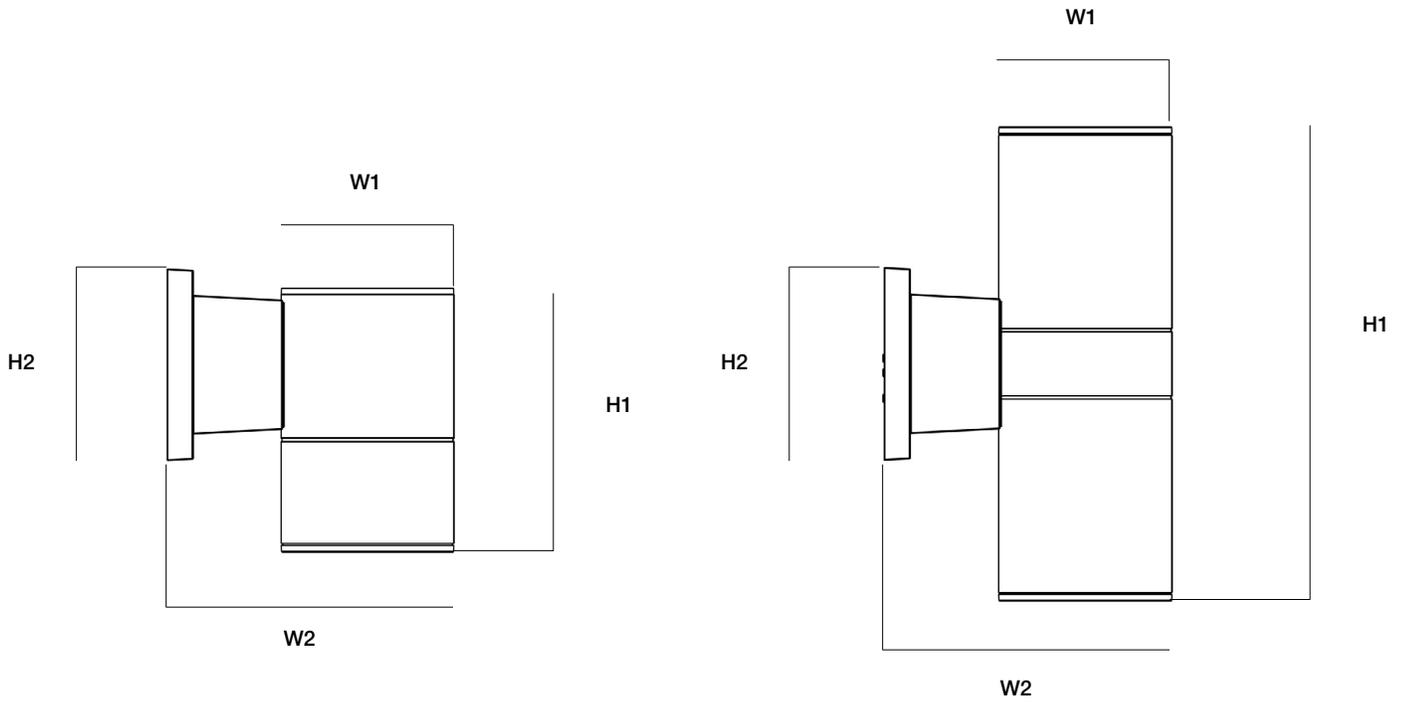

**WSA SERIES WALL MOUNT CYLINDER SELECTABLE**

**SENSOR SPEC**

Model	Type	Mounting	Coverage	Input	Function	Programmable
SENSOR-PH-PB-U	-	-	-	Universal	Dusk-to-Dawn Control	-



SENSOR-PH-PB-U