

AL2A-G2 SERIES AREA LIGHT

Client:
 Project:
 Type:
 Quantity:

CONSTRUCTION

Die-cast aluminum housing with hinged die-cast aluminum door.
 Low profile, 3G vibration rated compact design minimizes wind load requirements.
 Driver enclosure cover opens downwards, completely sealed against moisture and dusty.

OPTICS

UV-resistant polycarbonate optics, available in Type II, III, IV, V distributions.
 Full cutoff "U - 0" when mounted with 0 degrees tilt. Optics is precisely designed to shape the distribution, maximizing efficiency and application spacing.

ELECTRICAL

80 CRI Lumileds LED.
 Field Selectable Lumen / CCT Technology.
 -40°C up to 50°C (-40°F up to 122°F) maximum ambient temperature.
 Long-life 100,000 hr LED at L70 @ 40°C.
 Driver operates at 120-277V input, 0-10V dimmable driver, down to 10%.
 50/60Hz, <20% THD, 0.9 power factor.
 Optional 347/480V input.
 Optional 10kV surge protection.
 Optional dimming sensor for occupancy and photosensing.

SENSORS (OPTIONAL)

SENSOR-BLE-6-4T Plug-N-Play PIR ALS Control Bluetooth/on/off/dimming/photosensing.
 SENSOR-ANT-6-4T Plug-N-Play PIR on/off/dimming/photosensing.
 SENSOR-PH-PB-U Integral button style photocell.
 SENSOR-PH-PT-U/UD/HD Twist Lock Photocell.
 CONTROL-LVFA AVI-ON Bluetooth Mesh Controller.
 CONTROL-BLE-SK104-PH Integral Bluetooth Fixture Controller w/Button Photocell.

MOUNTING

Tilt-able pole mount bracket (SRT) suitable for both round and square pole.
 Optional slipfitter for 2-3/8" tenon (SF), adjustable trunnion mount (TR).

STANDARD FINISH

Corrosion resistant Dark Bronze powder coating finish.

CUSTOM FINISH

Corrosion resistant Black, Graphite Metallic, Gray, Silver, White, Custom RAL#.

CERTIFICATION

IP65 Wet location label standard.
 Meets Buy America Act requirements.
 IDA compliant: with 3000K color temperature selection.
 Title 24 compliant; see local ordinance for qualification information.
 All luminaires are built to UL1598 standards and bear appropriate cETLus labels.
 CE Compliance, DLC® Premium (DesignLights Consortium Qualified) listed.

WARRANTY

5 year warranty, see Limited Warranty for additional information.



450W w/SR Pole Mount



450W w/SF Mount

SHIPPING DATA

Product	Measurement	Weight
AL2A-G2-150	17"L x 13"W x 5"H	9 lb
AL2A-G2-320	24"L x 13"W x 5"H	13 lb
AL2A-G2-450	28"L x 17"W x 6"H	18 lb



AL2A-G2 SERIES AREA LIGHT

ORDER INFORMATION				EXAMPLE : AL2A-G2 150 SC T3 DB UNVD			
Fixture	Series	Power & LM	CCT	Distribution	Finish	Input	
	AL2A-G2		SC				
A SERIES							
AL2A-G2	AL2 Series Area Light Gen 2 Selectable						
B POWER & LM							
Code	Power	LM*		Efficacy (avg.)*			
150	Field Selectable 75 / 100 / 120 / 150W	11,625 / 15,500 / 18,600 / 23,250		155lm/W			
320	Field Selectable 160 / 200 / 240 / 320W	24,800 / 31,000 / 37,200 / 49,600		155lm/W			
450	Field Selectable 320 / 350 / 400 / 450W	51,200 / 56,000 / 64,000 / 72,000		160lm/W			
*LM Value & Efficacy based on 4000K, T5 Distribution							
C CCT							
SC	Field Selectable 3000K / 4000K / 5000K						
D DISTRIBUTION							
T2	Type II						
T3	Type III						
T4	Type IV						
T5	Type V						
E FINISH							
Standard							
DB	Dark Bronze						
Custom Color							
CC	BK	Black	GM	Graphite Metallic	GR	Gray	
	SV	Silver	WH	White	RAL#		
F INPUT							
UNVD	120-277V, 0-10V Dimmable						
UNVDCE	CE Compliance 120-277V, 0-10V Dimmable						
HVLD	347-480V, 0-10V Dimmable						

AL2A-G2 SERIES AREA LIGHT

ORDER INFORMATION (CONTINUED)

Mounting

Accessories Options

G MOUNTING

MOUNT-AL2A-SF	Slipfitter
MOUNT-AL2A-SRT	Square/Round Pole Tilt-able
MOUNT-AL2A-TR	Trunnion Mount

H ACCESSORIES/OPTIONS

BAA	Assembled in America, compliant with BAA (COTS)
SHIELD-AL2A-A / B / C*	Backlight Shield A: 150W, B: 320W, C: 450W
SENSOR-ANT-6-4T**	Integral PIR On/Off/Dimming/Photosensing
SENSOR-BLE-6-4T**	"Plug-N-Play" Integral Bluetooth Daylight Harvesting Sensor (ALS Control Mobile App)
SENSOR-PH-PB-U**	Button Style Photocell
SENSOR-PH-PT-U / UD / HD**	Twist Lock Photocell / U: 120-277V, UD: 120-277V, HD: 480V input
REMOTE-RC100**	Handheld Remote Commissioning Tool for SENSOR-ANT (1 per job)
SURGE-LSP4-U / H	10kV Inline Surge Protection for Universal Input / U: 120-277V, H: 480V Input
CONTROL-LVFA*	AVI-ON Bluetooth Mesh Control System
CONTROL-BLE-SK104-PH*	Integral Bluetooth Fixture Controller w/Button Photocell (ALS Control Mobile App)


*see page 6 for Shield spec

**see page 7 for Sensor spec


AL2A-G2 SERIES AREA LIGHT

DIMENSIONS


Model	L	W	H	Weight
AL2A-G2-150	15.90" (405mm)	12.00" (305mm)	2.70" (69mm)	7.7 lbs
AL2A-G2-320	22.70" (577mm)	12.00" (305mm)	2.80" (72mm)	10.8 lbs
AL2A-G2-450	24.30" (617mm)	14.80" (375mm)	3.70" (94mm)	16.5 lbs

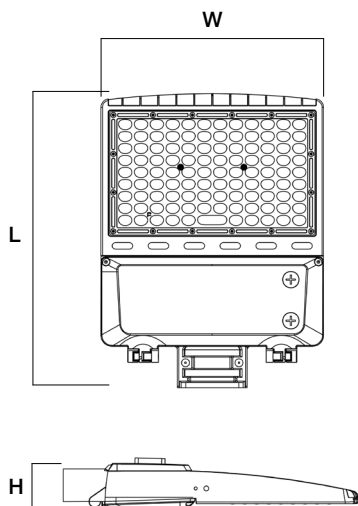

AL2A-G2-150

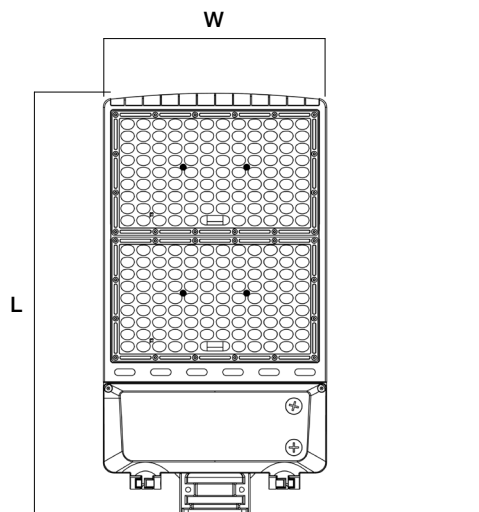

AL2A-G2-320

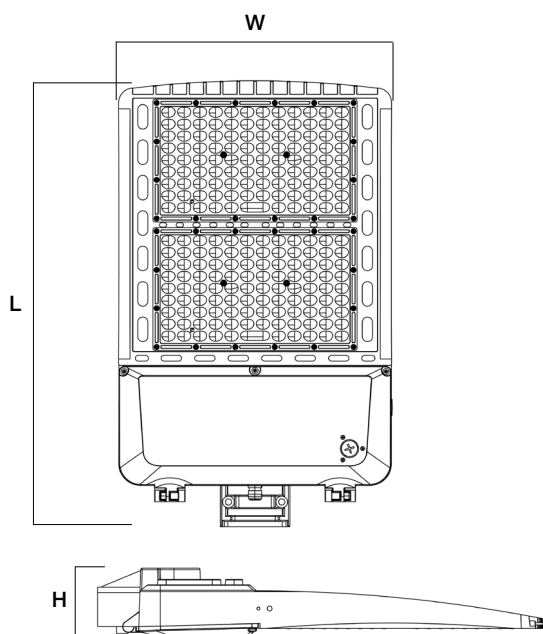

AL2A-G2-450

AL2A-G2 SERIES AREA LIGHT

ACCESSORIES - MOUNTING



MOUNT-AL2A-SF



MOUNT-AL2A-SRT



MOUNT-AL2A-TR




ACCESSORIES - SHIELD



SHIELD-AL2A-A / B / C

A: 150W
 B: 320W
 C: 450W

EPA (ft²)

							
Mounting Option	Single	2 @ 90°	2 @ 120°	2 @ 180°	3 @ 90°	3 @ 120°	4 @ 90°
150W	0.227	0.386	0.505	0.454	0.613	0.664	0.613
320W	0.316	0.537	0.703	0.632	0.853	0.925	0.853
450W	0.440	.0748	0.979	0.880	1.188	1.287	1.188

AL2A-G2 SERIES AREA LIGHT

PERFORMANCE DATA

SYSTEM WATTS	DIST. TYPE	3000K			4000K			5000K		
		LUMEN	LPW	BUG RATING	LUMEN	LPW	BUG RATING	LUMEN	LPW	BUG RATING
AL2A-G2-150 @ 100W	II	16836	162	B3-U0-G2	18120	180	B3-U0-G2	17760	171	B3-U0-G2
	III	16980	163	B3-U0-G2	18298	182	B3-U0-G2	17757	171	B3-U0-G2
	IV	17005	164	B3-U0-G2	18170	181	B3-U0-G2	17884	171	B3-U0-G2
	V	17083	164	B3-U0-G3	18192	181	B4-U0-G3	17899	172	B4-U0-G3
AL2A-G2-150 @ 120W	II	19625	158	B3-U0-G3	21111	177	B3-U0-G3	20444	165	B3-U0-G3
	III	19615	158	B3-U0-G2	21336	179	B3-U0-G2	20474	165	B3-U0-G2
	IV	19659	158	B3-U0-G2	21212	178	B3-U0-G3	20495	165	B3-U0-G3
	V	19702	159	B4-U0-G3	21144	178	B4-U0-G3	20765	167	B4-U0-G2
AL2A-G2-150 @ 135W	II	21551	154	B4-U0-G3	23309	174	B4-U0-G3	22533	161	B4-U0-G3
	III	21396	153	B3-U0-G2	23681	177	B4-U0-G3	22745	163	B4-U0-G3
	IV	21538	154	B3-U0-G3	23383	175	B3-U0-G3	22636	162	B3-U0-G3
	V	21611	155	B4-U0-G3	23347	175	B4-U0-G3	23063	163	B4-U0-G3
AL2A-G2-150 @ 150W	II	23772	150	B4-U0-G3	26143	173	B4-U0-G3	24795	157	B4-U0-G3
	III	23732	151	B4-U0-G3	26160	175	B4-U0-G3	25440	161	B4-U0-G3
	IV	23621	150	B3-U0-G3	25788	172	B3-U0-G3	25052	158	B3-U0-G3
	V	23775	151	B4-U0-G3	25833	173	B4-U0-G3	25118	159	B4-U0-G3
AL2A-G2-320 @ 240W	II	39389	162	B5-U0-G4	42313	181	B5-U0-G4	41579	170	B5-U0-G4
	III	39315	161	B5-U0-G3	42201	180	B5-U0-G3	41542	169	B5-U0-G3
	IV									
	V									
AL2A-G2-320 @ 280W	II	44085	157	B5-U0-G4	48190	178	B5-U0-G4	46487	165	B5-U0-G4
	III	43907	157	B5-U0-G3	48098	177	B5-U0-G4	46443	164	B5-U0-G3
	IV									
	V									
AL2A-G2-320 @ 300W	II	46478	155	B5-U0-G4	51394	177	B5-U0-G4	48964	162	B5-U0-G4
	III	46287	154	B5-U0-G3	51067	176	B5-U0-G4	48875	162	B5-U0-G4
	IV									
	V									
AL2A-G2-320 @ 320W	II	48763	153	B5-U0-G4	54022	175	B5-U0-G4	52210	162	B5-U0-G4
	III	48543	152	B5-U0-G4	53869	174	B5-U0-G4	52231	162	B5-U0-G4
	IV									
	V									
AL2A-G2-450 @ 320W	II									
	III									
	IV									
	V									
AL2A-G2-450 @ 350W	II									
	III									
	IV									
	V									
AL2A-G2-450 @ 400W	II									
	III									
	IV									
	V									
AL2A-G2-450 @ 450W	II									
	III									
	IV									
	V									

AL2A-G2 SERIES AREA LIGHT

SENSOR SPEC

Model	Type	Mounting	Coverage	Input	Function	Programmable
SENSOR-ANT-6-4T (see page 8 for detail)	PIR	up to 40FT	30FT radius	12V DC	On/Off/Dimming	REMOTE-RC100
SENSOR-BLE-6-4T (see page 9 for detail)	PIR	up to 40FT	30FT radius	12V DC	Bluetooth Mesh On/Off/Dimming Daylight Harvesting	ALS Control Bluetooth Mobile App
SENSOR-PH-PB-U (see page 11 for detail)	-	-	-	Universal	Dusk-to-Dawn Control	-
SENSOR-PH-PT-U SENSOR-PH-PT-UD SENSOR-PH-PT-HD (see page 12 for detail)	-	-	-	Universal 277 ~ 480V	Dusk-to-Dawn Control	-
CONTROL-LVFA (see page 13 for detail)	Fixture Controller	-	-	12V DC	Bluetooth Mesh On/Off/Dimming Scheduling	AVI-ON Bluetooth Mobile App
CONTROL-BLE-SK104-PH (see page 14 for detail)	Fixture Controller			12V DC	Bluetooth Mesh On/Off/Dimming Scheduling CCT Tuning	ALS Control Bluetooth Mobile App



SENSOR-ANT-6-4T
SENSOR-BLE-6-4T



SENSOR-PH-PB-U



SENSOR-PH-PT-U/UD/HD



CONTROL-LVFA



CONTROL-BLE-SK104-PH

FEATURE


- **Installation:** Plug-N-Play via AUX Socket on Attached Fixture
- **Commissioning:** through Remote Control
- **Control:** Hold time, High-Low setting, Continuous Bi-Level Dimming, Code-Compliant Manual-On or Auto-Off Capability
- **Sensor:** Motion (Occupancy/Vacancy/Manual) and Daylight
- **Factory Default:** 100% Sensitivity / Hold on Time: 5mins / Daylight Sensor is ☼ / Dimming Level: 30% / Dimming Time: 60mins



SPECIFICATIONS



SENSOR TYPE:	Passive Infrared Sensor (PIR)
STANDARD OPTION:	SENSOR-ANT-6-4T
EMB OPTION:	SENSOR-ANT-6-4T-EM (Designed for fixtures with emergency kit. When the voltage power is off, the sensor will stop working.)
INPUT VOLTAGE:	12-24VDC, >30mA
LIGHT CONTROL:	10 ~ 50LUX
CONTROL OUTPUT:	0-10V
OPERATING TEMP:	-4°F ~ +140°F (-20°C ~ +60°C)
COMMISSIONING RANGE:	50FT from Remote Control
TIME SETTING:	10sec ~ 60min (adjustable)
DETECTION ANGLE:	360°
MOUNTING HEIGHT:	Up to 50FT.
WARRANTY:	5 years
IP RATING:	IP65

DIMENSIONS

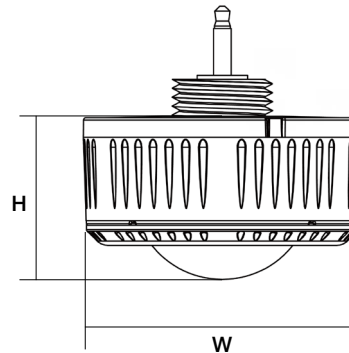

H	W
1.03" (26.2mm)	2.17" (55mm)

COVERAGE PATTERNS

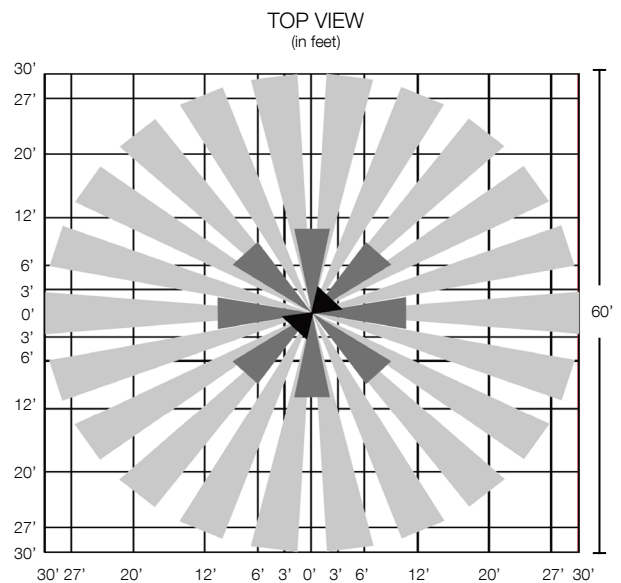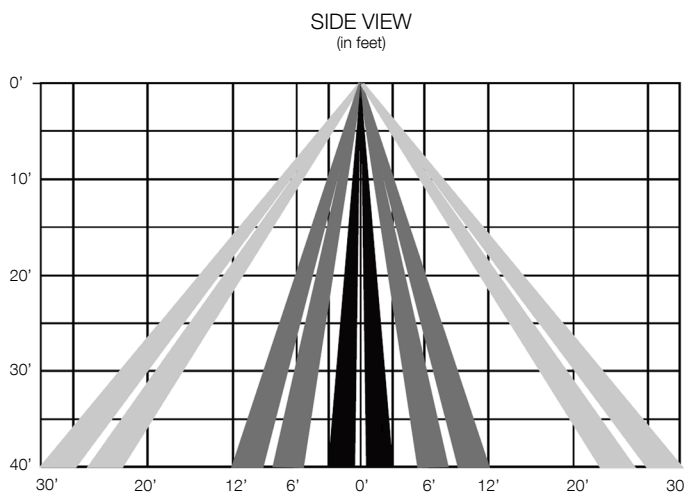

ORDER CODES

SENSOR-ANT-6-4T	Plug-N-Play PIR on/off/dimming/photosensing up to 40FT MH
SENSOR-ANT-6-4T-EM	Plug-N-Play PIR on/off/dimming/photosensing for EMB application up to 40FT MH
SENSOR-ANT-6-4T-H	Plug-N-Play PIR on/off/dimming/photosensing up to 50FT MH
SENSOR-ANT-6-4T-H-EM	Plug-N-Play PIR on/off/dimming/photosensing for EMB application up to 50FT MH




FEATURE

- **Installation:** Plug-N-Play via AUX socket on attached fixture
- **Commissioning:** Wirelessly through ALS Control Mobile App (iOS / Android)
- **Certification:** DLC 5.1 Networked Lighting Control System
- **Control:** Hold time, High-Low setting, continuous Bi-level dimming, Code-compliant manual-on or auto-off capability
- **Sensor:** Motion (Occupancy/Vacancy/Manual) and Daylight Harvesting
- **Room and Zone Control:** Zoning and Grouping control, Scheduling

SPECIFICATIONS



SENSOR TYPE:	Passive Infrared Sensor (PIR)
WIRELESS STANDARDS:	5.0 Bluetooth Mesh
STANDARD OPTION:	SENSOR-BLE-6-4T
EMB OPTION:	SENSOR-BLE-6-4T-EM (Designed for fixtures with emergency kit. When the voltage power is off, the sensor will stop working.)
INPUT VOLTAGE:	12-24VDC, >50mA
CONTROL OUTPUT:	0-10V
OPERATING TEMP:	-4°F ~ +140°F (-20°C ~ +60°C)
COMMISSIONING RANGE:	50FT
BLUETOOTH RANGE:	164FT
DETECTION ANGLE:	360°
MOUNTING HEIGHT:	Up to 40FT
WARRANTY:	5 years
IP RATING:	IP65
FACTORY DEFAULT SETTINGS:	100% Brightness for 5 min Dim Down to 30% Hold for 10 min Turn Off

DIMENSIONS

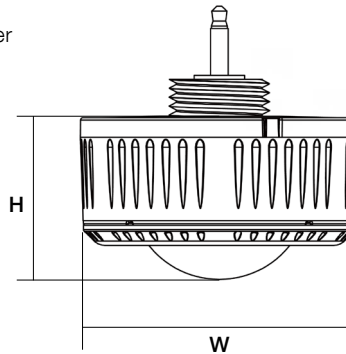

H	W
1.03" (26.2mm)	2.17" (55mm)

COVERAGE PATTERNS

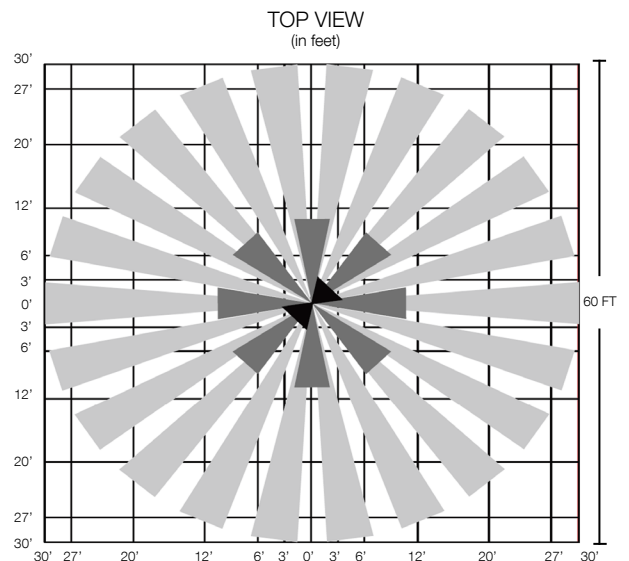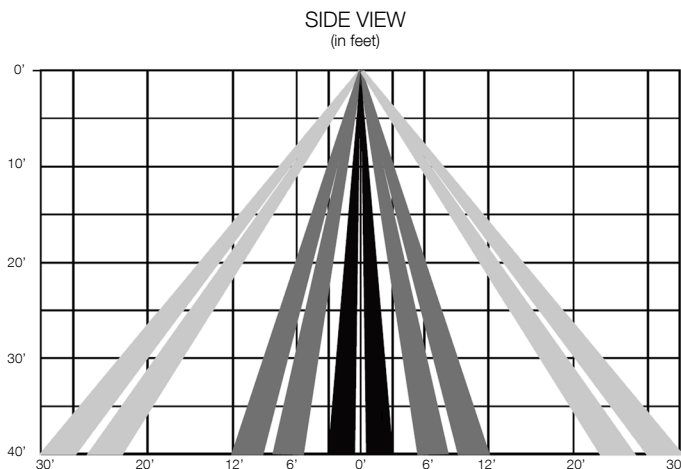

ORDER CODES

SENSOR-BLE-6-4T	"Plug-N-Play" Integral Bluetooth Daylight Harvesting Sensor (ALS Control Mobile App) up to 40FT MH.
SENSOR-BLE-6-4T-EM	"Plug-N-Play" Integral Bluetooth Daylight Harvesting Sensor (ALS Control Mobile App) up to 40FT MH w/ EMB.
SENSOR-BLE-6-4T-H	"Plug-N-Play" Integral Bluetooth Daylight Harvesting Sensor (ALS Control Mobile App) up to 50FT MH.
SENSOR-BLE-6-4T-H-EM	"Plug-N-Play" Integral Bluetooth Daylight Harvesting Sensor (ALS Control Mobile App) up to 50FT MH w/ EMB.



FEATURE

The Remote control wireless IR configuration tool is a handheld tool for remote configuration of IR-enabled fixture integrated sensors. The tool enables device to modify via push button and stores up to four sensor parameter modes to speed configuration of multiple sensors.

	PROGRAMMABLE	RESET
COMPATIBLE SENSORS	SENSOR-ANT-6-4T SENSOR-ANT-6-4T-EM SENSOR-ANT-6-4T-H SENSOR-ANT-6-4T-H-EM SENSOR-ANT-7 SENSOR-ANT-3C-B1 SENSOR-819-D1/D2 SENSOR-823 SENSOR-820	SENSOR-BLE-6-4T SENSOR-BLE-7 SENSOR-BLE-7D SENSOR-BLE-819 SENSOR-BLE-619 CONTROL-BLE-5-4T WALLSWITCH-BLE-101 WALLSWITCH-BLE-204

SPECIFICATION

Carrying Case

RC-100 in Carrying Case

Commissioning Range

Up to 50FT (15mm)

Operating Temp

32F ~ 122F (0°C ~ 50°C)

Power

2 x AAA 1.5V Alkaline batteries



Dimension

L - 4.84" (123mm)
W - 2.76" (70mm)
H - .80" (20.3mm) Thickness

BRIGHTNESS

Set output level (in 70%, 80%, 90%, or 100%) of connected lighting during occupancy.

SENSITIVITY

Set the sensitivity (in 20%, 50%, 75%, or 100%) of the occupancy sensor.

HOLD TIME

Set the time (in 10s, 1m, 5m, 10m, 16m, 20m, 30m, or 60m) that the fixture will hold at normal output after the space is vacant.

DAYLIGHT SENSOR

Set the threshold of natural light (in 10, 30, or 50) as setpoint to light on automatically for the sensor. If natural light is above the selected threshold, fixture will shut off. Set daylight (in 100, 300, 500) as setpoint to light off.

STAND-BY DIM/TIME

DIM: Set the output level (in 0%, 10%, 30%, or 50%) of the fixture during vacancy. This will only take place after Hold Time has elapsed.


TIME: Set the time (+∞, 1m, 30m, or 50m) that the sensor will remain in stand-by mode before powering down.

ON/OFF

Use this to manually power a fixture on or off.

AUTO

Press Auto to engage/unlock a sensor.
Press Auto, then press Display to show the sensors current setting parameters.

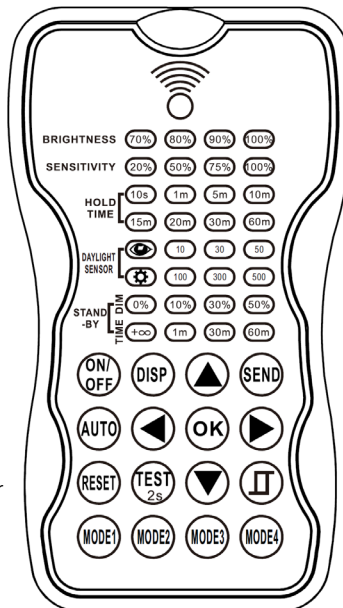

DISPLAY

Press to Display to view current setting parameters for each function. LED indicators will highlight current settings.

DIRECTIONAL ARROWS

Use the arrows to navigate the setting options by pressing up/down or left/right.

SEND

Press Send to upload displayed settings to individual sensor/fixture. The fixture will blink on and off to confirm new settings.

SMART DAYLIGHT SENSOR

Open and or close smart daylight sensor.
Press up/down arrows buttons to enter setting condition, the parameters LEDs of remote control will flash to be selected.

TEST

Used to test sensitivity of occupancy sensing.
Press Test, then the fixture will enter Test Mode, where Hold Time is only 2s.
While Test Mode is active, Stand-By and Daylight sensing will be disabled.
Press Auto to exit Test Mode.

RESET

Press Reset to put all parameters back to default settings.

MODE

Press the Mode # that you want to save.
Use Directional Arrows to select new parameters.
Press OK to confirm.

SENSOR-PH-PB-U BUTTON PHOTOCELL


Client:
Project:
Type:
Quantity:

FEATURE


- **Installation:** Factory Install - Integral to Fixture
- **Sensor:** Dusk-to-Dawn Control

SPECIFICATIONS

SENSOR TYPE:	Photocell
INPUT VOLTAGE:	Universal 120-277VAC
ON-OFF LEVELS:	10 ~ 50LUX On (Dusk) 30 ~ 80LUX Off (Dawn)
POWER CONSUMPTION:	2W
OPERATING TEMP:	-40°F ~ +158°F (-40°C ~ +70°C)
RATED FREQUENCY:	50/60Hz
RATED LOADING:	Tungsten: 1000W Ballast: 1800VA
TIME DELAY:	2.3 - 10 seconds
RELATIVE HUMIDITY:	99%
WARRANTY:	5 years

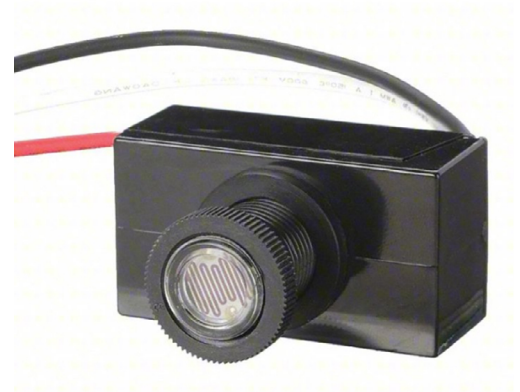

DIMENSIONS

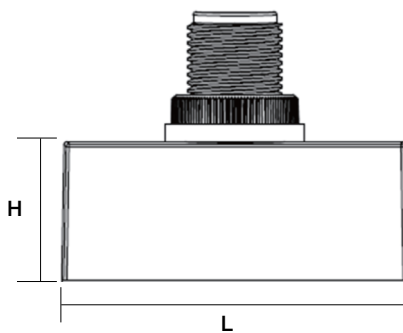

L	H
2.05" (52mm)	.91" (23mm)

ORDER CODES

SENSOR-PH-PB-U Button Style Photocell



SENSOR-PH-PT TWIST-LOCK PHOTOCELL

Client:
 Project:
 Type:
 Quantity:


FEATURE

- **Installation:** Factory Install - Integral to Fixture
- **Control:** Hold time, High-Low setting, continuous Bi-level dimming, manual/auto - on/off
- **Sensor:** Dusk-to-Dawn Control

SPECIFICATIONS

SENSOR TYPE:	Twist-Lock Photocell
INPUT VOLTAGE:	110-277VAC
ON-OFF LEVELS:	50LUX
POWER CONSUMPTION:	1.2W
SURGE PROTECTION:	40,000Amp
OPERATING TEMP:	-40°F ~ +158°F (-40°C ~ +70°C)
RATED FREQUENCY:	50/60Hz
RATED LOADING:	Tungsten: 1000W Ballast: 1800VA, 5A e-Ballast
TIME DELAY:	10 seconds
RELATIVE HUMIDITY:	99%
DIELECTRIC STRENGTH:	5000Vrms
IP RATING:	IP65
WARRANTY:	5 years

DIMENSIONS

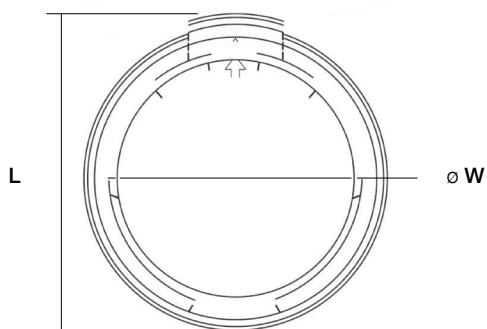

L	W
3.31" (84mm)	ø 3.40" (ø 86mm)

ORDER CODES

SENSOR-PH-PT-U	Twist-Lock 3-Pin (Wet) Photocell, 120-277V Input
SENSOR-PH-PT-UD	Twist-Lock 7-Pin (Wet) Photocell, 120-277V Input
SENSOR-PH-PT-HD	Twist-Lock 7-Pin (Wet) Photocell, 480V Input



AL2A-G2 SERIES AREA LIGHT

CONTROL-LVFA SPEC

Status LEDs & Config Button

Quick and easy validation of wiring and network

Direct Connect™ Sensor Port

Simple and cost-effective addition to Avi-on sensors

Terminal Blocks & Mounting Tabs

Faster, easier and lower cost installation eliminating connectors



Internal Antenna

Improved performance and eliminates risk of accidentally cutting a hanging wire


SPECIFICATIONS

INPUT VOLTAGE: 12-24VDC
CURRENT: 15mA without a Sensor
 19mA with a DC PIR Sensor
 48mA with a DC Microwave Sensor
0-10V DIMMING: 12-24VDC
SIZE: 2.30in x 1.43in x 0.75in
 (58.2mm x 36.4mm x 19mm)
MOUNTING: Removable mounting tabs
WEIGHT: 0.45 oz (16g)
OPERATING TEMP: -22°F to +158°F (-30°C to + 70°C)


RADIO FREQUENCY: 2.4GHz
WIRELESS STANDARD: BLE 4.2 with Mesh
POINT TO POINT RANGE*: 80ft with obstructions
 350ft unobstructed
SECURITY: AES 128-bit encryption for device to device communication
 AES 256-bit encryption for device to cloud communication
 5 years; 10 years optional
WARRANTY: FCC: 2AFZI-AVI1010 B
 IC: 20544-AVI1010 B
 BQB: D031801, DID: 86303
 UL 916, 2043 (Plenum Rated)

*When communicating through the mesh, range is essentially unlimited (5000ft+)

WIRING DIAGRAM

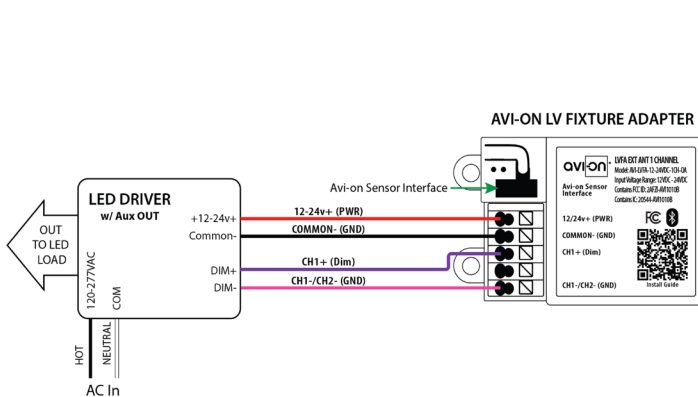

Fixture adapter powered by LED driver auxiliary output

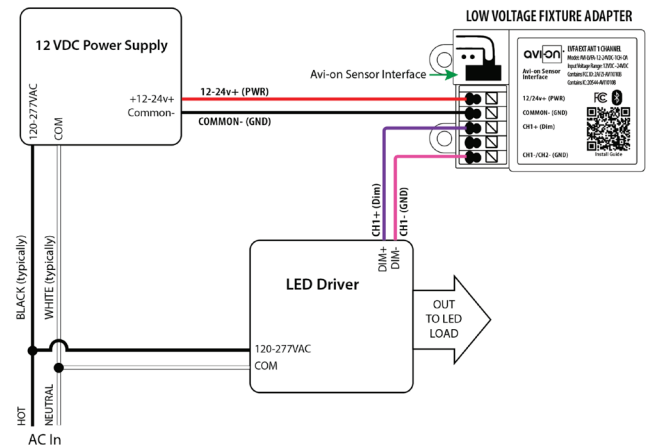

Fixture adapter connected to LED driver and using power supply

FEATURE


- **Installation:** Factory / Jobsite install through 1/2" knockout hole, 12V AUX power required
- **Commissioning:** Wirelessly through ALS Control Mobile App (iOS / Android)
- **Certification:** DLC 5.1 Networked Lighting Control System
- **Control:** High-End Trim, Zoning, Continuous Bi-level Dimming
- **CCT Tuning:** CCT Tuning feature for Dual/Multi-CCT LED board fixture only
- **Sensor:** Photocell
- **Zone Control:** Zoning and Grouping control, Scheduling



SPECIFICATIONS

SENSOR TYPE:	Photocell
WIRELESS STANDARDS:	5.0 Bluetooth Mesh
INPUT VOLTAGE:	10-14VDC, >50mA
CONTROL OUTPUT:	0-10V
OPERATING TEMP:	-40°F ~ +158°F (-40°C ~ +70°C)
COMMISSIONING RANGE:	50FT
BLUETOOTH RANGE:	100FT
DETECTION ANGLE:	360°
WARRANTY:	5 years
IP RATING:	IP65

DIMENSIONS

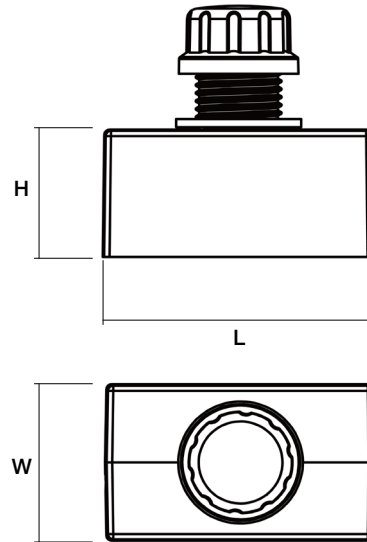

L	H	W
1.14" (29mm)	0.94" (24mm)	1.97" (50mm)

WIRING DIAGRAM

