



# WFM SERIES FULL CUTOFF WALL PACK TILT-ABLE

Client:  
Project:  
Type:  
Quantity:

### CONSTRUCTION

Low profile architectural style wall pack, sleek and modern design, die-cast aluminum housing provides excellent thermal management.  
Suitable for applications requiring 3G testing prescribed by ANSI C136.31.

### OPTICS

Individual acrylic LED optics provide IES Type III distribution.  
Light engines available between 4000K, 5000K (70+ CRI)  
Selectable CCT light engine available between 3000K-5000K (70+ CRI).



### ELECTRICAL

70+ CRI Lumileds LED.  
-40°C up to 40°C (-40°F up to 104°F) maximum operating temperature.  
>54,000 hr LED at L70.  
Driver operates at 120-277V input, 50/60Hz, <20% THD, 0.9 power factor, 1-10V dimmable.  
Optional 10kV surge protection.



### MOUNTING

Wall mount over electrical box or via surface conduit.  
0° to +90° tilt adjustment.

### STANDARD FINISH

Corrosion resistant Dark Bronze powder coating finish.

### CERTIFICATION

Wet Location Listed.  
Meets Buy America Act requirements.  
All luminaires are built to UL1598 standards and bear appropriate cULus labels.  
DLC® Premium (DesignLights Consortium Qualified) listed.

### SHIPPING DATA

Product	Measurement	Weight
WFMA-40	10"L x 8"W x 5"H	4 lb
WFMA-80	12"L x 11"W x 6"H	8 lb

### WARRANTY

5 year warranty, see Limited Warranty for additional information.



**WFM SERIES FULL CUTOFF WALL PACK TILT-ABLE**


ORDER INFORMATION				EXAMPLE: WFMA 80 SC DB U P		
Fixture	Series	Power & LM	CCT	Finish	Input	Photocell
	<b>WFMA</b>		<b>SC</b>	<b>DB</b>	<b>U</b>	<b>P</b>
Accessories Options						
<b>A</b>	<b>SERIES</b>					
	<b>WFMA</b>	Selectable Full Cutoff Wall Pack Tilt-able				
<b>B</b>	<b>POWER &amp; LM</b>					
	<b>Code</b>	<b>Power</b>	<b>Lumen</b>	<b>LM/W</b>		
	40	Field Selectable 16W / 24W / 32W / 40W	2800lm / 3950lm / 5100lm / 6200lm	164 (avg.)		
	80	Field Selectable 32W / 48W / 64W / 80W	5400lm / 7800lm / 10100lm / 12200lm	161 (avg.)		
<b>C</b>	<b>CCT</b>					
	<b>SC</b>	Field Selectable 3000K ~ 5000K				
<b>D</b>	<b>FINISH</b>					
	<b>DB</b>	Dark Bronze				
<b>E</b>	<b>INPUT &amp; CONTROL</b>					
	<b>U-P</b>	120-277V, w/Built-in Photocell				
<b>F</b>	<b>ACCESSORIES/OPTIONS</b>					
	<b>BAA</b>	Assembled in America, compliant with BAA (COTS)				
	<b>SURGE-LSP4-U</b>	10kV inline Surge Protection for Universal input / <b>U:</b> 120-277V				

**WFM SERIES FULL CUTOFF WALL PACK TILT-ABLE**


**DIMENSIONS**

Model	L	W	D
WFMA-40	9.31" (232mm)	7.29" (185mm)	4.20" (107mm)
WFMA-80	11.02" (280mm)	10.06" (256mm)	5.09" (129mm)


Front

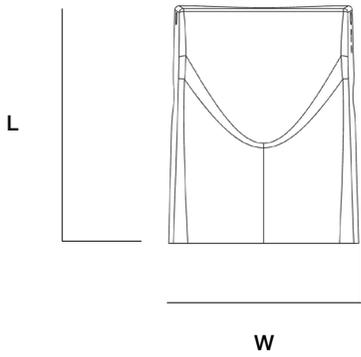

Side



Bottom



**WFM SERIES FULL CUTOFF WALL PACK TILT-ABLE**

**PERFORMANCE DATA**

SYSTEM WATTS	VOLTAGE	3000K		4000K		5000K	
		LUMENS	LPW	LUMENS	LPW	LUMENS	LPW
WFMA-40 @ 16W	120-277V	2,600	163	2,800	175	2,650	166
WFMA-40 @ 24W	120-277V	3,700	154	3,950	165	3,800	158
WFMA-40 @ 32W	120-277V	4,700	147	5,100	159	4,800	150
WFMA-40 @ 40W	120-277V	5,600	140	6,200	155	5,800	145
WFMA-80 @ 32W	120-277V	5,050	158	5,400	169	5,200	163
WFMA-80 @ 48W	120-277V	7,300	152	7,800	163	7,500	156
WFMA-80 @ 64W	120-277V	9,300	145	10,100	158	9,600	150
WFMA-80 @ 80W	120-277V	11,200	140	12,200	153	1,1500	144