Client:
Project:
Type:
Quantity:

ES SERIES LED EXIT SIGN

CONSTRUCTION
Sturdy thermoplastic, injection molded, V-0 flame retardant, high impact resistant housing.

OPTICS
Two “EXIT” Faceplates (with optional knockout arrows) and one blank faceplate included.
Color-matched diffuser eliminates hots spots and striations, providing optimal light output.

ELECTRICAL
0°C up to 40°C (32°F up to 104°F) maximum operating temperature. Designed for an expected life of 50,000 hours.

MOUNTING
Easy to install. Universal mounting canopy for top or side installation.
Mounting canopy, installation instructions & hardware (inside unit).

STANDARD FINISH
Black Finish
White Finish

CERTIFICATION
All luminaires are built to UL1598 standards and bear appropriate cETLus labels.
All luminaires are built to UL924 standards and bear appropriate cULus labels.

WARRANTY
5 year warranty, see Limited Warranty for additional information

Green “EXIT” Letters

Red “EXIT” Letters

SHIPPING DATA

Product	Measurement	Weight
ES	12”L x 9”W x 3”H	3 lb

ES SERIES LED EXIT SIGN

ORDER INFORMATION

EXAMPLE: ES R WH EM

Fixture	Series	"EXIT" Color	Finish	Input
	ES		WH	EM

A SERIES

ES	LED Exit Sign

B "EXIT" COLOR

Code	Color
G	Green
R	Red

C FINISH

BK	Black
WH	White

D INPUT

EM	120 Minute Battery

E ACCESSORIES/OPTIONS

BAA	Assembled in America, compliant with BAA (COTS)

ES SERIES LED EXIT SIGN

DIMENSIONS
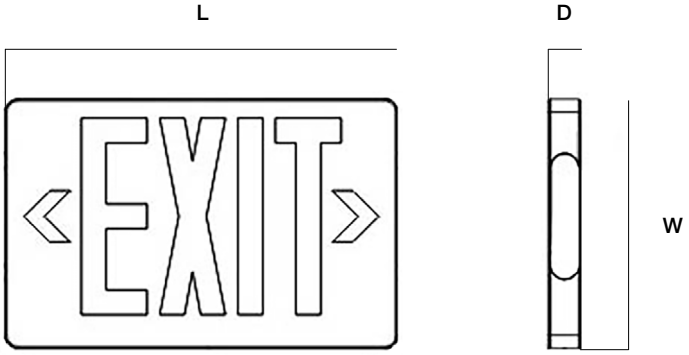
Series	L	W	D
ES	12.01” (305mm)	7.99” (203mm)	2.09” (53mm)