

Client: \_\_\_\_\_ Project: \_\_\_\_\_ Type: \_\_\_\_\_ Qty: \_\_\_\_\_

Technical Specifications

- INPUT VOLTAGE**  
AC 120~277V
- FREQUENCY**  
60HZ
- COLOR TEMPERATURE**  
6500K
- IP RATING**  
IP20
- OPERATING TEMPERATURE**  
0°C~+40°C
- LIFE SPAN**  
50,000hrs

Product Showcase


### FEATURES

- Thin, low profile exit sign to meet any safety needs.
- Sturdy thermoplastic polymer construction, with long-lasting LED and knock-out left/right arrows.
- Easy to install. Available for wall, ceiling and side mounting.
- UL 924 compliant. Provides uninterrupted emergency operation for at least 90 minutes.
- UL/cUL Listed



Product Features

Dimensions

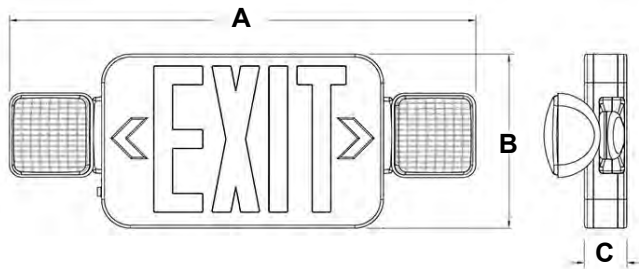

A	B	C
550mm (21.65")	203mm (7.99")	100mm (3.94")

Ordering Information

ES -  Color - COMBO - WH EM

Series	"EXIT" Color	COMBO	Finish	Input Voltage
ES	G - Green R - Red	COMBO - with emergency lights (100lm)	WH - White	EM - 120-277V w/ 90 minutes emergency duration