

**WFM SERIES FULL CUTOFF WALL PACK TILT-ABLE**

Client:  
 Project:  
 Type:  
 Quantity:

**CONSTRUCTION**

Low profile architectural style wall pack, sleek and modern design, die-cast aluminum housing provides excellent thermal management.  
 Suitable for applications requiring 3G testing prescribed by ANSI C136.31.

**OPTICS**

Individual acrylic LED optics provide IES Type III distribution.  
 Light engines available between 4000K, 5000K (70+ CRI)



**ELECTRICAL**

70+ CRI Lumileds LED.  
 -40°C up to 40°C (-40°F up to 104°F) maximum operating temperature.  
 >54,000 hr LED at L70.  
 Driver operates at 120-277V input, 50/60Hz, <20% THD, 0.9 power factor, 1-10V dimmable.  
 Optional 10kV surge protection.



**SENSOR (OPTIONAL)**

SENSOR-PH-PB-U Integral Button Style Photocell.

**MOUNTING**

Wall mount over electrical box or via surface conduit.  
 0° to +90° tilt adjustment.

**STANDARD FINISH**

Corrosion resistant Dark Bronze powder coating finish.

**CERTIFICATION**

Wet Location Listed.  
 Meets Buy America Act requirements.  
 All luminaires are built to UL1598 standards and bear appropriate cULus labels.  
 DLC® Premium (DesignLights Consortium Qualified) listed.

**WARRANTY**

5 year warranty, see Limited Warranty for additional information.

**SHIPPING DATA**

Product	Measurement	Weight
WFM-27	10”L x 8”W x 5”H	4 lb
WFM-40	10”L x 8”W x 5”H	4 lb
WFM-67	12”L x 11”W x 6”H	8 lb
WFM-80	12”L x 11”W x 6”H	8 lb



**WFM SERIES FULL CUTOFF WALL PACK TILT-ABLE**

ORDER INFORMATION				EXAMPLE: WFM 27 50 T3 DB U	
Fixture	Series	Power & LM	CCT	Finish	Input
	<b>WFM</b>			<b>DB</b>	<b>U</b>
Accessories Options					

<b>A</b>	SERIES	
WFM	Full Cutoff Wall Pack Tilt-able	

<b>B</b>	POWER & LM			
Code	Power	Lumen	LM/W	
27	27W	3600lm	133	
40	40W	5200lm	130	
67	67W	8800lm	131	
80	80W	10500lm	131	

<b>C</b>	CCT	
40	4000K	
50	5000K	

<b>D</b>	FINISH	
Standard		
DB	Dark Bronze	

<b>E</b>	INPUT	
U	110-277V	

<b>F</b>	ACCESSORIES/OPTIONS	
AIA	Assembled in America, compliant with BAA (COTS)	
SENSOR-PH-PB-U*	Button Style Photocell	
SURGE-LSP4-U / H	10kV inline Surge Protection for Universal input / <b>U</b> : 120-277V, <b>H</b> : 480V input	


\*see page 5 for sensor spec

**WFM SERIES FULL CUTOFF WALL PACK TILT-ABLE**


**DIMENSIONS**

Model	L	W	D
WFM-27 / 40	9.31" (232mm)	7.29" (185mm)	4.20" (107mm)
WFM-67 / 80	11.02" (280mm)	10.06" (256mm)	5.09" (129mm)


**Front**

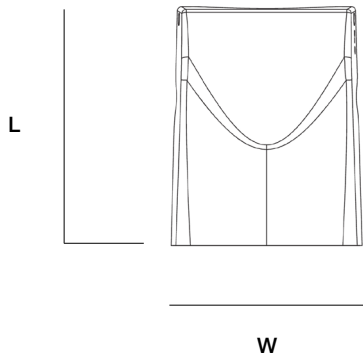

**Side**



**Bottom**



## WFM SERIES FULL CUTOFF WALL PACK TILT-ABLE

### PERFORMANCE DATA

SYSTEM WATTS	VOLTAGE	4000K		5000K	
		LUMENS	LPW	LUMENS	LPW
WFM-27	120-277V	3,600	133	3,600	133
WFM-40	120-277V	5,200	130	5,200	130
WFM-67	120-277V	8,800	131	8,800	131
WFM-80	120-277V	10,500	131	10,500	131

### DLC CODE

Part Number	DLC Part Number	DLC Class
WFM - 27 - 40 - T3 - DB - U	OEM DLC: MWP1027W27V40K[D,B,W][Blank,P0]D[Blank,A-Z,a-z,0-9] Product ID: PLLGA20A	Premium
WFM - 27 - 50 - T3 - DB - U	OEM DLC: MWP1027W27V50K[D,B,W][Blank,P0]D[Blank,A-Z,a-z,0-9] Product ID: PZ3ORBRN	Premium
WFM - 40 - 40 - T3 - DB - U	OEM DLC: MWP1040W27V40K[D,B,W][Blank,P0]D[Blank,A-Z,a-z,0-9] Product ID: P73Z2I7B	Premium
WFM - 40 - 50 - T3 - DB - U	OEM DLC: MWP1040W27V50K[D,B,W][Blank,P0]D[Blank,A-Z,a-z,0-9] Product ID: PZD2MI1F	Premium
WFM - 67 - 40 - T3 - DB - U	OEM DLC: MWP1067W27V40K[D,B,W][Blank,P0]D[Blank,A-Z,a-z,0-9] Product ID: PB5BM14J	Premium
WFM - 67 - 50 - T3 - DB - U	OEM DLC: MWP1067W27V50K[D,B,W][Blank,P0]D[Blank,A-Z,a-z,0-9] Product ID: PUCVFQDV	Premium
WFM - 80 - 40 - T3 - DB - U	OEM DLC: MWP1080W27V40K[D,B,W][Blank,P0]D[Blank,A-Z,a-z,0-9] Product ID: PRSMLEOE	Premium
WFM - 80 - 50 - T3 - DB - U	OEM DLC: MWP1080W27V50K[D,B,W][Blank,P0]D[Blank,A-Z,a-z,0-9] Product ID: PXLO6URK	Premium

**WFM SERIES FULL CUTOFF WALL PACK TILT-ABLE**

**SENSOR SPEC**

Model	Type	Mounting	Coverage	Input	Function	Programmable
SENSOR-PH-PB-U	-	-	-	Universal	Dusk-to-Dawn Control	-



SENSOR-PH-PB-U