

PLEASE READ AND FOLLOW ALL SAFETY INSTRUCTIONS

SAVE THIS SHEET

To Avoid Risk of Electric Shock and Injury

- Never attempt any work on the luminaire unless it is disconnected from the power source.
- Any Installation and service of the luminaire should be done by a certified electrician.
- Confirm the supply voltage matches the voltage labeled on the luminaire.
- Make sure all electrical and grounded connections are in accordance with the National Electric Code (NEC) and any local codes.
- Make sure all connections are capped with UL-listed wire connectors.
- Allow luminaire to cool down before handling. Never handle luminaire when it is in use.
- Do not exceed the maximum wattage labeled on luminaire.
- Always wear gloves and safety glasses when installing, handling, or performing routine maintenance on the luminaire.
- Do not look directly at the light source when luminaire is on.

To Avoid Risk of Fire and Product Damage

- Keep any combustible material away from the luminaire.
- Do not operate luminaire near any persons, materials, or substances that are sensitive to heat.
- When mounting, make sure wiring is secured from any edges or objects that can damage the wire insulation.
- Do not obstruct ventilation of the luminaire. Do not cover the luminaire with foam or other insulation material that will restrict convection or conduction cooling.
- Only use luminaire at its intended location.
- LED fixtures are sensitive to polarity. Make sure to identify proper polarity before installing.
- Electrostatic Discharge (or ESD) can damage LED luminaire. Make sure to always wear personal grounding equipment when installing or servicing the luminaire.
- Avoid touching individual electrical components, which can cause ESD and will reduce the life and performance of the luminaire.
- Do not power luminaire on and off frequently as this will greatly reduce luminaire's lifespan.
- Always read the luminaire's complete installation instruction sheet before installing luminaire.
- Always inspect the luminaire for damage. DO NOT INSTALL fixture if there is any damage. Contact your distributor or representative where you purchased the luminaire for warranty claim if luminaire is damaged.

To Maintain Luminaire and Ensure Consistent Performance

- **IMPORTANT: Always make sure luminaire is disconnected from power source when performing routine maintenance.**
- Occasionally clean luminaire lens. When cleaning lens, you may dust with soft, dry and clean cloth. You may also use solution of warm water and non-abrasive cleaning agent then wipe with dry cloth. DO NOT USE alkaline or acid cleaners.
- Keep heatsink clear of dust or debris from time to time.
- Maintaining the luminaire on a routine basis is highly recommended.

Failure to follow any of these instructions may void warranty.

Please visit www.alslighting.us to view complete product Terms and Conditions.

Advantage Lighting Solutions assumes no responsibility for claims arising from improper or careless installation or handling of its products.


Important Safety Instructions

1. Make sure power is turned OFF before installing.
2. Inspect fixture for any damages. If damaged, DO NOT install fixture and contact local ALS distributor immediately.


Installation Instructions

Area Light


Step 1: Unscrew the screw on the top surface of the fixture as shown in the figure. Then remove the Cable Outlet Plug on the top surface of the fixture.

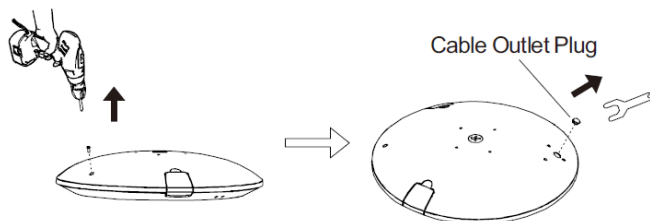


Step 2: Release the two clips on the top of the fixture, then lift the top cover of the fixture upward. **(The opening position of the top cover aligns with the light emission direction.)**

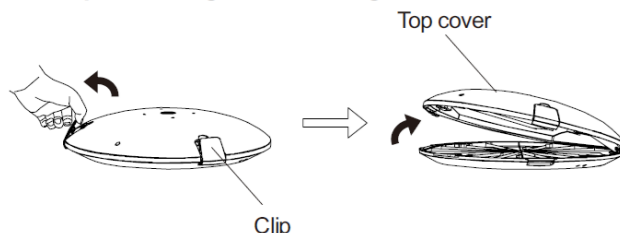


Step 3: Slide the Cable Gland and Silicone Plug over the fixture's power cable, thread the cable through the cable outlet as shown in the figure, and finally secure the Cable Gland to the outlet with two screws.

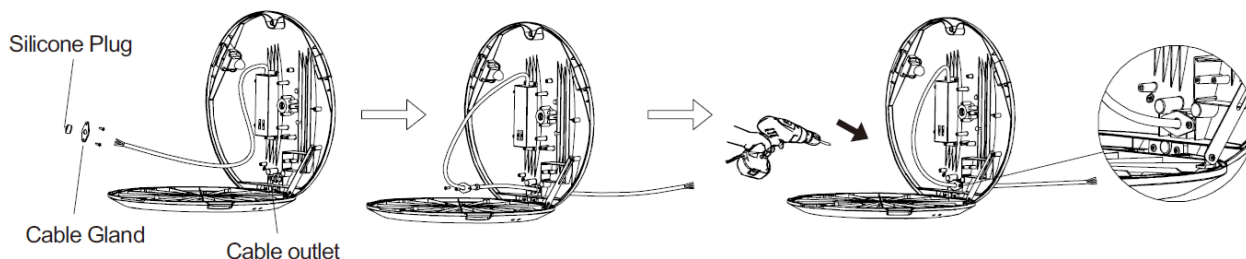


Step 4: Close the top cover of the fixture, fasten the clips on the top surface of the fixture, and tighten the screw on the top surface of the fixture as shown in the figure.

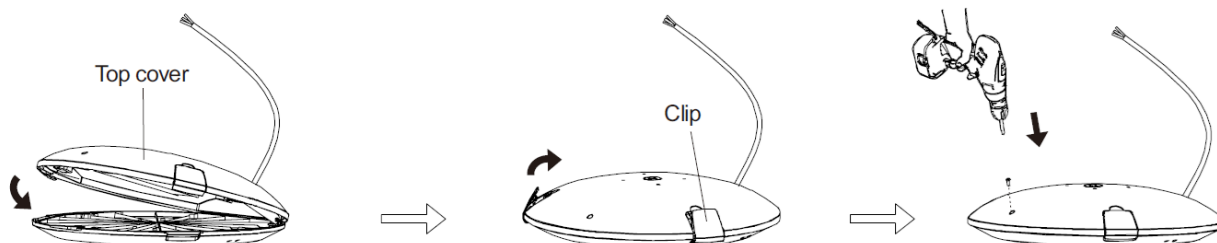


Step 5: Pull the fixture's power cable through the Bracket-to-Fixture Connector, then secure the Connector to the top surface of the fixture with three screws.

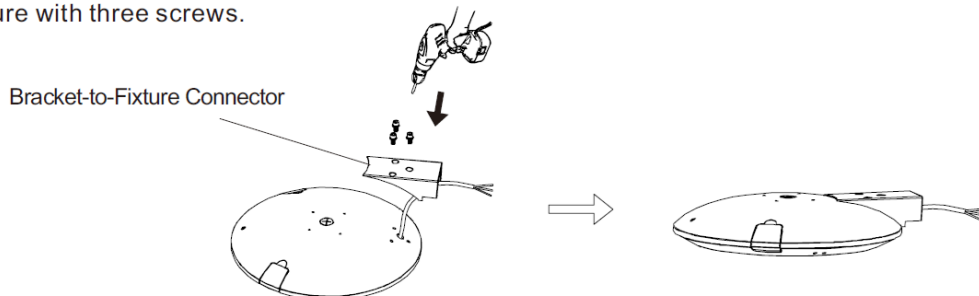


Step 6: Unscrew the screws of the iron bar with a screwdriver, adjust the hole spacing of the iron bar in advance according to the hole position on the Square or Round Pole. Remove the junction box cover of the Pole Mount Arm.

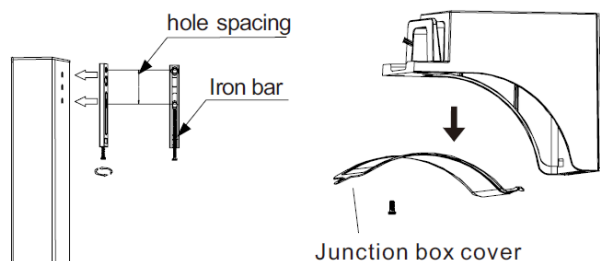


Step 7: Fix the iron bar to the inside of the light pole with screws (Note: the screw is only screwed into 1/3 of its length), and lead out the input cable.

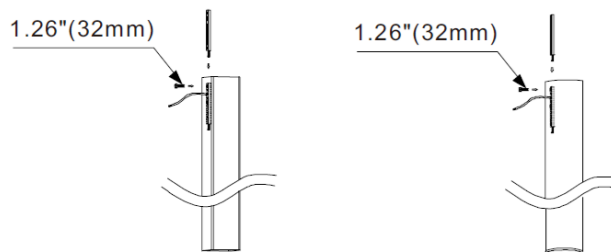





Step 8: Pull the rubber gasket and the Pole Mount Arm through the screw and input cable on the light pole. Tighten the screw and then lock the other screw.

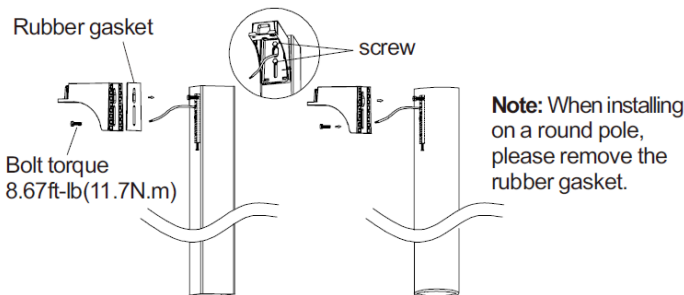


Step 9: Pull the fixture's power cable through the Pole Mount Arm, place the fixture onto the Arm, and then tighten the two screws.

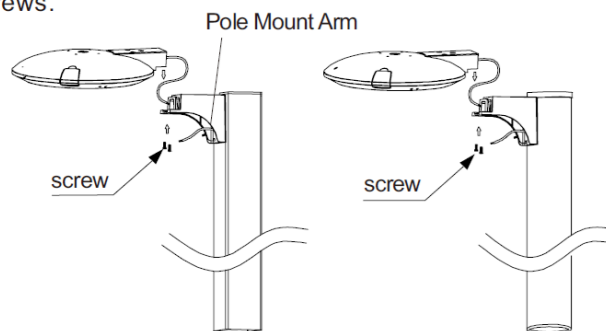

Step 10: Pull the fixture's power cable out from the access panel of the Pole Mount Arm for wiring; or pull the cable through the wiring hole into the pole and make connections inside. Then secure the junction box cover by tightening the screws, or close the pole's Top Cover. The installation is then complete.

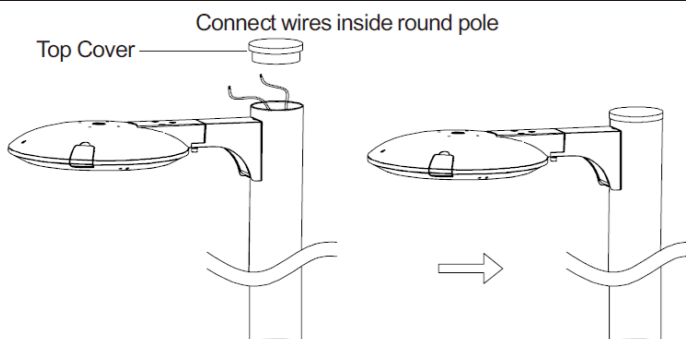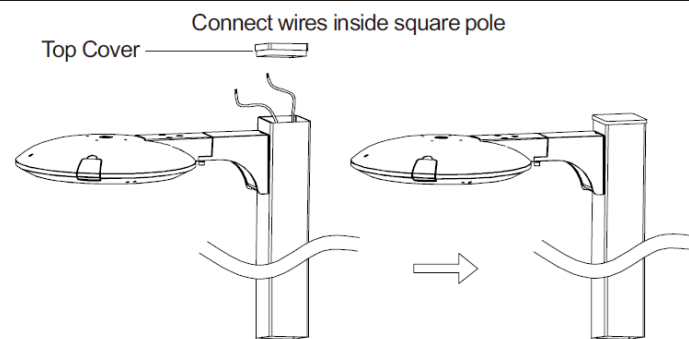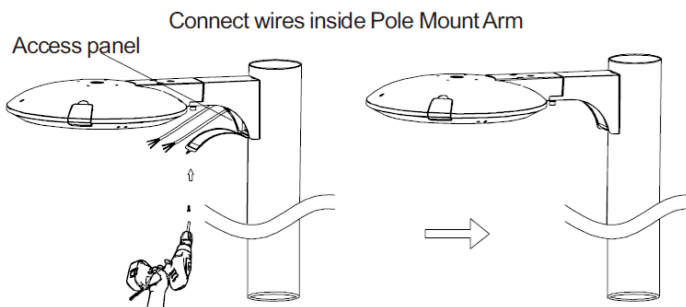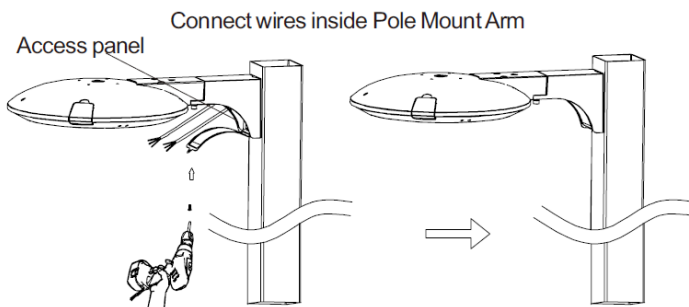

Wattage & CCT Selectable

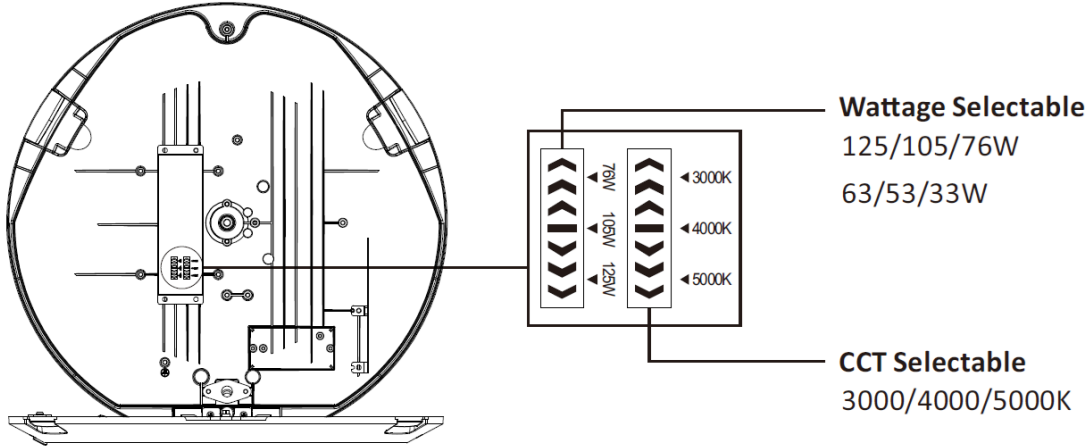

Wiring Diagram

