



## CONTRACTOR SERIES AREA LIGHT

Client:  
Project:  
Type:  
Quantity:

### CONSTRUCTION

Rugged die-cast aluminum housing with hinged, die-cast aluminum door.  
Low-profile housing with enhanced thermal heat sink.

### OPTICS

UV-resistant polycarbonate optics, available in Type III distributions.  
Optics is precisely designed to shape the distribution, maximizing efficiency and application spacing.

### ELECTRICAL

70+ CRI Lumileds LED.  
-20°C up to 50°C (-4°F up to 122°F) maximum operating temperature.  
Long-life 50,000 hr LED at L70 @ 25°C.  
Driver operates at 120-277V input, 0-10V dimmable driver, down to 10%.  
50/60Hz, <75% THD, 0.9 power factor.

### MOUNTING

Adjustable square / round pole mount bracket (SRT).  
Optional adjustable slipfitter (SF) for 2-3/8" tenon.  
Optional yoke mount bracket (YM) for surface mount.

### STANDARD FINISH

Dark Bronze powder coating finish.

### CERTIFICATION

IP65 Wet location label standard.  
Title 24 compliant; see local ordinance for qualification information.  
All luminaires are built to UL1598 standards and bear appropriate cULus labels.  
DLC® Premium (DesignLights Consortium Qualified).

### WARRANTY

5 year warranty, see Limited Warranty for additional information.



w/Slipfitter Mount



Top View



CCT / Output Selector

### SHIPPING DATA

Product	Measurement	Weight
CSA-100	26"L x 13"W x 6"H	11 lb
CSA-150	31"L x 15"W x 6"H	15 lb
CSA-240	31"L x 15"W x 6"H	15 lb
CSA-300	37"L x 19"W x 7"H	27 lb
CSA-480	37"L x 19"W x 7"H	28 lb



**CONTRACTOR SERIES AREA LIGHT**

ORDER INFORMATION				EXAMPLE: CSA 150 SC T3 DB UD		
Fixture	Series	Power & LM	CCT	Distribution	Finish	Input
	<b>CSA</b>		<b>SC</b>		<b>DB</b>	<b>UD</b>
Mounting						

**A SERIES**

**CSA** Contractor Series - Area Light

**B POWER & LM**

Code	Field Selectable Power	Lumen
<b>100</b>	40W / 60W / 80W / 100W	6,000 / 9,000 / 12,000 / 15,000
<b>150</b>	80W / 100W / 120W / 150W	12,000 / 15,000 / 18,000 / 22,500
<b>240</b>	150W / 180W / 200W / 240W	22,500 / 27,000 / 30,000 / 36,000
<b>300</b>	150W / 200W / 240W / 300W	22,500 / 30,000 / 36,000 / 45,000
<b>480</b>	240W / 300W / 400W / 480W	36,000 / 45,000 / 60,000 / 72,000

**C CCT**

**SC** Field Selectable CCT: 3000K / 4000K / 5000K

**D DISTRIBUTION**

**T3** Type III

**E FINISH**

**DB** Dark Bronze

**F INPUT**

**UD** 120-277V, 0-10V Dimming


**G MOUNTING**

- MOUNT-CSA-SF** Adjustable Slipfitter Bracket for 2-3/8" Tenon
- MOUNT-CSA-SRT** Tilttable Square and Round Pole Bracket
- MOUNT-CSA-YM** Adjustable Yoke Mount Bracket

**CONTRACTOR SERIES AREA LIGHT**

**DIMENSIONS**

Model	L	W	H
CSA-100	22.95" (583mm)	10.31" (262mm)	2.83" (72mm)
CSA-150	22.95" (583mm)	10.31" (262mm)	2.83" (72mm)
CSA-240	27.40" (696mm)	12.99" (330mm)	2.87" (74mm)
CSA-300	27.40" (696mm)	12.99" (330mm)	2.87" (74mm)
CSA-480	33.00" (838mm)	15.28" (388mm)	3.23" (83mm)

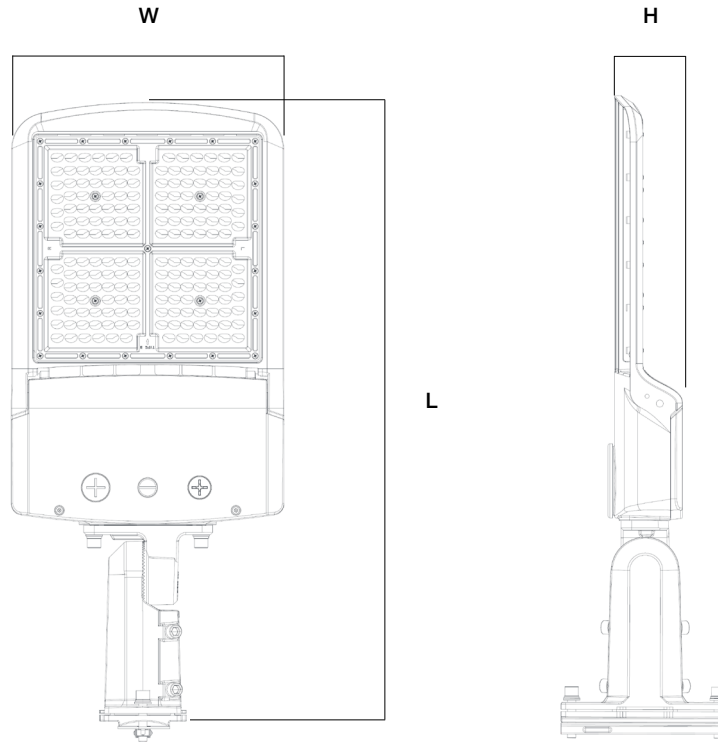

**EPA (ft<sup>2</sup>)**

Mounting Option	Single	2 @ 90°	2 @ 120°	2 @ 180°	3 @ 90°	3 @ 120°	4 @ 90°
100W / 150W	0.3632	0.6849	0.8861	0.7264	1.0481	1.2078	1.0481
240W / 300W	0.4758	0.8091	1.059	0.9516	1.2849	1.3923	1.2849
480W	0.5614	0.8471	1.105	1.1228	1.294	1.2503	1.294