

PTDA SERIES DECORATIVE POST TOP

Client:
 Project:
 Type:
 Quantity:

CONSTRUCTION

Decorative design with heavy grade A360 cast aluminum (aluminum with <1% copper). Incorporate a hidden hinge door allowing the door to swing open and remain open.

EPA: 2.29

OPTICS

Polycarbonate lens offers smooth distribution with Type V pattern.

ELECTRICAL

80+ CRI Lumileds available for 5000K CCT.
 Output & CCT Selectable model - see Ordering Information.
 -40°C up to 45°C* (-40°F up to 113°F) maximum operating temperature.
 L70 @ 105C > 60,000hrs | L70 @ 40C >200,000hrs.
 50/60Hz, <20% THD, 0.9 power factor.
 Driver operates at 120-277V input, 0-10V dimmable driver.
 Optional 10kV surge protection.

SENSOR (OPTIONAL)

SENSOR-PH-PB-U Integral button style photocell.

MOUNTING

Self-aligning pole-top fitter fits 2-3/8" ~ 3" O.D. pole tops or vertical tenons.
 Optional 4" and 5" tenon adapter.

STANDARD FINISH

Corrosion resistant Black powder coating finish.

CUSTOM FINISH

Corrosion resistant Dark Bronze, Graphite Metallic, Gray, Silver, White, Custom RAL#.

CERTIFICATION

IP65 Wet location label standard.
 Meets Buy America Act requirements.
 All luminaires are built to UL1598 standards and bear appropriate cETLus labels.
 DLC® (DesignLights Consortium Qualified).

WARRANTY

5 year warranty, see Limited Warranty for additional information.



SHIPPING DATA

Product	Measurement	Weight
PTDA	18"L x 18"W x 38"H	28 lb



PTDA SERIES DECORATIVE POST TOP

ORDER INFORMATION				EXAMPLE : PTDA 60 SC T5 SF3 BK UD			
Fixture	Series	Power & LM	CCT	Distribution	Mounting	Finish	Input
	PTDA	60	SC	T5	SF3	BK	UNVD
Accessories							
Options							

A SERIES

PTDA Decorative Acorn Post Top

B POWER & LM

Code	Power	LM
60	Selectable 30 / 50 / 60W	3,600 ~ 6,600

C CCT

SC Selectable 3000 / 4000 / 5000K

D DISTRIBUTION

T5 Type V Distribution

E MOUNTING

SF3 Self-aligning pole-top fitter fits 2-3/8" ~ 3" O.D.

F FINISH

Standard	
BK	Black

G INPUT

UD 120-277V, 1-10V Dimmable

H ACCESSORIES/OPTIONS


AIA	Assembled in America, compliant with BAA (COTS)
SENSOR-PH-PB-U*	Button Style Photocell
MOUNT-4SQR-SP-D	4" Tenon Adapter for Round Pole
MOUNT-5SQR-SP-D	5" Tenon Adapter for Round Pole
MOUNT-4SQ-SP-D	4" Tenon Adapter for Square Pole
MOUNT-5SQ-SP-D	5" Tenon Adapter for Square Pole
SURGE-LSP4-U	10kV inline Surge Protection for Universal input / U: 120-277V

*see page 4 for sensor spec

PTDA SERIES DECORATIVE POST TOP

DIMENSIONS

Model	H1	H2	W1	W2
PTL-30 / 60 / 120	40.70" (1034mm)	11.60" (295mm)	17.70" (450mm)	ø 3.15" I.D. (80mm)

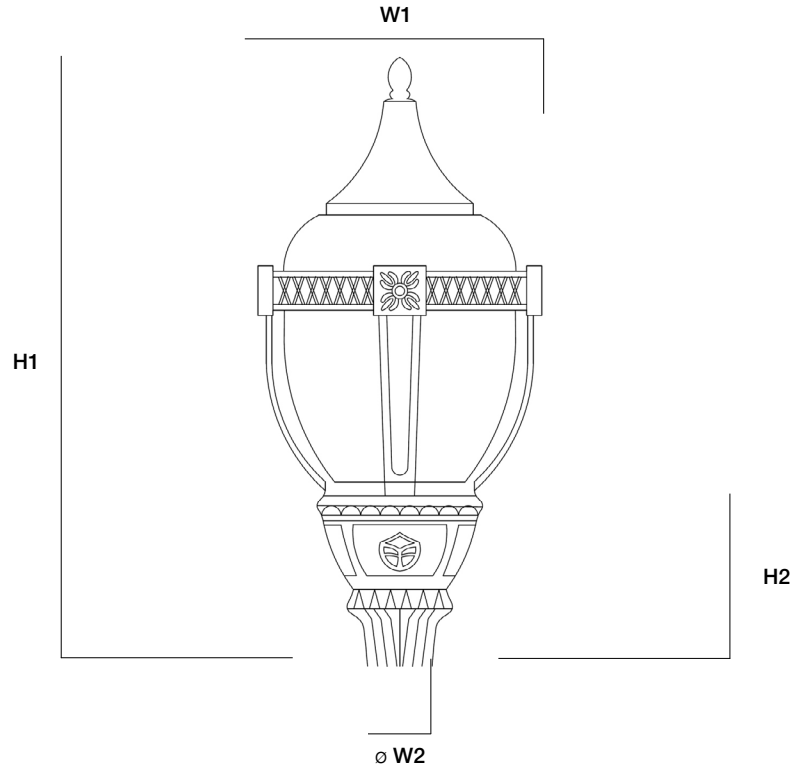

PTDA SERIES DECORATIVE POST TOP

PERFORMANCE DATA

SYSTEM WATTS	VOLTAGE	DIST. TYPE	3000K		4000K / 5000K	
			LUMENS	LPW	LUMENS	LPW
30W	120-277V	V	3,300	110	3,390	113
50W	120-277V	V	5,500	110	5,650	113
60W	120-277V	V	6,600	110	6,780	113

SENSOR SPEC

Model	Type	Mounting	Coverage	Input	Function	Programmable
SENSOR-PH-PB-U	-	-	-	Universal	Dusk-to-Dawn Control	-



SENSOR-PH-PB-U