

CONTROL-LVFA BLUETOOTH CONTROLLER

Client: _____
Project: _____
Type: _____
Quantity: _____

Status LEDs & Config Button


Quick and easy validation of wiring and network

Direct Connect™ Sensor Port

Simple and cost-effective addition to Avi-on sensors

Terminal Blocks & Mounting Tabs

Faster, easier and lower cost installation eliminating connectors

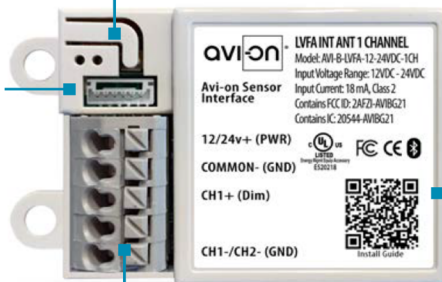

Internal Antenna

Improved performance and eliminates risk of accidentally cutting a hanging wire


SPECIFICATIONS

INPUT VOLTAGE: 12-24VDC
CURRENT: 15mA without a Sensor
19mA with a DC PIR Sensor
48mA with a DC Microwave Sensor
0-10V DIMMING: 12-24VDC
SIZE: 2.30in x 1.43in x 0.75in
(58.2mm x 36.4mm x 19mm)
MOUNTING: Removable mounting tabs
WEIGHT: 0.45 oz (16g)
OPERATING TEMP: -22°F to +158°F (-30°C to + 70°C)


RADIO FREQUENCY: 2.4GHz
WIRELESS STANDARD: BLE 4.2 with Mesh
POINT TO POINT RANGE*: 80ft with obstructions
350ft unobstructed
SECURITY: AES 128-bit encryption for device to device communication
AES 256-bit encryption for device to cloud communication
WARRANTY: 5 years; 10 years optional
REGULATORY: FCC: 2AFZ1-AV1010 B
IC: 20544-AV1010 B
BQB: D031801, DID: 86303
UL 916, 2043 (Plenum Rated)

*When communicating through the mesh, range is essentially unlimited (5000ft+)

WIRING DIAGRAM

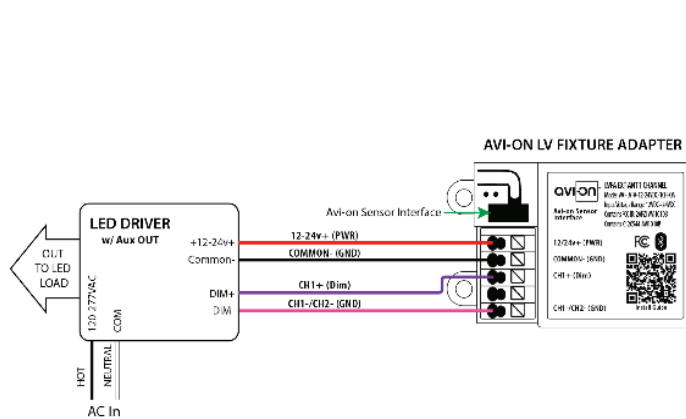

Fixture adapter powered by LED driver auxiliary output

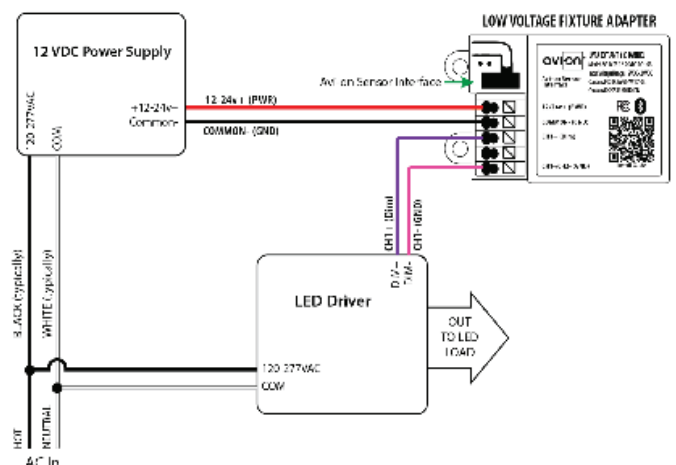

Fixture adapter connected to LED driver and using power supply



CONTROL-LVFA BLUETOOTH CONTROLLER

Client:

Project:

Type:

Quantity:

ORDER INFORMATION		EXAMPLE: CONTROL-LVFA-1CH
Part	Option	
CONTROL-LVFA-1CH		

A	PART	
	CONTROL-LVFA-1CH	AVI-ON Bluetooth Mesh Control System
	CONTROL-LVFA-1CH-OA	AVI-ON Bluetooth Mesh Control System with External Antenna