

WFM SERIES FULL CUTOFF WALL PACK TILT-ABLE

Client:
 Project:
 Type:
 Quantity:

CONSTRUCTION

Low profile architectural style wall pack, sleek and modern design, die-cast aluminum housing provides excellent thermal management.
 Suitable for applications requiring 3G testing prescribed by ANSI C136.31.

OPTICS

Individual acrylic LED optics provide IES Type III distribution.
 Light engines available between 4000K, 5000K (70+ CRI)
 Selectable CCT light engine available between 3000K~5000K (70+ CRI).

ELECTRICAL

70+ CRI Lumileds LED.
 -40°C up to 40°C (-40°F up to 104°F) maximum operating temperature.
 >54,000 hr LED at L70.
 Driver operates at 120-277V input, 50/60Hz, <20% THD, 0.9 power factor, 1-10V dimmable.
 Optional 10kV surge protection.

MOUNTING

Wall mount over electrical box or via surface conduit.
 0° to +90° tilt adjustment.

STANDARD FINISH

Corrosion resistant Dark Bronze powder coating finish.

CERTIFICATION

Wet Location Listed.
 Meets Buy America Act requirements.
 All luminaires are built to UL1598 standards and bear appropriate cULus labels.
 DLC® Premium (DesignLights Consortium Qualified) listed.

WARRANTY

5 year warranty, see Limited Warranty for additional information.



SHIPPING DATA

Product	Measurement	Weight
WFM-40	10"L x 8"W x 5"H	4 lb
WFM-67	12"L x 11"W x 6"H	8 lb
WFM-80	12"L x 11"W x 6"H	8 lb
WFMA-40	10"L x 8"W x 5"H	4 lb
WFMA-80	12"L x 11"W x 6"H	8 lb



WFM SERIES FULL CUTOFF WALL PACK TILT-ABLE

ORDER INFORMATION				EXAMPLE: WFM 27 50 T3 DB U	
Fixture	Series	Power & LM	CCT	Finish	Input
	WFM			DB	U
Accessories Options					
A	SERIES				
	WFM	Full Cutoff Wall Pack Tilt-able			
B	POWER & LM				
	Code	Power	Lumen	LM/W	
	40	40W	5200lm	130	
	67	67W	8800lm	131	
	80	80W	10500lm	131	
C	CCT				
	40	4000K			
	50	5000K			
D	FINISH				
	DB	Dark Bronze			
E	INPUT				
	U	120-277V			
F	ACCESSORIES/OPTIONS				
	AIA	Assembled in America, compliant with BAA (COTS)			
	SURGE-LSP4-U	10kV inline Surge Protection for Universal input U : 120-277V			

*see page 5 for sensor spec

WFM SERIES FULL CUTOFF WALL PACK TILT-ABLE

ORDER INFORMATION				EXAMPLE: WFMA 80 SC T3 DB U P		
Fixture	Series	Power & LM	CCT	Finish	Input	Photocell
	WFMA		SC	DB	U	P
Accessories Options						
A	SERIES					
	WFMA	Selectable Full Cutoff Wall Pack Tilt-able				
B	POWER & LM					
	Code	Power	Lumen		LM/W	
	40	Field Selectable 16W / 24W / 32W / 40W	2800lm / 3950lm / 5100lm / 6200lm		164 (avg.)	
	80	Field Selectable 32W / 48W / 64W / 80W	5400lm / 7800lm / 10100lm / 12200lm		161 (avg.)	
C	CCT					
	SC	Field Selectable 3000K ~ 5000K				
D	FINISH					
	DB	Dark Bronze				
E	INPUT & CONTROL					
	U-P	120-277V, w/Built-in Photocell				
F	ACCESSORIES/OPTIONS					
	AIA	Assembled in America, compliant with BAA (COTS)				
	SURGE-LSP4-U	10kV inline Surge Protection for Universal input / U: 120-277V				


*see page 5 for sensor spec

WFM SERIES FULL CUTOFF WALL PACK TILT-ABLE


DIMENSIONS

Model	L	W	D
WFM-40			
WFMA-40	9.31" (232mm)	7.29" (185mm)	4.20" (107mm)
WFM-67 / 80			
WFMA-80	11.02" (280mm)	10.06" (256mm)	5.09" (129mm)


Front

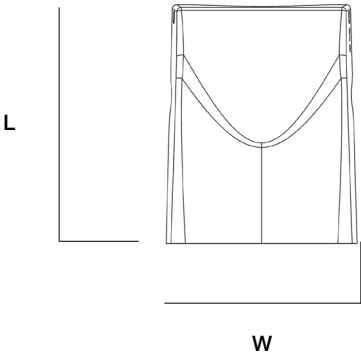

Side



Bottom



WFM SERIES FULL CUTOFF WALL PACK TILT-ABLE

PERFORMANCE DATA

SYSTEM WATTS	VOLTAGE	3000K		4000K		5000K	
		LUMENS	LPW	LUMENS	LPW	LUMENS	LPW
WFM-40	120-277V	-	-	5,200	130	5,200	130
WFM-67	120-277V	-	-	8,800	131	8,800	131
WFM-80	120-277V	-	-	10,500	131	10,500	131
WFMA-40 @ 16W	120-277V	2,600	163	2,800	175	2,650	166
WFMA-40 @ 24W	120-277V	3,700	154	3,950	165	3,800	158
WFMA-40 @ 32W	120-277V	4,700	147	5,100	159	4,800	150
WFMA-40 @ 40W	120-277V	5,600	140	6,200	155	5,800	145
WFMA-80 @ 32W	120-277V	5,050	158	5,400	169	5,200	163
WFMA-80 @ 48W	120-277V	7,300	152	7,800	163	7,500	156
WFMA-80 @ 64W	120-277V	9,300	145	10,100	158	9,600	150
WFMA-80 @ 80W	120-277V	11,200	140	12,200	153	11,500	144

DLC CODE

Part Number	DLC Part Number	DLC Class
WFM - 40 - 40 - T3 - DB - U	OEM DLC: MWP1040W27V40K[D,B,W][Blank,P0]D[Blank,A-Z,a-z,0-9] Product ID: P73Z2I7B	Premium
WFM - 40 - 50 - T3 - DB - U	OEM DLC: MWP1040W27V50K[D,B,W][Blank,P0]D[Blank,A-Z,a-z,0-9] Product ID: PZD2MHF	Premium
WFM - 67 - 40 - T3 - DB - U	OEM DLC: MWP1067W27V40K[D,B,W][Blank,P0]D[Blank,A-Z,a-z,0-9] Product ID: PB5BM14J	Premium
WFM - 67 - 50 - T3 - DB - U	OEM DLC: MWP1067W27V50K[D,B,W][Blank,P0]D[Blank,A-Z,a-z,0-9] Product ID: PUCVFQDV	Premium
WFM - 80 - 40 - T3 - DB - U	OEM DLC: MWP1080W27V40K[D,B,W][Blank,P0]D[Blank,A-Z,a-z,0-9] Product ID: PRSMLEOE	Premium
WFM - 80 - 50 - T3 - DB - U	OEM DLC: MWP1080W27V50K[D,B,W][Blank,P0]D[Blank,A-Z,a-z,0-9] Product ID: PXLO6URK	Premium