

## LPA-SM SERIES SURFACE MOUNT EDGELIT PANEL

Client:  
Project:  
Type:  
Quantity:

### CONSTRUCTION

Low profile extruded aluminum frame, 0.68" thickness, all corners are rounded for safe handling. Designed for Surface Mount or Recessed application. The backplate includes integral T-bar clips for installation into T-grid ceilings.

### OPTICS

Edgelit design provides exceptional lighting distribution. Frosted PMMA lens offers edge to edge illumination without pixilation or bright spots.

### ELECTRICAL

80CRI Long-life, high-efficacy, micro-power LEDs, illumination for extended service life. Greater than 70% LED lumen maintenance at 100,000 hours (L70>100,000). Selectable lumen and CCT technology allows easy field-adjustable capability, luminaire ships with maximum output and 4000K CCT setting. All CCTs are within 3 MacAdam ellipses. Driver operates at 120-277V input, 0-10V dimmable driver.

### MOUNTING

Designed for surface mount application. Suitable for lay-in ceilings, Slot T, and T-bar suspension system for 5/8" and 3/8" width. Built-in earthquake clips come standard on mounting bracket.

### STANDARD FINISH


90% minimum average reflective white polyester powder coat bonded to phosphate-free, multi-stage pretreated metal. All parts painted after fabrication to facilitate installation, increase efficiency, and inhibit corrosion.

### CERTIFICATION


Option for "Assembled in America" upon request.  
IC Rated, suitable for Damp location.  
All luminaires are built to UL1598 standards and bear appropriate cULus labels.  
For Emergency application, equipment with UL924 certified battery packs.  
DLC<sup>®</sup> Standard (DesignLights Consortium Listed)

### WARRANTY

5 year warranty, see Limited Warranty for additional information.



Front



Back



Earthquake Clip



## LPA-SM SERIES SURFACE MOUNT EDGELIT PANEL


ORDER INFORMATION					EXAMPLE: LPA-SM 4 EDGELIT
Fixture	Series	Model	Finish	Input	
	LPA-SM		blank	blank	
Mounting	blank				
Accessories Options					
A	SERIES				
	LPA-SM	Surface Mount Selectable Lumen and CCT Panel			
B	MODEL				
	Code	Size	Power	CCT	lm/W (avg.)
	1-EDGELIT	1x4	20W / 30W / 40W	3000K / 3500K / 4000K	133lm/W
	2-EDGELIT	2x2	20W / 30W / 40W	3000K / 3500K / 4000K	124lm/W
	4-EDGELIT	2x4	30W / 40W / 50W	3000K / 3500K / 4000K	139lm/W
C	FINISH				
	blank	White			
D	INPUT				
	blank	120-277V, 0-10V Dimming			
E	MOUNTING				
	blank	Surface Mount Bracket included			
F	ACCESSORIES/OPTIONS				
	AIA	Assembled in America, compliant with BAA (COTS)			
	EMB-H08170*	120-347V Input External EMB 8W 170VDC Output			
	EMB-H18170*	120-347V Input External EMB 18W 170VDC Output			

\*see page 5 for EMB spec

LPA-SM SERIES SURFACE MOUNT EDGELIT PANEL

DIMENSIONS

Model	L	W	D
LPA-SM-1-EDGELIT	47.70" (1212mm)	11.70" (291mm)	0.68" (17mm)
LPA-SM-2-EDGELIT	23.70" (602mm)	23.70" (602mm)	0.68" (17mm)
LPA-SM-4-EDGELIT	47.70" (1212mm)	23.70" (602mm)	0.68" (17mm)

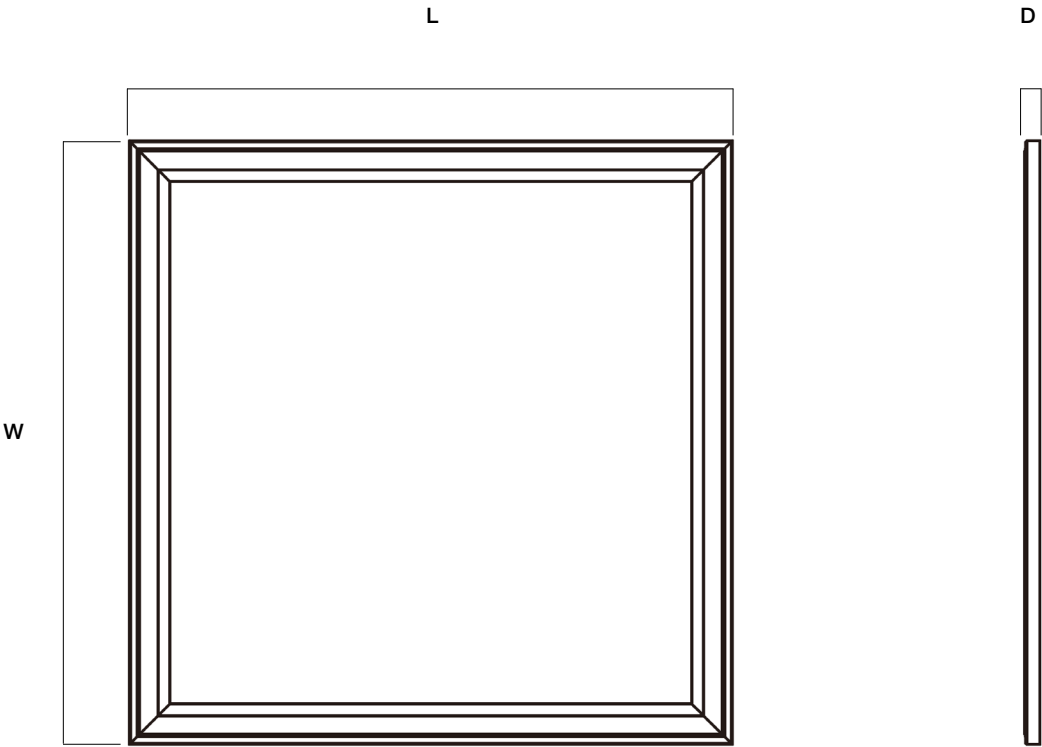

## LPA-SM SERIES SURFACE MOUNT EDGELIT PANEL

### PERFORMANCE DATA

SYSTEM WATTS	SIZE	VOLTAGE	LUMEN	LPW
20W	LPA-SM-1-EDGELIT	120-277V	3023	137
	LPA-SM-2-EDGELIT	120-277V	2698	131
30W	LPA-SM-1-EDGELIT	120-277V	3933	134
	LPA-SM-2-EDGELIT	120-277V	3769	122
40W	LPA-SM-1-EDGELIT	120-277V	5245	128
	LPA-SM-2-EDGELIT	120-277V	4988	121
30W	LPA-SM-4-EDGELIT	120-277V	4210	140
40W	LPA-SM-4-EDGELIT	120-277V	5230	141
50W	LPA-SM-4-EDGELIT	120-277V	6625	136

## LPA-SM SERIES SURFACE MOUNT EDGELIT PANEL

### EMB SPEC

Model	Battery Capacity	Input	Output	Output Power	Operating Temp	Installation
EMB-H08170	90mins	100-347VAC	170VDC	8W	0°C ~ 50°C 32°F ~ 122°F	Factory or Field Install
EMB-H18170	90mins	100-347VAC	170VDC	18W	0°C ~ 50°C 32°F ~ 122°F	Factory or Field Install

