

LW4A SERIES SELECTABLE WRAP STRIP

Client:
Project:
Type:
Quantity:

CONSTRUCTION

4-Foot 22-gauge steel with semi-gloss White finish.
1/2" knockout made on end cap for sensor or surface conduit mount.



OPTICS

End-to-end wrap around frosted prismatic polycarbonate (PC) lens.

ELECTRICAL

Delivered 130lm/W efficacy LEDs offer 80+ color rendering index (CRI), L70 >50,000 hours expected life.
-10°C up to 50°C (14°F up to 122°F) maximum operating temperature.
Selectable lumen and CCT technology allows easy field-adjustable capability.
Luminaire ships with maximum output and 4000K CCT setting.
Driver operates at 120-277V input, 0-10V dimmable driver, dimmable down to 10%.

SENSORS (OPTIONAL)

SENSOR-819-O1 End mount on/off motion sensor with lowbay lens.
SENSOR-819-D1 End mount on/off/dimming and photocell sensor with lowbay lens.
SENSOR-BLE-819 End mount ALS CONTROL bluetooth on/off motion sensor lowbay lens.
SENSOR-BLE-7 Integral Microwave Bluetooth Wireless Motion/on/off/dimming/photosensing.
SENSOR-ANT-7 Integral Mircowave Motion/on/off/dimming/photosensing.
CONTROL-LVFA AVI-ON Bluetooth Mesh Controller.

MOUNTING

Designed for direct wire or as a portable luminaire with use of power cord.

STANDARD FINISH

Corrosion resistant semi-gloss White finish, suitable for damp location.

CERTIFICATION

Damp location label standard.
Meets Buy America Act requirements.
All luminaires are built to UL1598 standards and bear appropriate cULus labels.
For Emergency application, equipment with UL924 certified battery packs.
DLC® Premium (DesignLights Consortium Qualified).

WARRANTY

5 year warranty, see Limited Warranty for additional information.

SHIPPING DATA

Product	Measurement	Weight
LW4A	50" L x 13" W x 9" H	7 lb



LW4A SERIES SELECTABLE WRAP STRIP


ORDER INFORMATION					EXAMPLE: LW 4A MC WH UD			
Fixture	Series	Size	Finish	Input				
	LW	4A-MC	WH	UD				
Accessories								
Options								
A	SERIES							
LW	Selectable Wrap Strip							
B	SIZE							
Code	Size	Power	CCT					
4A-MC	4-Foot	30W / 35W / 40W	3500K / 4000K / 5000K					
C	FINISH							
WH	White							
D	INPUT							
UD	120-277V, 0-10V Dimmable							
E	ACCESSORIES/OPTIONS							
AIA	Assembled in America, compliant with BAA (COTS)							
MOUNT-HIBAY-CK	Gripple Hanger Kit							
EMB-8W-B**	90-Minute Self-Diagnostic Emergency Battery 8W 100-347VAC Input 170VDC Output							
SENSOR-819-O1*	End mount on/off motion sensor with lowbay lens							
SENSOR-819-D1*	End mount on/off/dimming and photocell sensor with lowbay lens							
SENSOR-BLE-819-L1*	End Mount PIR Bluetooth Daylight Harvesting Sensor (ALS Control Mobile App) / L1: up to 20FT							
SENSOR-BLE-7*	Integral Microwave Bluetooth Wireless Bi-Level Motion Sensor (ALS Control Mobile App)							
SENSOR-ANT-7*	Integral Microwave Bi-Level Motion Sensor							
CONTROL-LVFA*	AVI-ON Bluetooth Mesh Control System							
SURGE-LSP4-U	10kV inline Surge Protection for Universal input							
REMOTE-RC100	Handheld Remote Commissioning Tool for SENSOR-819-D1/D2 Only, ANT Series							
-CORD	18-3 300V 6 Foot Cord							
-PLUG	18-3 300V 6 Foot and 3 Prong Plug							

*see page 5 for sensor spec

**see page 6 for emb spec

LW4A SERIES SELECTABLE WRAP STRIP**DIMENSIONS**

Model	L	W	H
LW4A-MC	47.60" (1210mm)	7.08" (180mm)	2.90" (74mm)

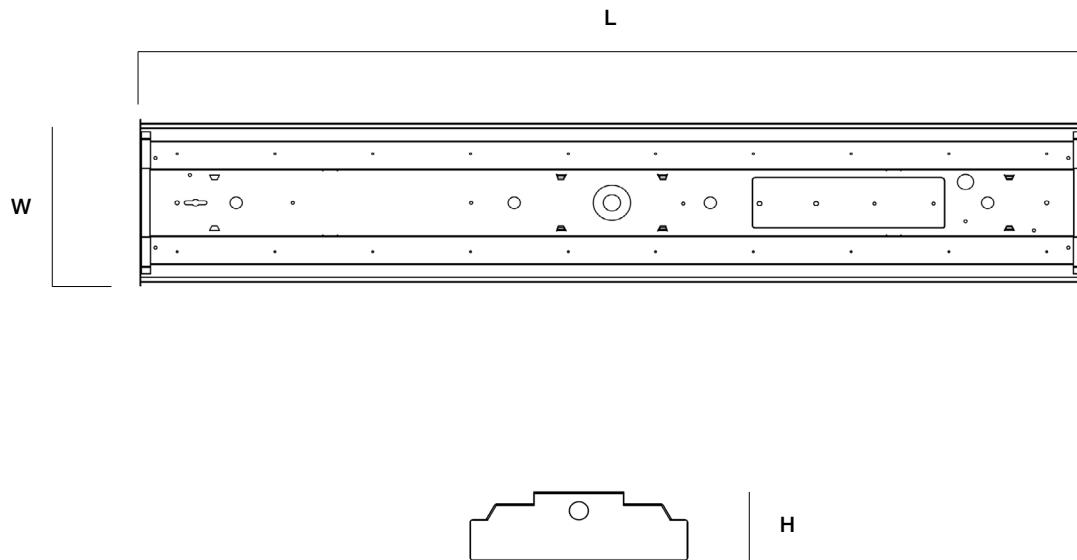



Advantage Lighting Solutions

LW4A SERIES SELECTABLE WRAP STRIP

PERFORMANCE DATA

SYSTEM WATTS	SIZE	VOLTAGE	3500K		4000K		5000K		QTY ON PALLET
			LUMEN	LPW	LUMEN	LPW	LUMEN	LPW	
30W	4-Foot	120-277V	3900	130	3930	131	3960	132	108
35W	4-Foot	120-277V	4550	130	4585	131	4620	132	
40W	4-Foot	120-277V	5200	130	5240	131	5280	132	

LW4A SERIES SELECTABLE WRAP STRIP

SENSOR SPEC						
Model	Type	Mounting	Coverage	Input	Function	Programmable
SENSOR-819-O1	PIR	20FT	30FT radius	Universal	On/Off	-
SENSOR-819-D1	PIR	20FT	30FT radius	Universal	On/Off/Dimming	REMOTE-RC100
SENSOR-BLE-819 (see page 8 for detail)	PIR	L1 - 20FT	30FT radius	Universal	Bluetooth Mesh On/Off/Dimming Daylight Harvesting	ALS Control Bluetooth Mobile App
SENSOR-BLE-7 (see page 9 for detail)	Microwave	up to 13FT	17FT radius	12V DC	Bluetooth Mesh On/Off/Dimming Motion Daylight Sensing	ALS Control Bluetooth Mobile App
SENSOR-ANT-7	Microwave	up to 12FT	17FT radius	10V DC	On/Off/Dimming Motion Daylight Sensing	REMOTE-RC100
CONTROL-LVFA (see page 7 for detail)	Fixture Controller	-	-	12V DC	Bluetooth Mesh On/Off/Dimming Scheduling	AVI-ON Bluetooth Mobile App



SENSOR-819-XX
SENSOR-BLE-819



SENSOR-BLE-7
SENSOR-ANT-7




CONTROL-LVFA

LW4A SERIES SELECTABLE WRAP STRIP


EMB SPEC

Model	Compatible Fixture	Battery Capacity	Input	Output	Output Power	Operating Temp	Installation
EMB-8W-B	LW4A	90mins	100-347VAC	170VDC	8W	0°C ~ 50°C 32°F ~ 122°F	Factory or Field Install

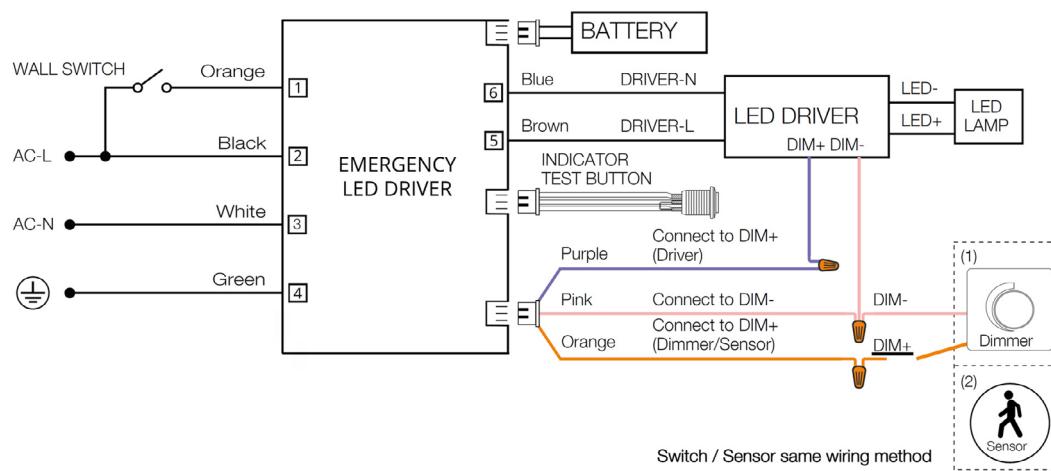

LW4A SERIES SELECTABLE WRAP STRIP

CONTROL-LVFA SPEC

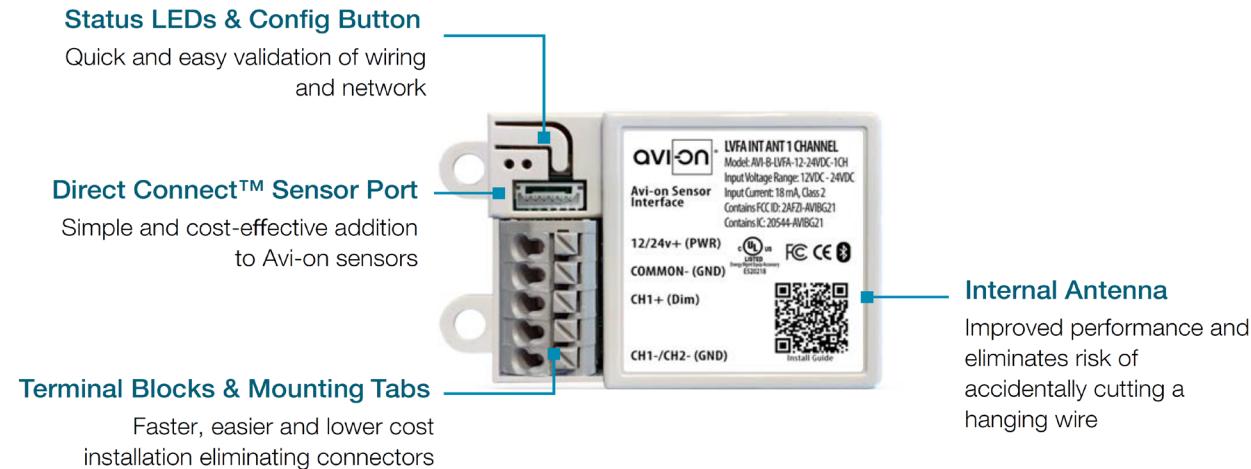



SPECIFICATIONS

INPUT VOLTAGE:	12-24VDC
CURRENT:	15mA without a Sensor
	19mA with a DC PIR Sensor
	48mA with a DC Microwave Sensor
0-10V DIMMING:	12-24VDC
SIZE:	2.30in x 1.43in x 0.75in (58.2mm x 36.4mm x 19mm)
MOUNTING:	Removable mounting tabs
WEIGHT:	0.45 oz (16g)
OPERATING TEMP:	-22°F to +158°F (-30°C to + 70°C)

RADIO FREQUENCY:	2.4GHz
WIRELESS STANDARD:	BLE 4.2 with Mesh
POINT TO POINT RANGE*:	80ft with obstructions 350ft unobstructed
SECURITY:	AES 128-bit encryption for device to device communication AES 256-bit encryption for device to cloud communication
WARRANTY:	5 years; 10 years optional
REGULATORY:	FCC: 2AFZ1-AV11010 B IC: 20544-AV11010 B BQB: D031801, DID: 86303 UL 916, 2043 (Plenum Rated)

*When communicating through the mesh, range is essentially unlimited (5000ft+)

WIRING DIAGRAM

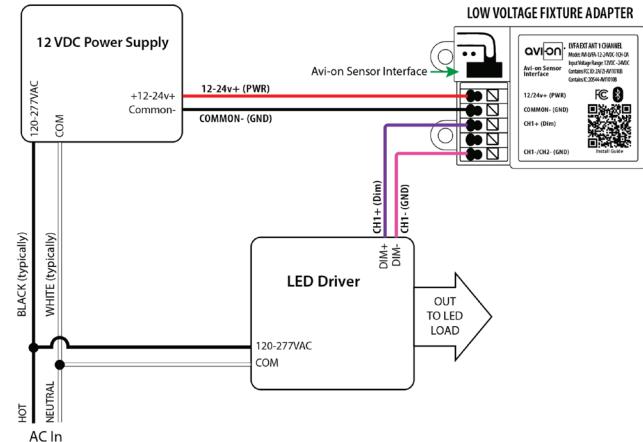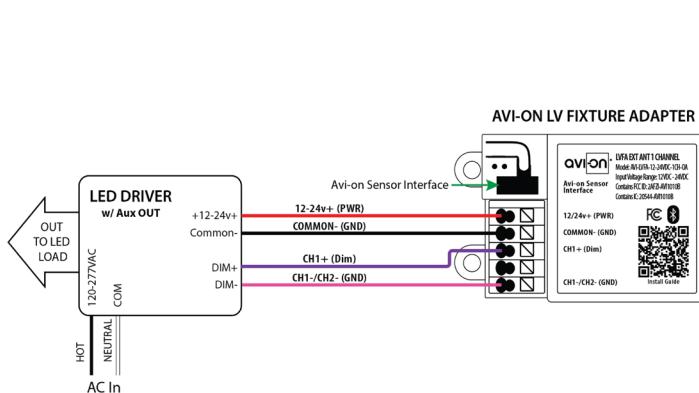

FEATURE

- **Installation:** Factory or Field Install End Mount to Fixture
- **Commissioning:** Wirelessly through ALS Control Mobile App (iOS / Android)
- **Certification:** DLC 5.1 Networked Lighting Control System
- **Control:** Hold time, High-Low setting, continuous Bi-level dimming, Code-compliant manual-on or auto-off capability
- **Sensor:** Motion (Occupancy/Vacancy/Manual) and Daylight Harvesting
- **Room and Zone Control:** Zoning and Grouping control, Scheduling




SPECIFICATIONS

SENSOR TYPE:	Passive Infrared Sensor (PIR)
WIRELESS STANDARDS:	Bluetooth SIG Mesh
INPUT VOLTAGE:	120/277VAC
CONTROL OUTPUT:	0-10V
OPERATING TEMP:	-40°F ~ +167°F (-40°C ~ +75°C)



COMMISSIONING RANGE:	50FT
BLUETOOTH RANGE:	Intergal antenna up to 100FT
DETECTION ANGLE:	Vertical 90° x Horizontal 360°
MOUNTING HEIGHT:	8 - 40FT
WARRANTY:	5 years
IP RATING:	IP20 Damp

DIMENSIONS

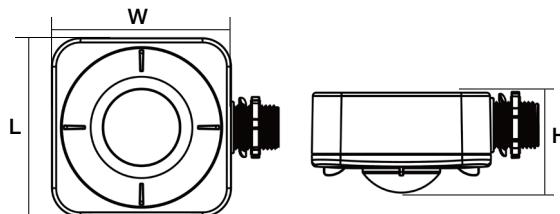

L	W	H
3.19" (81mm)	4.02" (102mm)	1.70" (43.3mm)

COVERAGE PATTERNS

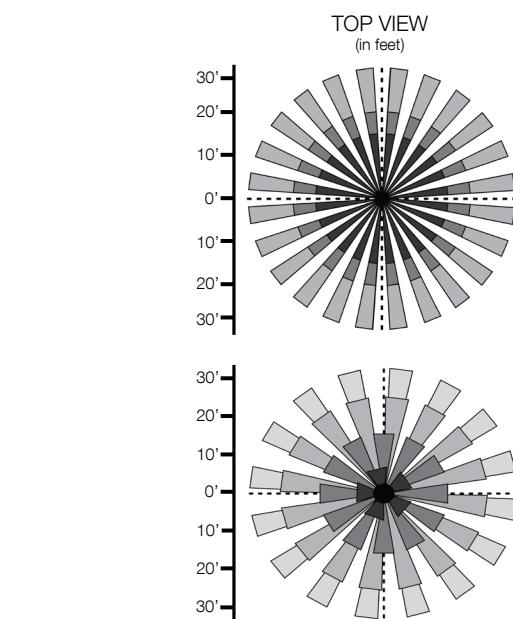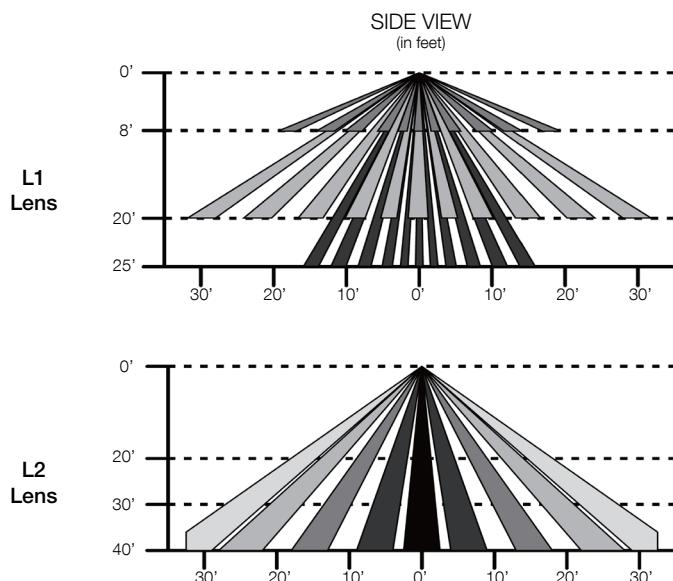

FEATURE

- **Installation:** Factory Install - Integral to Fixture
- **Commissioning:** Wirelessly through ALS Control Mobile App (iOS / Android)
- **Certification:** DLC 5.1 Networked Lighting Control System
- **Control:** Hold time, High-Low setting, continuous Bi-level dimming, Code-compliant manual-on or auto-off capability
- **Sensor:** Motion (Occupancy/Vacancy/Manual)
- **Room and Zone Control:** Zoning and Grouping control, Scheduling



SPECIFICATIONS

SENSOR TYPE: Microwave

WIRELESS STANDARDS: Bluetooth SIG Mesh

INPUT VOLTAGE: 10-14VDC, >50mA

CONTROL OUTPUT: 0-10V

OPERATING TEMP: -40°F ~ +158°F (-40°C ~ +70°C)

COMMISSIONING RANGE: 50FT

BLUETOOTH RANGE: Integral antenna up to 164FT


DETECTION ANGLE: 360°

MOUNTING HEIGHT: Up to 13FT

WARRANTY: 5 years


IP RATING: IP20

DIMENSIONS

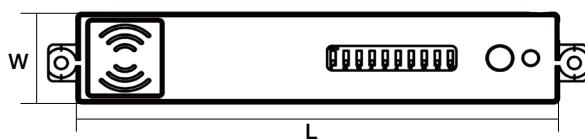


L	W
3.70" (94mm)	0.73" (18.5mm)

COVERAGE PATTERNS

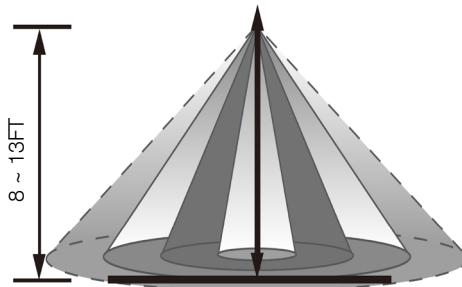

Height of Installation 8 ~13FT

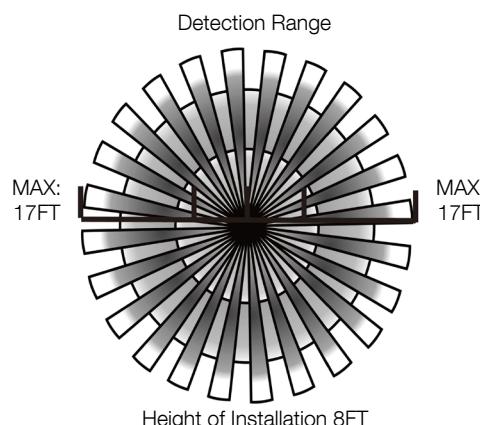

Height of Installation 8FT

