

**LPA-SM SERIES SURFACE MOUNT BACKLIT PANEL**

Client:  
Project:  
Type:  
Quantity:

**CONSTRUCTION**

Low profile extruded aluminum frame, 1.2" thickness, all corners are rounded for safe handling. Designed for Surface Mount application. The backplate includes safety cable for easy installation and added safety feature.

**OPTICS**

Backlit design provides exceptional lighting distribution. Frosted PMMA lens offers edge to edge illumination without pixilation or bright spots.

**ELECTRICAL**

80CRI Long-life, high-efficacy, micro-power LEDs, illumination for extended service life. Greater than 70% LED lumen maintenance at 100,000 hours (L70>100,000). -20°C up to 45°C (-4°F up to 113°F) maximum operating temperature  
Selectable lumen and CCT technology allows easy field-adjustable capability, luminaire ships with maximum output and 4000K CCT setting.  
All CCTs are within 3 MacAdam ellipses.  
Driver operates at 120-277V input, 0-10V dimmable driver.

**MOUNTING**

Designed for surface mount application.  
Safety cables (pair) come standard on mounting bracket.

**STANDARD FINISH**

90% minimum average reflective white polyester powder coat bonded to phosphate-free, multi-stage pretreated metal. All parts painted after fabrication to facilitate installation, increase efficiency, and inhibit corrosion.

**CERTIFICATION**

Option for "Assembled in America" upon request.  
IC Rated, suitable for Damp location.  
All luminaires are built to UL1598 standards and bear appropriate cULus labels.  
For Emergency application, equipment with UL924 certified battery packs.  
DLC<sup>®</sup> Standard (DesignLights Consortium Listed)

**WARRANTY**

5 year warranty, see Limited Warranty for additional information.



Front



Back



**LPA-SM SERIES SURFACE MOUNT BACKLIT PANEL**

**ORDER INFORMATION** **EXAMPLE: LPA-SM 4 BACKLIT**

<b>Fixture</b>	<b>Series</b>	<b>Model</b>	<b>Finish</b>	<b>Input</b>
	<b>LPA-SM</b>		<b>blank</b>	<b>blank</b>
<b>Mounting</b>	<b>blank</b>			

**Accessories  
Options**

**A SERIES**

**LPA-SM** Surface Mount Selectable Lumen and CCT Panel

**B MODEL**

<b>Code</b>	<b>Size</b>	<b>Power</b>	<b>CCT</b>	<b>lm/W (avg.)</b>
<b>1-BACKLIT</b>	1x4	20W / 28W / 34W / 41W	3000K / 3500K / 4000K / 5000K / 6500K	110lm/W
<b>2-BACKLIT</b>	2x2	20W / 28W / 34W / 41W	3000K / 3500K / 4000K / 5000K / 6500K	110lm/W
<b>4-BACKLIT</b>	2x4	28W / 34W / 41W / 50W	3000K / 3500K / 4000K / 5000K / 6500K	110lm/W

**C FINISH**

**blank** White

**D INPUT**

**blank** 120-277V, 0-10V Dimming

**E MOUNTING**

**blank** Surface Mount Bracket included

**F ACCESSORIES/OPTIONS**


**BAA** Assembled in America, compliant with BAA (COTS)  
**EMB-H08170\*** 90-Minute Self-Diagnostic Emergency Battery 8W 100-347VAC Input 170VDC Output  
**EMB-H18170\*** 90-Minute Self-Diagnostic Emergency Battery 18W 100-347VAC Input 170VDC Output

\*see page 5 for EMB spec

**LPA-SM SERIES SURFACE MOUNT BACKLIT PANEL**

**DIMENSIONS**

Model	L	W	D
LPA-SM-1-BACKLIT	47.70" (1212mm)	11.80" (301mm)	1.20" (31mm)
LPA-SM-2-BACKLIT	23.70" (602mm)	23.70" (602mm)	1.20" (31mm)
LPA-SM-4-BACKLIT	47.70" (1212mm)	23.70" (602mm)	1.20" (31mm)

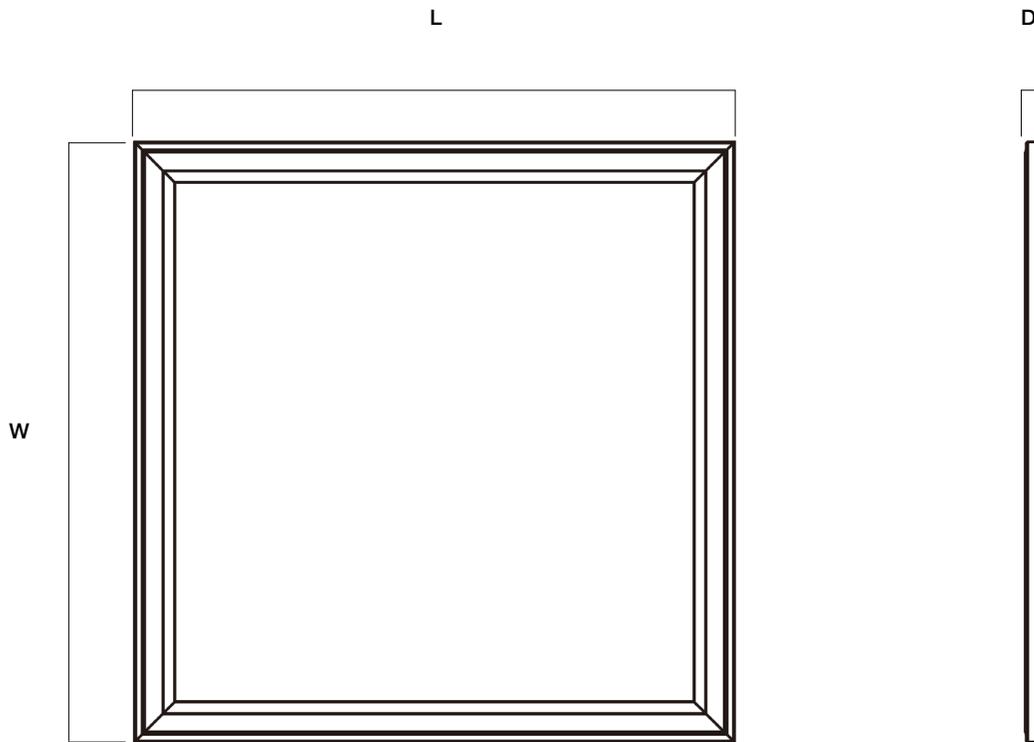

**LPA-SM SERIES SURFACE MOUNT BACKLIT PANEL**

**PERFORMANCE DATA**

SYSTEM WATTS	SIZE	VOLTAGE	LUMEN	LPW
20W	LPA-SM-1-BACKLIT LPA-SM-2-BACKLIT	120-277V 120-277V	2200	110
28W	LPA-SM-1-BACKLIT LPA-SM-2-BACKLIT	120-277V 120-277V	3080	110
34W	LPA-SM-1-BACKLIT LPA-SM-2-BACKLIT	120-277V 120-277V	3740	110
41W	LPA-SM-1-BACKLIT LPA-SM-2-BACKLIT	120-277V 120-277V	4510	110
28W	LPA-SM-4-BACKLIT	120-277V	3080	110
34W	LPA-SM-4-BACKLIT	120-277V	3740	110
41W	LPA-SM-4-BACKLIT	120-277V	4510	110
50W	LPA-SM-4-BACKLIT	120-277V	5500	110

**LPA-SM SERIES SURFACE MOUNT BACKLIT PANEL**

**EMB SPEC**

Model	Battery Capacity	Input	Output	Output Power	Operating Temp	Installation
EMB-H08170	90mins	100-347VAC	170VDC	8W	0°C ~ 50°C 32°F ~ 122°F	Factory or Field Install
EMB-H18170	90mins	100-347VAC	170VDC	18W	0°C ~ 50°C 32°F ~ 122°F	Factory or Field Install

