

CONSTRUCTION

Polycarbonate material housing, compact design with stainless steel latches. 3/4" knockout back and end of housing for end mount sensor, through wiring or surface conduit mount.

OPTICS

Frosted polycarbonate lens offers edge to edge smooth illumination for maximum visual comfort.

ELECTRICAL

Delivered average 160lm/W efficacy LEDs offer 80+ color rendering index (CRI).

Field Selectable Output and CCT (see ordering information for detail).

L70 >100,000 hours expected life.

-40°C up to 50°C (-40°F up to 122°F) maximum operating temperature.

Driver operates at 120-277V Input, Dim-to-Off 0-10V driver, 12V AUX Output.

Surge protection: L-N: 6kV; L/N-GND: 6kV.

Over temperature protection.

MOUNTING

Designed for direct wire or as a portable luminaire with use of power cord.*

Standard surface mountable underneath electrical box, or surface conduit mount through 3/4" knockout.

*Power-cord - optional add-on.

SENSORS (OPTIONAL)

SENSOR-819W-O1 End mount on/off motion sensor highbay lens (Wet).

SENSOR-819W-D1 End mount programmable motion and photocell sensor highbay lens (Wet).

SENSOR-BLE-819W-L1 End mount ALS CONTROL Bluetooth on/off motion sensor lowbay lens (Wet).

CONTROL-LVFA AVI-ON Bluetooth Mesh Controller.

SENSOR-PH-PB-U Integral Button Style Photocell.

STANDARD FINISH

White finish standard, IP66 for wet location.

CERTIFICATION

IK10 Impact Rated.

National Sanitation Foundation Certified & Listed.

IP66 Wet location label standard.

Meets Buy America Act requirements.

All luminaires are built to UL1598 standards and bear appropriate cULus labels.

For Emergency application, equipment with UL924 certified battery packs.

DLC® Premium (DesignLights Consortium Qualified).

WARRANTY

5 year warranty, see Limited Warranty for additional information.




VTNSF SERIES NSF CERTIFIED VAPOR TIGHT LINEAR

ORDER INFORMATION				EXAMPLE: VTNSF 200 SC WH UD	
Fixture	Series	Power & LM	CCT	Finish	Input
	VTNSF		SC	GR	UD
Accessories Options					
A	SERIES				
	VTNSF	NSF Certified Vapor Tight Linear Field Selectable Output & CCT			
B	POWER & LM				
	Code	Size	Power	LM	
	135	4-Foot	Field Selectable 100W / 115W / 135W	16,153 / 18,378 / 21,280lm	
	200	4-Foot	Field Selectable 155W / 185W / 200W	25,704 / 30,240 / 32,256lm	
C	CCT				
	MC	Field Selectable 3500K / 4000K / 5000K			
D	FINISH				
	WH	White			
E	INPUT				
	UD	120-277V Input, 0-10V Dim-to-Off			
F	ACCESSORIES/OPTIONS				
	AIA	Assembled in America, Compliant with BAA (COTS)			
	MOUNT-VTNSF-HOOK	V Hook Mount - Chain Provided by Others			
	EMB-18W-B*	90-Minute Self-Diagnostic Emergency Battery 18W 100-347VAC Input 170VDC Output			
	EMB-18W-C-B*	90-Minute Self-Diagnostic Emergency Battery 18W 100-347VAC Input 170VDC Output -20°C-50°C (-4°F-122°F)			
	REMOTE-RC100	Handheld Remote Commissioning Tool for SENSOR-819-D1/D2 Only			
	SENSOR-819W-O1*	End mount on/off motion sensor lowbay lens (Wet)			
	SENSOR-819W-D1*	End mount on/off/dimming and photocell sensor lowbay lens (Wet)			
	SENSOR-BLE-819W-L1*	End Mount PIR Bluetooth Daylight Harvesting Sensor (ALS Control Mobile App) / L1: up to 20FT (Wet)			
	SENSOR-PH-PB-U*	Button Style Photocell			
	CONTROL-LVFA*	AVI-ON Bluetooth Mesh Control System			
	SURGE-LSP4-U	10kV Surge Protector			
	-PLUG	6-Foot Black Cord and Plug (3-Prong)			
	-CORD	18-3 300V 6 Foot Cord			
	TWIST-LOCK	Specify Plug Type: L515P / L715P / HBL5929 / L8-20P			
	*see page 4 for sensor spec				
	**see page 5 for emb spec				

VTNSF SERIES NSF CERTIFIED VAPOR TIGHT LINEAR

DIMENSIONS

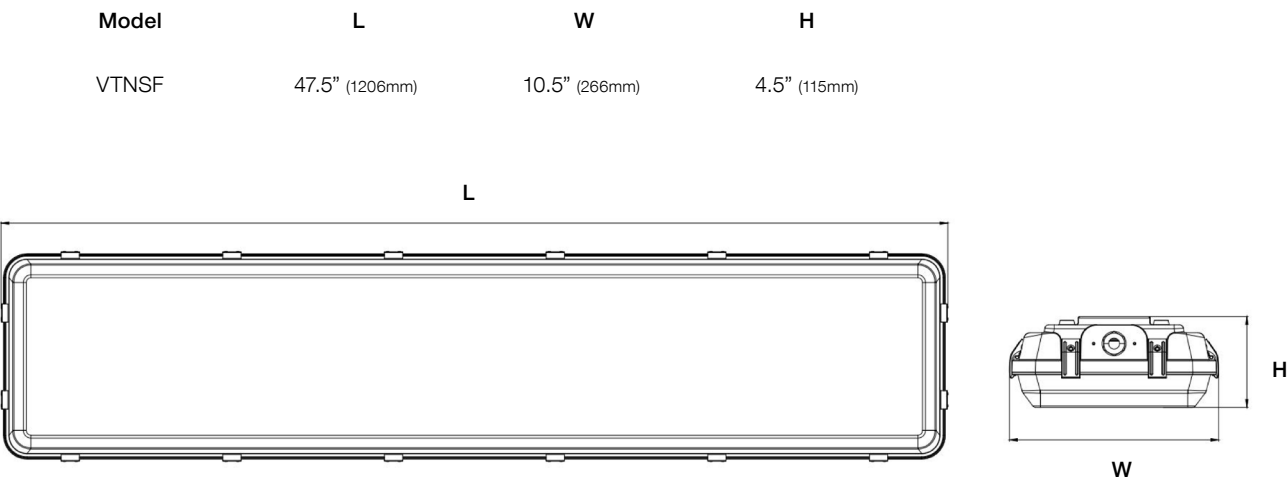

PERFORMANCE DATA

MODEL	SYSTEM WATTS	VOLTAGE	3500K		4000K		5000K	
			LUMENS	LPW	LUMENS	LPW	LUMENS	LPW
VTNSF-135-MC	100W	120-277V	15,775	164	15,932	173	16,153	166
	115W	120-277V	17,947	163	18,127	171	18,378	164
	135W	120-277V	20,781	160	20,989	169	21,280	162
VTNSF-200-MC	155W	120-277V	25,101	165	24,352	174	25,704	167
	185W	120-277V	29,531	163	29,826	171	30,240	165
	200W	120-277V	31,500	161	31,815	169	32,256	162