

CS SERIES BACKLIT PANEL

Client:
Project:
Type:
Quantity:

CONSTRUCTION

Low profile extruded aluminum frame, all corners are rounded for safe handling. Multiple wiring entrances on driver enclosure for easy access. The backplate includes integral T-bar clips for installation into T-grid ceilings.

OPTICS

Backlit design provides exceptional lighting distribution. Frosted PMMA lens offers edge to edge illumination without pixilation or bright spots.

ELECTRICAL

Long-life, high-efficacy, micro-power LEDs, illumination for extended service life. Greater than 70% LED lumen maintenance at 100,000 hours (L70>100,000). Selectable lumen and CCT technology allows easy field-adjustable capability, luminaire ships with maximum output and 4000K CCT setting. All CCTs are within 5 MacAdam ellipses, 80CRI. Optional 90CRI. Driver operates at 120-277V input, 0-10V dimmable driver.

CONTROL (OPTIONAL)

CONTROL-BLE-620 Bluetooth Wireless Fixture Controller for CCT Tuning, Dimming, Grouping, Scheduling Features (ALS Control Mobile App)

MOUNTING

Designed to accommodate lay-in ceilings, Slot T, and T-bar suspension system for 5/8" and 3/8" width. Built-in earthquake clips come standard. Optional: Surface/cable mount applications, use surface/cable kit accessories. Optional: Plaster or sheetrock installations, select flange kit.

STANDARD FINISH


90% minimum average reflective white polyester powder coat bonded to phosphate-free, multi-stage pretreated metal. All parts painted after fabrication to facilitate installation, increase efficiency, and inhibit corrosion.

CERTIFICATION

IC Rated, Suitable for Damp location. All luminaires are built to UL1598 standards and bear appropriate cULus labels. For Emergency application, equipment with UL924 certified battery packs. DLC® Premium (DesignLights Consortium Qualified)

WARRANTY

5 year warranty, see Limited Warranty for additional information.

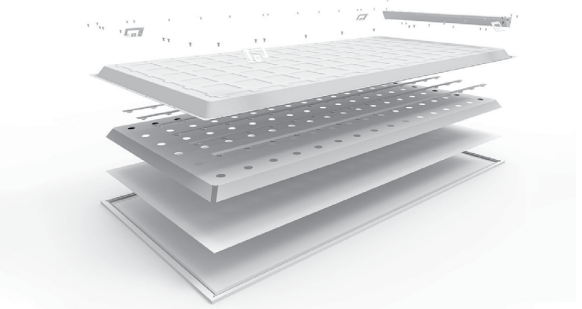

SHIPPING DATA

Product	Measurement	Weight
CSP-14 (2-pack)	49"L x 13"W x 3"H	11 lb
CSP-22 (2-pack)	26"L x 26"W x 3"H	10 lb
CSP-24 (2-pack)	49"L x 25"W x 3"H	18 lb



CS SERIES BACKLIT PANEL

ORDER INFORMATION				EXAMPLE: CSP 24-BACKLIT	
Fixture	Series	Model	Finish	Input	
	CSP		blank	blank	
Mounting					
Accessories					
Options					
A	SERIES				
	CSP	CS Series - High Efficiency Backlit Panel			
B	MODEL				
	CODE	SIZE	POWER	CCT	LM/W (AVG.)
	14-BACKLIT	1x4	25W / 30W / 40W	3500K / 4000K / 5000K	125lm/W
	22-BACKLIT	2x2	25W / 30W / 40W	3500K / 4000K / 5000K	125lm/W
	24-BACKLIT	2x4	30W / 40W / 50W	3500K / 4000K / 5000K	125lm/W
C	FINISH				
	blank	White			
D	INPUT				
	blank	120-277V, 0-10V Dimming			
E	MOUNTING				
	blank	Standard lay-in			
	MOUNT-LP-14-FGK	1x4 Flange Kit (Plaster, Sheetrock or Drywall)			
	MOUNT-LP-22-FGK	2x2 Flange Kit (Plaster, Sheetrock or Drywall)			
	MOUNT-LP-24-FGK	2x4 Flange Kit (Plaster, Sheetrock or Drywall)			
	MOUNT-LP-14-SMK	1x4 Surface Mount Kit for LPA-1			
	MOUNT-LP-22-SMK	2x2 Surface Mount Kit for LPA backlit			
	MOUNT-LP-24-SMK	2x4 Surface Mount Kit for LPA backlit			
	MOUNT-LP-PMK	Aircraft Cable Pendant Mount			
F	ACCESSORIES/OPTIONS				
	AIA	Assembled in America, compliant with BAA (COTS)			
	-C	6-Foot Flex			
	90CRI	90CRI			
	CONTROL-BLE-620*	Bluetooth Wireless Fixture Controller for CCT Tuning, Dimming, Grouping, Scheduling Features (ALS Control Mobile App)			
	EMB-H08170*	Self-Diagnostic Emergency Battery 8W 100-347VAC Input 170VDC Output			
	EMB-H18170*	Self-Diagnostic Emergency Battery 18W 100-347VAC Input 170VDC Output			
	GTD-ESRLUD**	Emergency Battery Generator Transfer Device 120-277 VAC Input			


**see page 5 for EMB and sensor spec

***see page 7-8 for GTD spec

CS SERIES BACKLIT PANEL

DIMENSIONS

Model	L	W	D
CSP-14	47.80" (1214mm)	11.90" (301mm))	1.40" (36mm)
CSP-22	23.70" (603mm)	23.70" (603mm))	1.40" (36mm)
CSP-24	47.80" (1219mm)	23.70" (603mm))	1.40" (36mm)

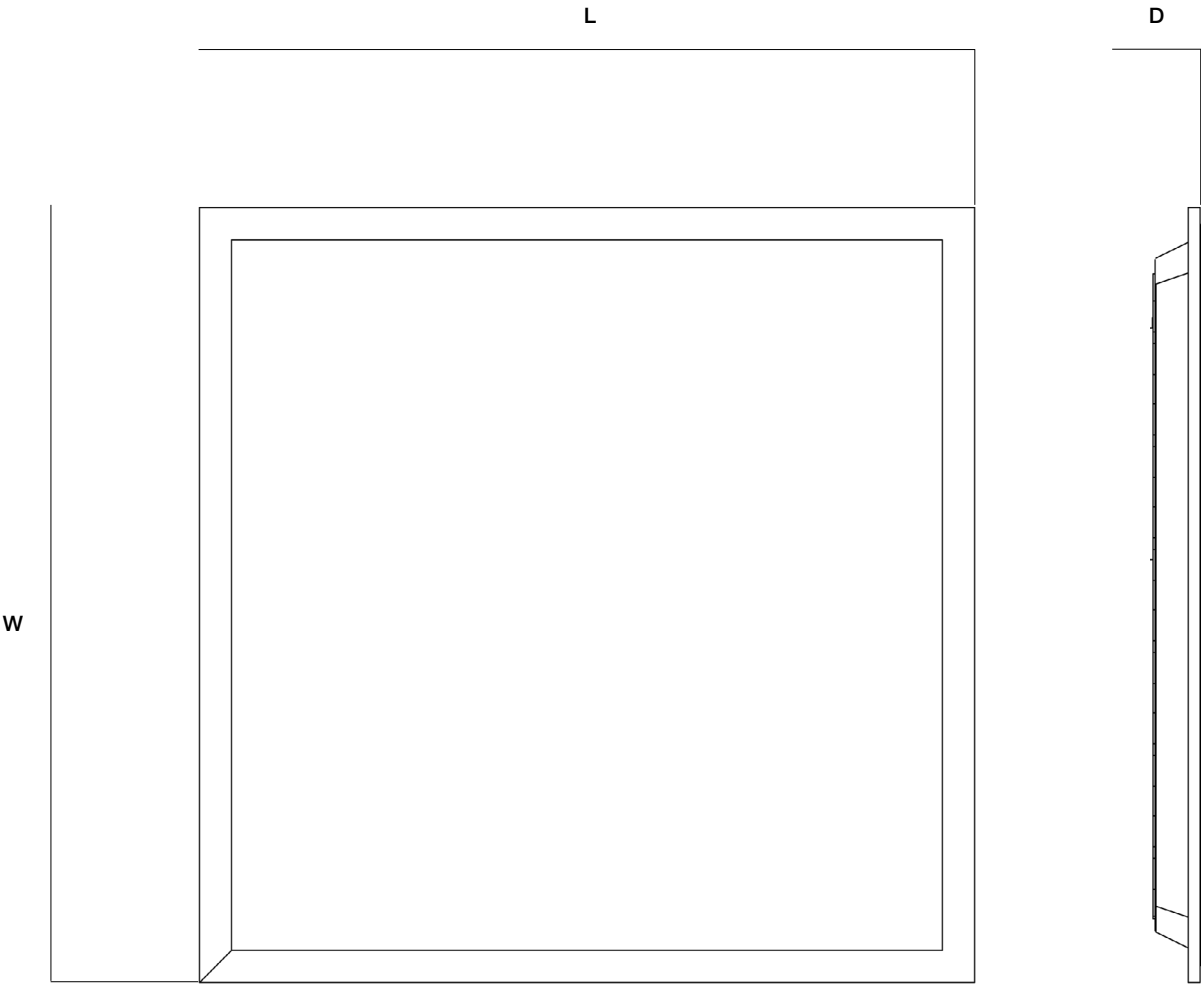

CS SERIES BACKLIT PANEL

PERFORMANCE DATA - CSP

SYSTEM WATTS	SIZE	VOLTAGE	LUMEN	LPW	QTY ON PALLET
25W	CSP-14 CSP-22	120-277V	3,125	125	120 pcs 144 pcs 72 pcs
30W	CSP-14 CSP-22 CPS-24	120-277V	3,750	125	120 pcs 144 pcs 72 pcs
40W	CSP-14 CSP-22 CPS-24	120-277V	5,000	125	120 pcs 144 pcs 72 pcs
50W	CSP-24	120-277V	6,250	125	72 pcs


DLC CODE

Part Number	DLC Product ID	DLC Class
CSP-14MC-BACKLIT	Pending	Premium
CSP-22MC-BACKLIT	S-QW0FJD	Premium
CSP-24MC-BACKLIT	S-H6NK5B	Premium

CS SERIES BACKLIT PANEL

EMB SPEC

Model	Battery Capacity	Input	Output	Output Power	Operating Temp	Installation
EMB-H08170	90mins	100-347VAC	170VDC	8W	0°C ~ 50°C 32°F ~ 122°F	Factory or Field Install
EMB-H18170	90mins	100-347VAC	170VDC	18W	0°C ~ 50°C 32°F ~ 122°F	Factory or Field Install

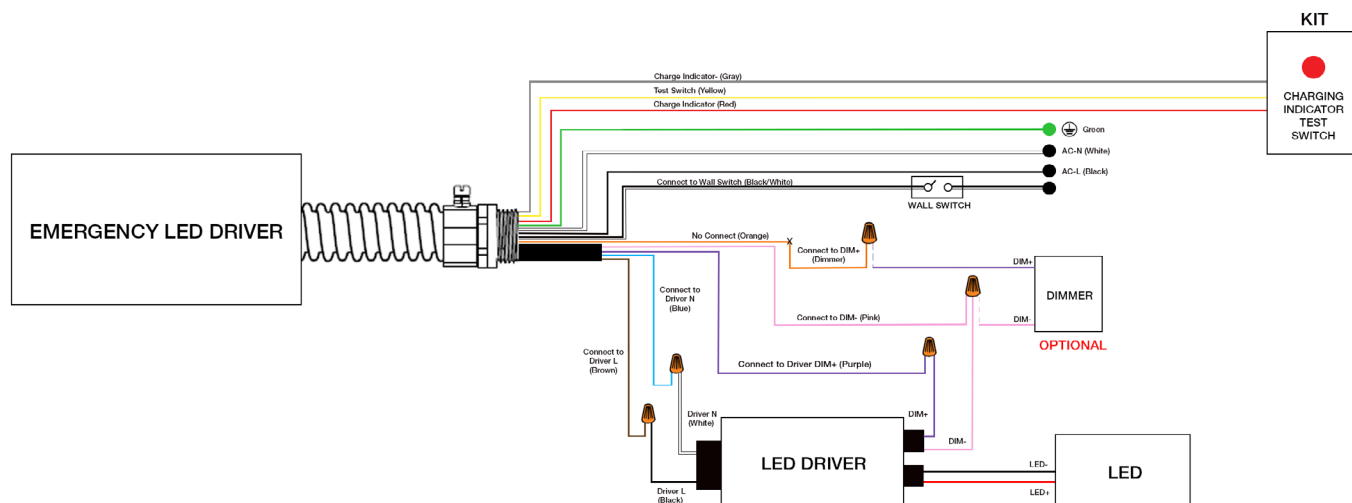

SENSOR SPEC

Model	Type	Mounting	Coverage	Input	Function	Programmable
CONTROL-BLE-620 (see page 6 for detail)	Fixture Controller	Integral to Fixture	-	12V DC	CCT Tuning Dimming Grouping Time Schedule	ALS Control Bluetooth Mobile App



CONTROL-BLE-620

FEATURE


- **Installation:** Factory installed, 12V AUX power required
- **Commissioning:** Wirelessly through ALS Control Mobile App (iOS / Android)
- **Certification:** DLC 5.1 Networked Lighting Control System
- **Control:** Dimming, High-End Trim, Zoning, Continuous Bi-level Dimming
- **CCT Tuning:** CCT Tuning feature for Dual/Multi-CCT LED board fixture only
- **Sensor:** Plug-N-Play with ALS Control sensors
- **Zone Control:** Zoning and Grouping control, Scheduling



SPECIFICATIONS


WIRELESS STANDARDS:	5.0 Bluetooth Mesh
INPUT VOLTAGE:	12-14VDC, >50mA
OUTPUT VOLTAGE:	LED Max. 150VDC Max. 2A
CONTROL OUTPUT:	0-10V
OPERATING TEMP:	-40°F ~ +158°F (-40°C ~ +70°C)
COMMISSIONING RANGE:	50FT
BLUETOOTH RANGE:	100FT
WARRANTY:	5 years
IP RATING:	IP20

DIMENSIONS

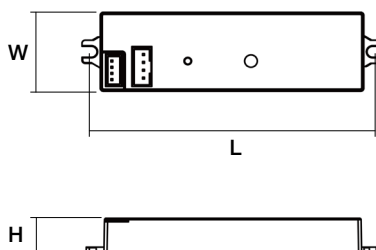

L	H	W
3.5" (89mm)	0.43" (11mm)	1.00" (26mm)
Lead Wire		Antenna Wire
10.60" (270mm)		10.60" (270mm)

WIRING DIAGRAM

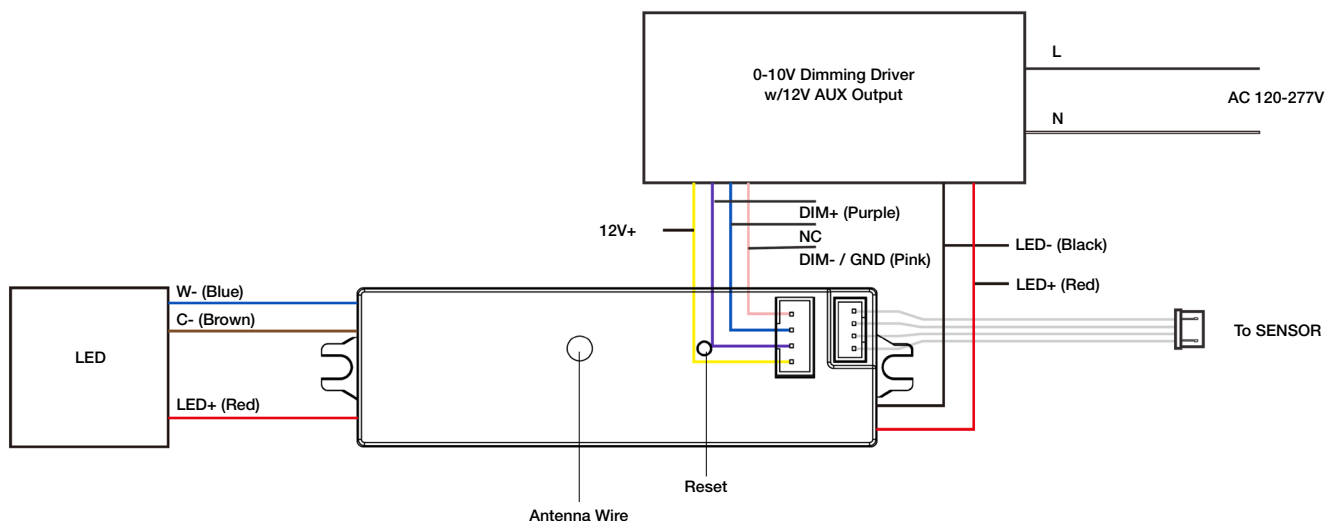


GTD-ESRLUD Generator Transfer Device

Client:
Project:
Type:
Quantity:

CONSTRUCTION

Yellow metal casing. Integrates with dry contact systems to provide lighting during power outages. Features a slim enclosure, allowing for seamlessly integrating into existing building infrastructure.

Designed for commercial and industrial applications that require an emergency load to be switched on during a loss of normal power.

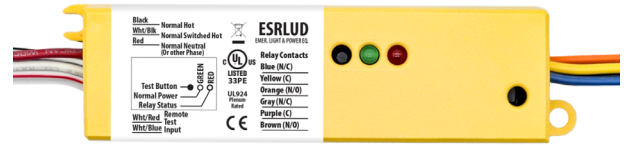

SPECIFICATIONS

COIL CURRENT:	Normal Power = 6mA MAX
COIL VOLTAGE INPUT:	120-277V AC (50/60 Hz)
EXPECTED RELAY LIFE:	10 Million Cycles Min Mechanical
RELAY CONTACT RATINGS:	10 Amp Resistive @ 30 V DC 10 Amp General Use @ 277 V AC
OPERATING TEMP:	-30°F ~ +140°F (-34°C ~ +60°C)
OPERATE TIME:	18ms
HUMIDITY RANGE:	5-95% (Noncondensing)
LED:	Green = Normal Power Red = Relay Status
DIMENSIONS:	1.40"H x 5.63"W x 1.00"D
WIRES:	16", 600V Rated
OVERRIDE (TEST SWITCH):	No
APPROVALS:	UL924, C-UL, CE, ROHS
NOTES:	Device Draws no Current From Emergency Source

TESTING

INITIAL TEST FOR CORRECT WIRING:	Apply Normal Power To Normal Power Input a. Green LED (Normal Power) should be ON b. Red LED (Relay Status) should be ON c. Load should be OFF d. Relay Contact (N/O) should be CLOSED
LOCAL TEST BUTTON:	1. Turn Switched Circuit OFF. Load be OFF. 2. Press and Hold "Local Test Button" 3. Load should Turn ON 4. Release "Local Test Button" and Emergency Light should Turn OFF.
WALL SWITCH:	1. Turn ON Wall Switch If not already ON 2. Load should Turn ON 3. Turn Wall Switch OFF 4. Load will Turn OFF


TROUBLESHOOTING

CONDITION	ACTION
Green LED is OFF	<ul style="list-style-type: none"> Check Normal Power Input Wiring (Black and Red Wires) and Voltage.
Red LED is OFF but Load is OFF	<ul style="list-style-type: none"> Check Bulbs and Ballast. Check Load Wiring (Blue Wire and Load's Neutral). Replace Unit. (Assuming N/C Contact is Used).
Load is ON but Red LED is ON	<ul style="list-style-type: none"> Replace Unit. (Assuming N/C Contact is Used).
Red LED does not Turn OFF and Load does not Turn ON when being tested	<ul style="list-style-type: none"> Check Bulbs and Ballast. Check Wiring Connections if Using a Remote Test Option. Press Local Test Button on the Unit. Replace Unit.
Red LED will not Turn ON and Load will not Turn OFF	<ul style="list-style-type: none"> Verify Status of Normal Power Input. Open Wall Switch Input. Verify That No Test Inputs are Stuck Closed.

GTD-ESRLUD Generator Transfer Device

WIRING DIAGRAM

USING EMERGENCY LIGHTING AS NORMAL LIGHTING

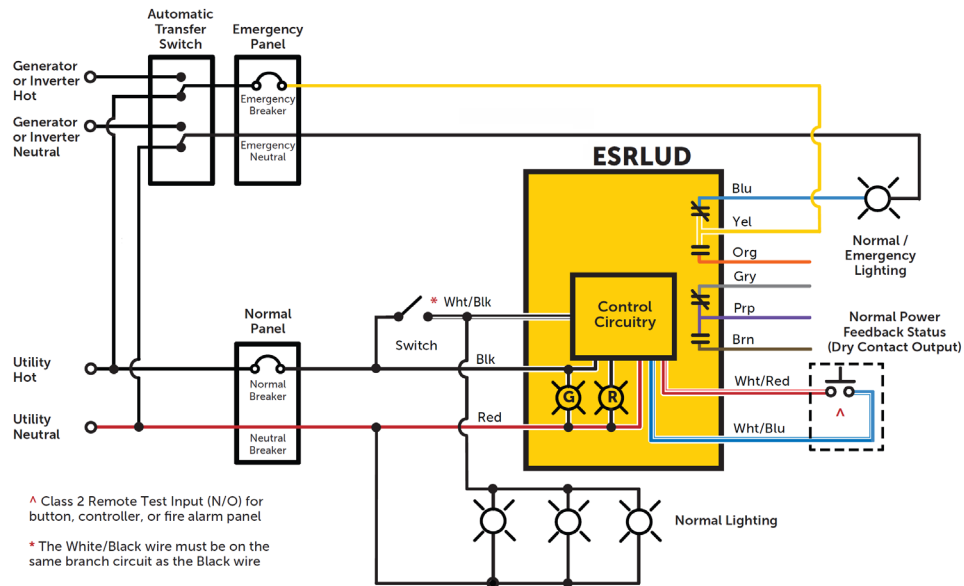

OVERRIDING A 0-10V DIMMER

