

SENSOR-PH-RP TWIST-LOCK RECEPTACLE

Client:
Project:
Type:
Quantity:

FEATURE


- **Installation:** Factory Install - Integral to Fixture
- **Control:** Hold time, High-Low setting, continuous Bi-level dimming, manual/auto - on/off
- **Sensor:** Dusk-to-Dawn Control

SPECIFICATIONS


SENSOR TYPE:	Twist-Lock 7-Pin Receptacle
INPUT VOLTAGE:	0~480VAC
OPERATING TEMP:	-40°F ~ +158°F (-40°C ~ +70°C)
RATED FREQUENCY:	50/60Hz
RATED LOADING:	15Amp
LEAD:	16AWG, 14AWG
SIGNAL CONTROL:	0-30VDC, 250mA MAX
RELATIVE HUMIDITY:	96%
WARRANTY:	5 years



DIMENSIONS

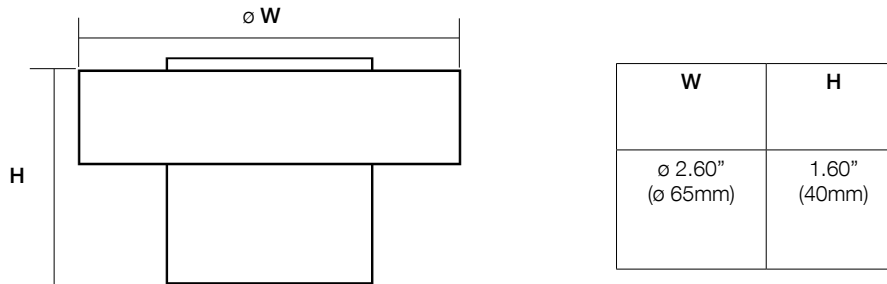

WIRING DIAGRAM

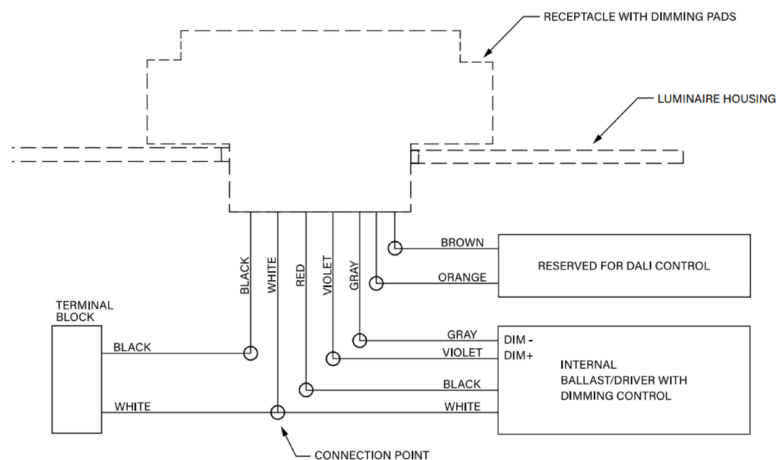

ORDER CODES

SENSOR-PH-RP-H	Twist-Lock 3-Pin (Wet) Photocell
SENSOR-PH-RP-HD	Twist-Lock 7-Pin (Wet) Photocell

