

SMPR G2 SERIES SURFACE MOUNT PANEL ROUND

Client:
Project:
Type:
Quantity:

CONSTRUCTION

Offered in 5", 7", 9", 11", and 13" sizes, the fixture features a robust die-cast aluminum trim designed for surface mounting. Engineered for secure installation to standard junction boxes with enhanced durability and heat dissipation.

OPTICS

Edgelit panel, durable PMMA lens, gasketed and sealed prevent splash of water or dust object from entry.

ELECTRICAL

90+ CRI.

120V Input Triac dimming.

5 CCT selectable light engine 2700~5000K.

Greater than 70% LED lumen maintenance at 50,000 hours.

-20°C up to 45°C (-4°F up to 113°F) maximum operating temperature.

MOUNTING

New Construction: Surface Mount to standard depth 2.75" or 3.5" J-box.

STANDARD FINISH

Corrosion resistant White finish, suitable for wet locations.

Decorative trim rings available in Brushed Nickel, Black, and Bronze.

CERTIFICATION

IP44 Wet location listed.

Meets Buy America Act requirements.

All luminaires are built to UL1598 standards and bear appropriate cETLus labels.

Title 24 JA8 compliant; see local ordinance for qualification information.

ENERGY STAR® certified for SMPR-G2-5, SMPR-G2-7, SMPR-G2-9 model.

WARRANTY

5 year warranty, see Limited Warranty for additional information.



Decorative Trim

SHIPPING DATA

Product	Measurement	Weight
SMPR-G2-5	6"L x 6"W x 1"H	2 lb
SMPR-G2-7	8"L x 8"W x 1"H	2 lb
SMPR-G2-9	9"L x 9"W x 1"H	2 lb
SMPR-G2-11	11"L x 11"W x 1"H	3 lb
SMPR-G2-13	13"L x 13"W x 1"H	3 lb



SMPR G2 SERIES SURFACE MOUNT PANEL ROUND

ORDER INFORMATION				EXAMPLE : SMPR G2 7 9SC WH S	
Fixture	Series	Model	CCT	Finish	Input
	SMPR-G2		SC	WH	S
Accessories Options					
A	SERIES				
	SMPR-G2	Surface Mount Panel Round Gen 2			
B	MODEL				
	CODE	TRIM TYPE	POWER	LM	
	5	5-inch aperture	10W	829lm (avg.)	
	7	7-inch aperture	15W	1174lm (avg.)	
	9	9-inch aperture	18W	1394lm (avg.)	
	11	11-inch aperture	21W	2029lm (avg.)	
	13	13-inch aperture	24W	2183lm (avg.)	
C	CCT				
	9SC	90 CRI Field Selectable 2700/3000/3500/4000/5000K			
D	FINISH				
	WH	White finish			
E	INPUT				
	S	120V Input Triac Dimming			
F	ACCESSORIES/OPTIONS				
	AIA	Assembled in America, compliant with BAA (COTS)			
	TRIM-SMPR-G2-5- ____	SMPR-G2 5" Decorative Trim BN - Brushed Nickel BK - Black BZ - Bronze			
	TRIM-SMPR-G2-7- ____	SMPR-G2 7" Decorative Trim BN - Brushed Nickel BK - Black BZ - Bronze			
	TRIM-SMPR-G2-9- ____	SMPR-G2 9" Decorative Trim BN - Brushed Nickel BK - Black BZ - Bronze			
	TRIM-SMPR-G2-11- ____	SMPR-G2 11" Decorative Trim BN - Brushed Nickel BK - Black BZ - Bronze			
	TRIM-SMPR-G2-13- ____	SMPR-G2 13" Decorative Trim BN - Brushed Nickel BK - Black BZ - Bronze			
	CONTROL-XFAC*	AVI-ON Bluetooth Zone Controller Adapter			
	EMB-H18170*	90-Minute Self-Diagnostic Emergency Battery 18W 100-347VAC Input 170VDC Output (SMPR-G2-5 only)			
	EMB-H40170*	90-Minute Self-Diagnostic Emergency Battery 40W 100-347VAC Input 170VDC Output (SMPR-G2-7 and SMPR-G2-9 only)			


*see page 5 for sensor spec

*see page 5 for EMB spec

SMPR G2 SERIES SURFACE MOUNT PANEL ROUND


DIMENSIONS

MODEL	W1	W2	H
SMPR-G2-5	ø 4.41" (113mm)	ø 5.51" (141mm)	0.79" (21mm)
SMPR-G2-7	ø 6.38" (163mm)	ø 7.48" (191mm)	0.79" (21mm)
SMPR-G2-9	ø 7.76" (198mm)	ø 8.86" (226mm)	0.79" (21mm)
SMPR-G2-11	ø 9.8" (250mm)	ø 10.98" (280mm)	0.98" (26mm)
SMPR-G2-13	ø 11.57" (295mm)	ø 12.8" (326mm)	0.98" (26mm)

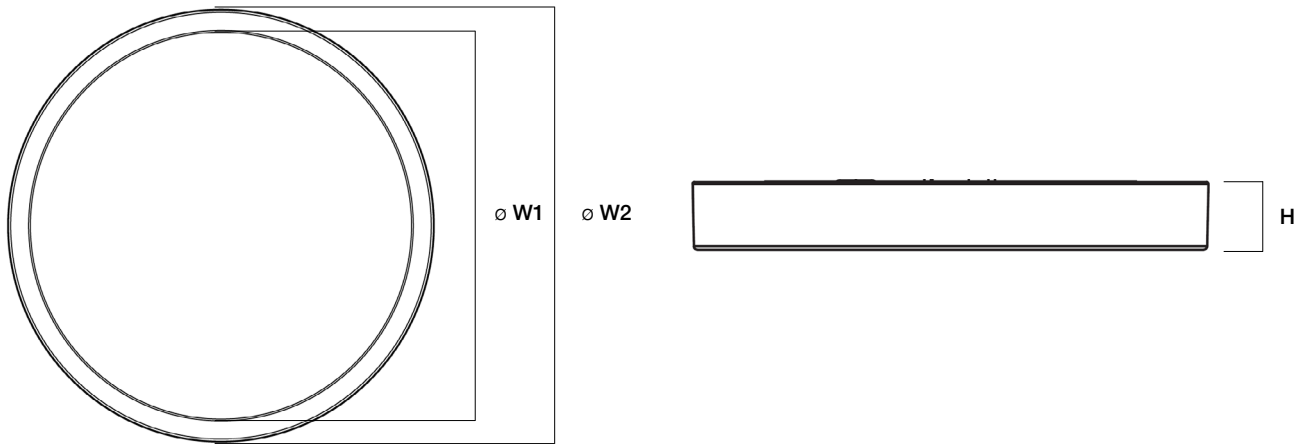

APPLICATION

Surface Mount
(Standard)

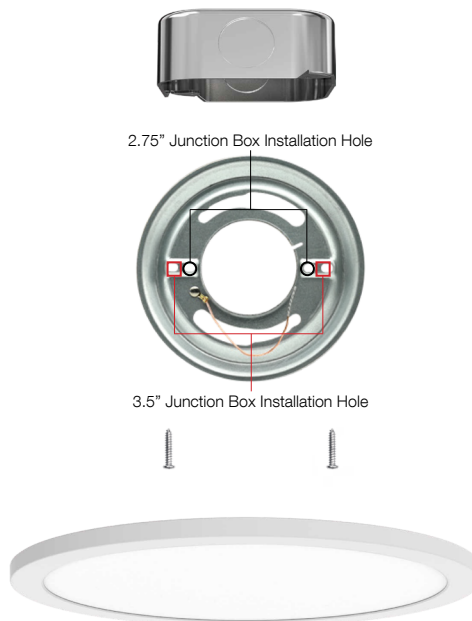

SMPR G2 SERIES SURFACE MOUNT PANEL ROUND

PERFORMANCE DATA

SIZE (INCHES)	SYSTEM WATTS	VOLTAGE	2700K (90CRI)		3000K (90CRI)		3500K (90CRI)		4000K (90CRI)		5000K (90CRI)	
			LUMENS	LPW	LUMENS	LPW	LUMENS	LPW	LUMENS	LPW	LUMENS	LPW
5	10W	120V	771	78	812	82	858	86	860	87	846	85
7	15W	120V	1091	74	1149	78	1214	82	1217	82	1198	81
9	18W	120V	1296	75	1364	78	1442	82	1446	83	1423	82
11	21W	120V	1835	87	1939	93	2128	103	2161	103	2084	99
13	24W	120V	1973	85	2086	91	2289	101	2324	101	2242	97

SMPR G2 SERIES SURFACE MOUNT PANEL ROUND

SENSOR SPEC


Model	Type	Mounting	Coverage	Input	Function	Programmable
CONTROL-XFAC (see page 5 for detail)	Fixture Controller	-	-	100-277VAC	Bluetooth On/Off/Dimming Scheduling	AVI-ON Bluetooth Mobile App



CONTROL-XFAC


EMB SPEC

Model	Battery Capacity	Input	Output	Output Power	Operating Temp	Installation
EMB-H18170	90mins	100-347VAC	170VDC	18W	0°C ~ 50°C 32°F ~ 122°F	Factory or Field Install
EMB-H40170	90mins	100-347VAC	170VDC	40W	0°C ~ 50°C 32°F ~ 122°F	Factory or Field Install

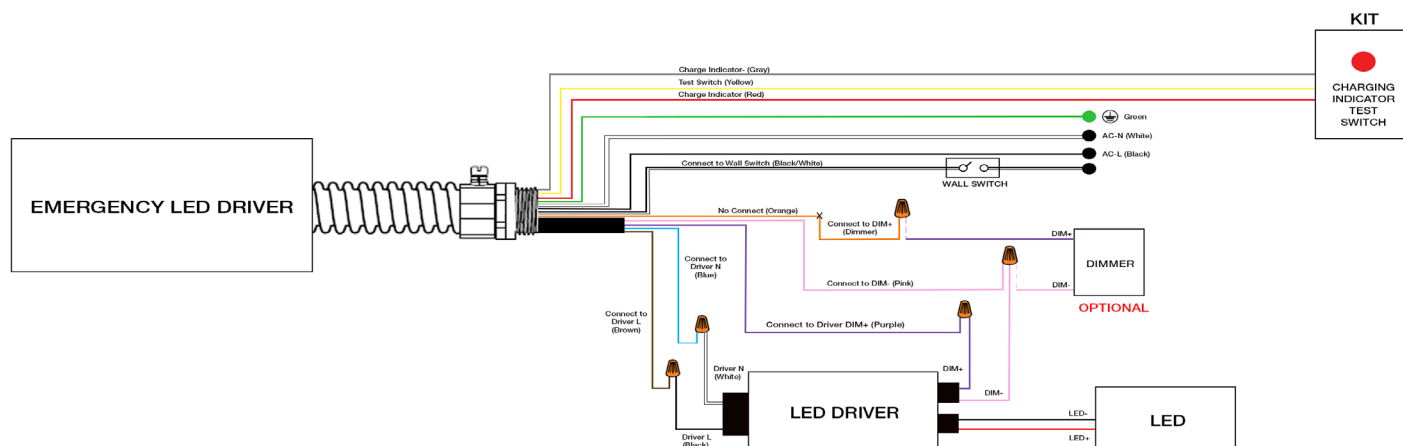

SMPR G2 SERIES SURFACE MOUNT PANEL ROUND

CONTROL-XFAC SPEC

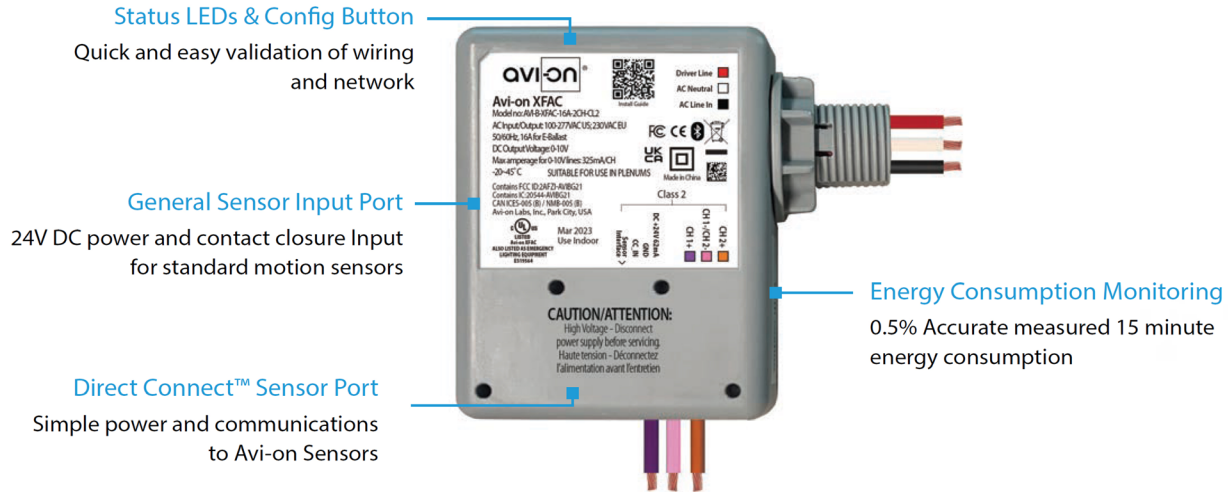

SPECIFICATIONS

INPUT VOLTAGE:	100-277VAC
CURRENT:	MIN: 20 / 14mA MAX: 81 / 46mA
0-10V DIMMING:	100-277VAC
SIZE:	3.58" x 3.58" x 1.57" (91mm x 91mm x 40mm)
STORAGE TEMP:	-40°F to + 185°F (-40°C to + 85°C)
OPERATING TEMP:	-4°F to + 113°F (-20°C to + 45°C)

RADIO FREQUENCY:	50/60Hz
RELAY CURRENT:	16A
PROTECTION/IMMUNITY:	LEVEL 4 Contact Discharge: ± 8kV Air Discharge: ±12kV 325mA / CH
AMPERAGE FOR 0-10V LINES:	5 years
WARRANTY:	FCC: 2AFZI-AVIBG21 IC: 20544-AVBG21
REGULATORY:	BQB: D059595, DID: 185220 UL 924, 2043

WIRING DIAGRAM

