

PTL SERIES DECORATIVE POST TOP

Client:
 Project:
 Type:
 Quantity:

CONSTRUCTION

HOUSING + COVER: Hinged die-cast aluminum housing and cover with cupola.
 EPA: 2.015

OPTICS

Injection-molded polycarbonated optic lens available with Type III and V distribution.
 Frosted temper glass allows clarity and resistance to the gradual discoloration that results from exposure to sunlight.

ELECTRICAL

80+ CRI Lumileds available for 5000K CCT.
 Optional CCT Selectable model available - see Ordering Information.
 -40°C up to 45°C* (-40°F up to 113°F) maximum operating temperature.
 L70 @ 105C > 60,000hrs | L70 @ 40C >200,000hrs.
 50/60Hz, <20% THD, 0.9 power factor.
 Driver operates at 120-277V input, 0-10V dimmable driver.
 Optional 347/480V input.

SENSOR (OPTIONAL)

SENSOR-PH-PT-U/UD/HD Twist lock dimming/non-dimming photocontrol.

MOUNTING

Self-aligning pole-top fitter fits 2-3/8" O.D. pole tops or vertical tenons.
 Optional 3", 4" and 5" tenon adapter.

STANDARD FINISH

Corrosion resistant Black powder coating finish.

CUSTOM FINISH

Corrosion resistant Dark Bronze, Graphite Metallic, Gray, Silver, White, Custom RAL#

CERTIFICATION

IP65 Wet location label standard.
 Meets Buy America Act requirements.
 IDA compliant: with 3000K color temperature selection.
 All luminaires are built to UL1598 standards and bear appropriate cETLus labels.
 DLC® (DesignLights Consortium Qualified).

WARRANTY

5 year warranty, see Limited Warranty for additional information.



PTL w/Optional Twist Lock Photocell



SHIPPING DATA

Product	Measurement	Weight
PTL-30	16"L x 16"W x 20"H	28 lb
PTL-60	16"L x 16"W x 20"H	28 lb
PTL-120	16"L x 16"W x 20"H	30 lb



PTL SERIES DECORATIVE POST TOP



ORDER INFORMATION					EXAMPLE: PTL 60 SC T5 SF3 BK UD		
Fixture	Series	Power & LM	CCT	Distribution	Mounting	Finish	Input
	PTL			5M	SF3		UD
Accessories Options							
A	SERIES						
	PTL	Decorative Post Top					
B	POWER & LM			B	POWER & LM		
	Code	Power	LM		Code	Power	LM
	120	120W	13,800		30	30W	3,300
					60	60W	6,600
C	CCT			C	CCT		
	40	4000K			SC	Selectable 3000K / 4000K / 5000K	
	50	5000K					
D	DISTRIBUTION						
	3M	Type III Medium					
	5M	Type V Medium					
E	MOUNTING						
	SF3	Self-aligning pole-top fitter fits 2-3/8" ~ 3" O.D.					
F	FINISH						
	Standard						
	BK	Black					
	Custom Color						
	CC	DB	Dark Bronze	GM	Graphite Metallic	GR	Gray
		SV	Silver	WH	White	RAL#	
G	INPUT						
	UD	110-277V, 0-10V Dimmable			HD	347/480V, 1-10V Dimming	
H	ACCESSORIES/OPTIONS						
	AIA	Assembled in America, compliant with BAA (COTS)					
	SENSOR-PH-PT-U / UD / HD*	Twist Lock Photocell / U: 120-277V, UD: 120-277V, HD: 480V input					
	SURGE-LSP4-U / H	10kV inline Surge Protection for Universal input / U: 120-277V, H: 480V input					
	MOUNT-4SQR-SP-D	4" Tenon Adapter for Round Pole					
	MOUNT-5SQR-SP-D	5" Tenon Adapter for Round Pole					
	MOUNT-4SQ-SP-D	4" Tenon Adapter for Square Pole					
	MOUNT-5SQ-SP-D	5" Tenon Adapter for Square Pole					

*see page 4 for sensor spec

PTL SERIES DECORATIVE POST TOP

DIMENSIONS

Model	H1	H2	W1	W2
PTL-30 / 60 / 120	24.90" (643mm)	17.55" (445mm)	13.78" (350mm)	ø 3.18" I.D. (76mm)

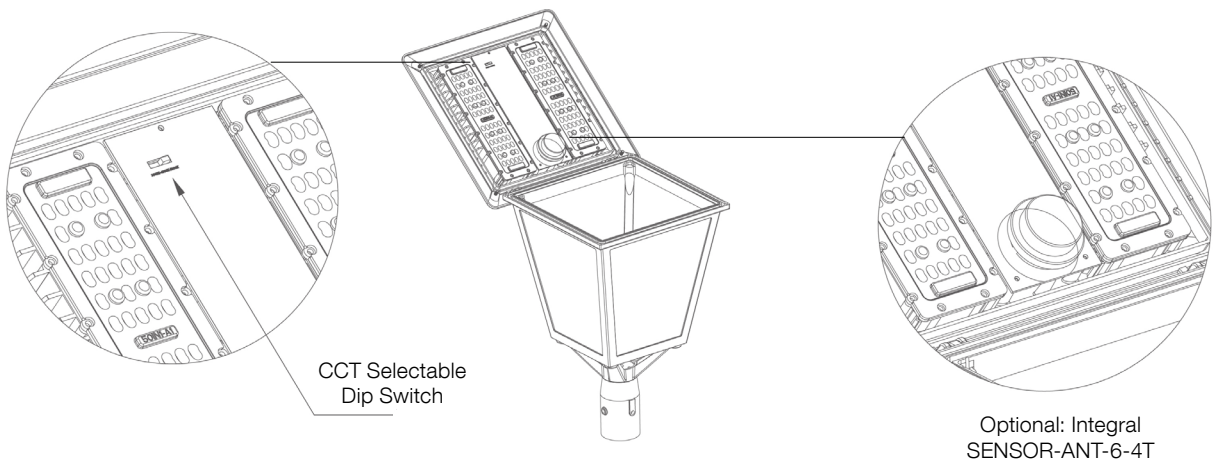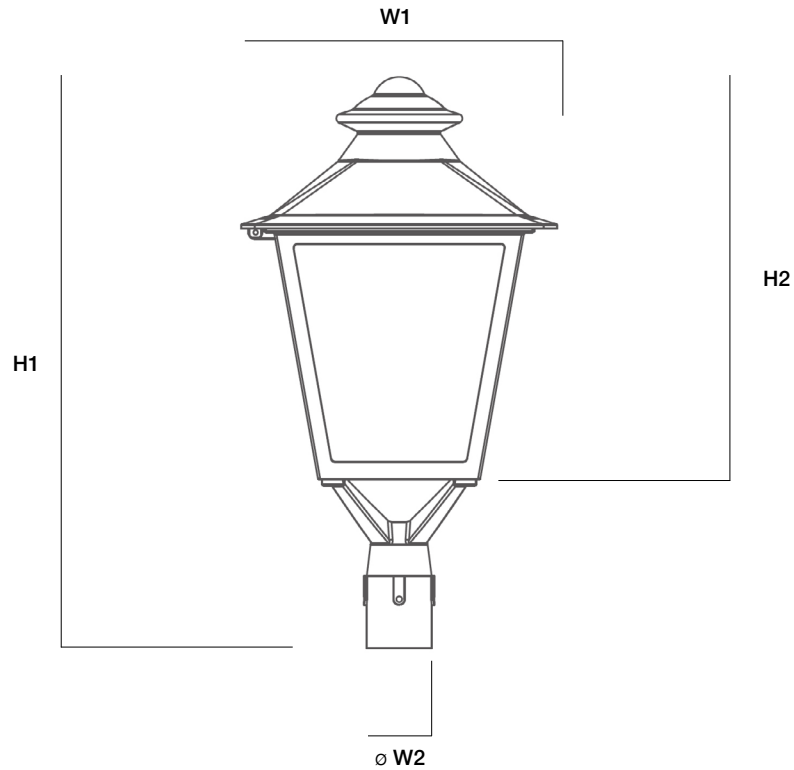

PTL SERIES DECORATIVE POST TOP

DLC CODE

Part Number	DLC Product ID	DLC Class
PTL-30 SC XX SF3 XX UNVD @ 3000K	OEM SKU# YR-TP350-W30-[P1;P2;M;PM;PN]-C3-[Z1;Z2](3000K) DLC Code: PX1SNM9O	Standard
PTL-30 SC XX SF3 XX UNVD @ 4000K	OEM SKU# YR-TP350-W30-[P1;P2;M;PM;PN]-C3-[Z1;Z2](4000K) DLC Code: P0HABEIP	Standard
PTL-30 SC XX SF3 XX UNVD @ 5000K	OEM SKU# YR-TP350-W30-[P1;P2;M;PM;PN]-C3-[Z1;Z2](5000K) DLC Code: PCDUUTPD	Standard
PTL-60 SC XX SF3 XX UNVD @ 3000K	OEM SKU# YR-TP350-W60-[P1;P2;M;PM;PN]-C3-[Z1;Z2](3000K) DLC Code: PSD6ZU04	Standard
PTL-60 SC XX SF3 XX UNVD @ 4000K	OEM SKU# YR-TP350-W60-[P1;P2;M;PM;PN]-C3-[Z1;Z2](4000K) DLC Code: P9WBPGYC	Standard
PTL-60 SC XX SF3 XX UNVD @ 5000K	OEM SKU# YR-TP350-W60-[P1;P2;M;PM;PN]-C3-[Z1;Z2](5000K) DLC Code: PJVAT76K	Standard

SENSOR SPEC

Model	Type	Mounting	Coverage	Input	Function	Programmable
SENSOR-PH-PT-U SENSOR-PH-PT-UD SENSOR-PH-PT-HD	-	-	-	Universal 277 ~ 480V	Dusk-to-Dawn Control	-
						
SENSOR-PH-PT-U/UD SENSOR-PH-PT-HD						