

PTL SERIES DECORATIVE POST TOP

Client:
 Project:
 Type:
 Quantity:

CONSTRUCTION

HOUSING + COVER: Hinged die-cast aluminum housing and cover with cupola.
 EPA: 2.015

OPTICS

Injection-molded polycarbonated optic lens available with Type III and V distribution.
 Frosted temper glass allows clarity and resistance to the gradual discoloration that results from exposure to sunlight.

ELECTRICAL

80+ CRI Lumileds available for 5000K CCT.
 Optional CCT Selectable model available - see Ordering Information.
 -40°C up to 45°C* (-40°F up to 113°F) maximum operating temperature.
 L70 @ 105C > 60,000hrs | L70 @ 40C >200,000hrs.
 50/60Hz, <20% THD, 0.9 power factor.
 Driver operates at 120-277V input, 0-10V dimmable driver.
 Optional 347/480V input.

SENSOR (OPTIONAL)

SENSOR-PH-PT-U/UD/HD Twist lock dimming/non-dimming photocontrol.

MOUNTING

Self-aligning pole-top fitter fits 2-3/8" O.D. pole tops or vertical tenons.
 Optional 3", 4" and 5" tenon adapter.

STANDARD FINISH

Corrosion resistant Black powder coating finish.

CUSTOM FINISH

Corrosion resistant Dark Bronze, Graphite Metallic, Gray, Silver, White, Custom RAL#

CERTIFICATION

IP65 Wet location label standard.
 Meets Buy America Act requirements.
 IDA compliant: with 3000K color temperature selection.
 All luminaires are built to UL1598 standards and bear appropriate cETLus labels.
 DLC® (DesignLights Consortium Qualified).

WARRANTY

5 year warranty, see Limited Warranty for additional information.



PTL w/Optional Twist Lock Photocell



SHIPPING DATA

Product	Measurement	Weight
PTL-30	16"L x 16"W x 20"H	28 lb
PTL-60	16"L x 16"W x 20"H	28 lb
PTL-120	16"L x 16"W x 20"H	30 lb





PTL SERIES DECORATIVE POST TOP

ORDER INFORMATION					EXAMPLE: PTL 60 SC T5 SF3 BK UD										
Fixture		Series		Power & LM		CCT		Distribution		Mounting		Finish		Input	
		PTL						5M		SF3				UD	
Accessories Options															
A SERIES															
		PTL		Decorative Post Top											
B POWER & LM															
		Code		Power		LM				Code		Power		LM	
		120		120W		13,800				30		30W		3,300	
										60		60W		6,600	
C CCT															
		40		4000K						SC		Selectable 3000K / 4000K / 5000K			
		50		5000K											
D DISTRIBUTION															
		3M		Type III Medium											
		5M		Type V Medium											
E MOUNTING															
		SF3		Self-aligning pole-top fitter fits 2-3/8" ~ 3" O.D.											
F FINISH															
		Standard													
		BK		Black											
		Custom Color													
		CC		DB		Dark Bronze		GM		Graphite Metallic		GR		Gray	
				SV		Silver		WH		White		RAL#			
G INPUT															
		UD		110-277V, 0-10V Dimmable				HD		347/480V, 1-10V Dimming					
H ACCESSORIES/OPTIONS															
AIA				Assembled in America, compliant with BAA (COTS)											
SENSOR-PH-PT-U / UD / HD*				Twist Lock Photocell / U : 120-277V, UD : 120-277V, HD : 480V input											
SURGE-LSP4-U / H				10kV inline Surge Protection for Universal input / U : 120-277V, H : 480V input											
MOUNT-4SQR-SP-D				4" Tenon Adapter for Round Pole											
MOUNT-5SQR-SP-D				5" Tenon Adapter for Round Pole											
MOUNT-4SQ-SP-D				4" Tenon Adapter for Square Pole											
MOUNT-5SQ-SP-D				5" Tenon Adapter for Square Pole											
*see page 4 for sensor spec															

PTL SERIES DECORATIVE POST TOP

DIMENSIONS

Model	H1	H2	W1	W2
PTL-30 / 60 / 120	24.90" (643mm)	17.55" (445mm)	13.78" (350mm)	ø 3.18" I.D. (76mm)

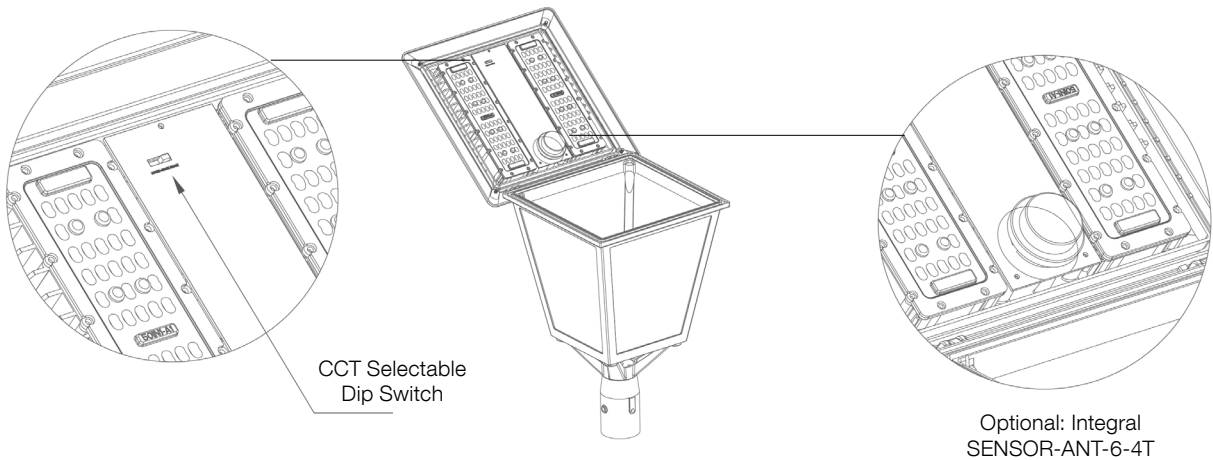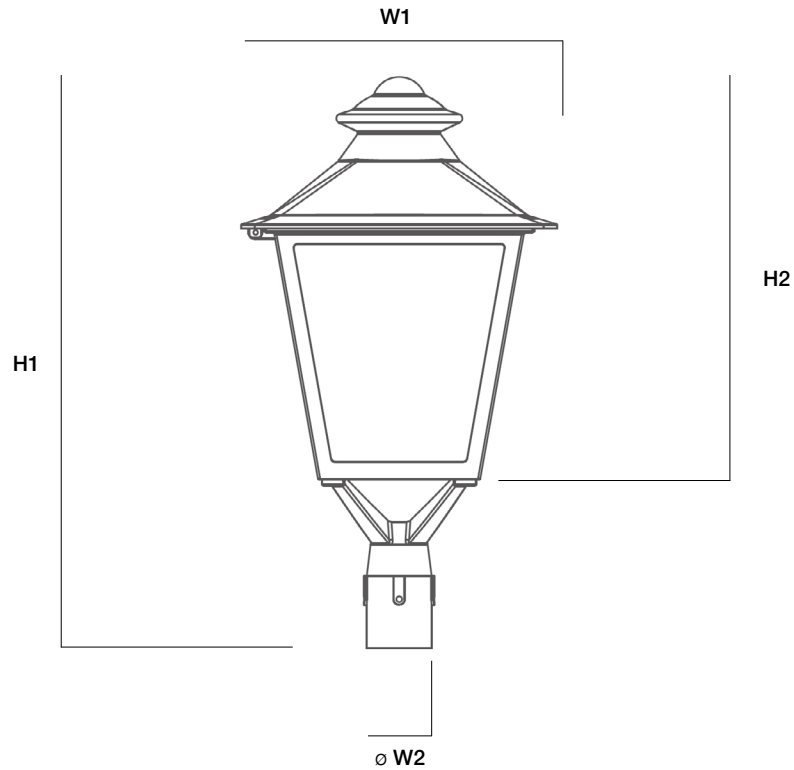

PTL SERIES DECORATIVE POST TOP

DLC CODE

Part Number	DLC Product ID	DLC Class
PTL-30 SC XX SF3 XX UNVD @ 3000K	OEM SKU# YR-TP350-W30-[P1;P2;M;PM;PN]-C3-[Z1;Z2](3000K) DLC Code: PX1SNM9O	Standard
PTL-30 SC XX SF3 XX UNVD @ 4000K	OEM SKU# YR-TP350-W30-[P1;P2;M;PM;PN]-C3-[Z1;Z2](4000K) DLC Code: P0HABEIP	Standard
PTL-30 SC XX SF3 XX UNVD @ 5000K	OEM SKU# YR-TP350-W30-[P1;P2;M;PM;PN]-C3-[Z1;Z2](5000K) DLC Code: PCDUUTPD	Standard
PTL-60 SC XX SF3 XX UNVD @ 3000K	OEM SKU# YR-TP350-W60-[P1;P2;M;PM;PN]-C3-[Z1;Z2](3000K) DLC Code: PSD6ZU04	Standard
PTL-60 SC XX SF3 XX UNVD @ 4000K	OEM SKU# YR-TP350-W60-[P1;P2;M;PM;PN]-C3-[Z1;Z2](4000K) DLC Code: P9WBPGYC	Standard
PTL-60 SC XX SF3 XX UNVD @ 5000K	OEM SKU# YR-TP350-W60-[P1;P2;M;PM;PN]-C3-[Z1;Z2](5000K) DLC Code: PJVAT76K	Standard

SENSOR SPEC

Model	Type	Mounting	Coverage	Input	Function	Programmable
SENSOR-PH-PT-U SENSOR-PH-PT-UD SENSOR-PH-PT-HD	-	-	-	Universal 277 ~ 480V	Dusk-to-Dawn Control	-
						
SENSOR-PH-PT-U/UD SENSOR-PH-PT-HD						