

HBH SERIES HIGH AMBIENT BAY LIGHT

Client:
 Project:
 Type:
 Quantity:

CONSTRUCTION

Single piece die-cast aluminum housing, driver enclosure thermally separated from body, maximizes heat dissipation & air flow.

Unique design allows luminaire to perform and sustain under high ambient temperature applications up to 65°C (149°F).

IP66 rated protection against dust and jets of water.

Suitable for interior/exterior, wet, high pressure hosedown applications.

OPTICS

Custom engineered high-efficient impact resistant and high temperature rating optics providing optimally controlled light distribution.

ELECTRICAL

70+ CRI LED.

-40°C up to 65°C* (-40°F up to 149°F) maximum operating temperature.

Long-life 100,000 hr LED at L70 @ 25°C.

50/60Hz, <20% THD, 0.9 power factor.

Field Selectable Lumen Technology.

Driver operates at 120-277V input, 0-10V dimmable driver, down to 10% with integral 12V AUX 3.5mm sensor receptacle for SENSOR-ANT-6-4T.

Optional 347/480V input.

Optional dimming sensor for occupancy and ambient light level detection.



350W / 410W

SENSORS (OPTIONAL)

SENSOR-ANT-6-4T Plug-N-Play PIR on/off/dimming/photosensing.

SENSOR-BLE-6-4T Integral PIR ALS Control bluetooth/on/off/dimming/photosensing.

MOUNTING

Pendant mount 3/4" conduit entry on top of fixture with snap hook.

Optional 3/4" Pipe Adapter to Pendant Mount Application.

STANDARD FINISH

Corrosion resistant Dark Bronze powder coating finish.

CUSTOM FINISH

Corrosion resistant Black, Graphite Metallic, Gray, Silver, White or custom RAL#.

CERTIFICATION

IP66 Wet location label standard.

Meets Buy America Act requirements.

All luminaires are built to UL1598 standards and bear appropriate cULus labels.

DLC® Premium (DesignLights Consortium Qualified)

WARRANTY

5 year warranty, see Limited Warranty for additional information.

SHIPPING DATA

Product	Measurement	Weight
HBH-350	26"L x 26"W x 8"H	18 lb
HBH-410	26"L x 26"W x 8"H	20 lb



HBH SERIES HIGH AMBIENT BAY LIGHT

ORDER INFORMATION				EXAMPLE : HBH 350 50 C DB UD			
Fixture	Series	Power & LM		CCT	Lens	Finish	Input
	HBH			50	C	DB	
Accessories Options							
A	SERIES						
	HBH	Bay Light - Field Selectable Lumen					
B	POWER & LM						
	CODE	POWER		LM	CODE	POWER	
	350	MAX 350W (up to 55°C)		62,000	410	MAX 410W (up to 55°C)	
		140W High Ambient (up to 65°C)		26,600		164W High Ambient (up to 65°C)	
		210W High Ambient (up to 65°C)		39,000		246W High Ambient (up to 65°C)	
		280W High Ambient (up to 65°C)		51,000		328W High Ambient (up to 55°C)	
		350W High Ambient (up to 55°C)		62,000		410W High Ambient (up to 55°C)	
C	CCT						
	50	5000K					
D	LENS						
	C	Clear					
F	FINISH						
	Standard						
	DB	Dark Bronze					
	Custom Color						
	CC	BK	Black	GM	Graphite Metallic	GR	Gray
		SV	Silver	WH	White	RAL#	
F	INPUT						
	UD	110-277V, 1-10V Dimmable, w/Integral 12V AUX 3.5mm sensor receptacle for SENSOR-ANT-6-4T					
	HD	347V, 480V, 1-10V Dimmable, w/Integral 12V AUX 3.5mm sensor receptacle for SENSOR-ANT-6-4T					
G	ACCESSORIES/OPTIONS						
	AIA	Assembled in America, compliant with BAA (COTS)					
	MOUNT-HB-PIPE-BK	3/4" Pipe Adapter to Pendant Mount Application					
	REMOTE-RC100	Handheld Remote Commissioning Tool for SENSOR-ANT (1 per job)					
	SENSOR-ANT-6-4T*	Integral PIR on/off/dimming/photosensing					
	SENSOR-BLE-6-4T*	"Plug-N-Play" Integral Bluetooth Daylight Harvesting Sensor (ALS Control Mobile App)					
	-CORD	18-3 300V 6 Foot Cord					
	-PLUG	18-3 300V 6 Foot and 3 Prong Plug					
	TWIST-LOCK	Specify Plug Type: L515P / L715P / HBL5929 / L8-20P					


*see page 4 for sensor spec

HBH SERIES HIGH AMBIENT BAY LIGHT


DIMENSIONS

Model	H1	H2	W1	W2
HBH-350 / 410	7.47" (190mm)		ø 24.25" (616mm)	
MOUNT-HB-PIPE-BK		3.15" (80mm)		ø 1.01" (26mm)

Luminaire

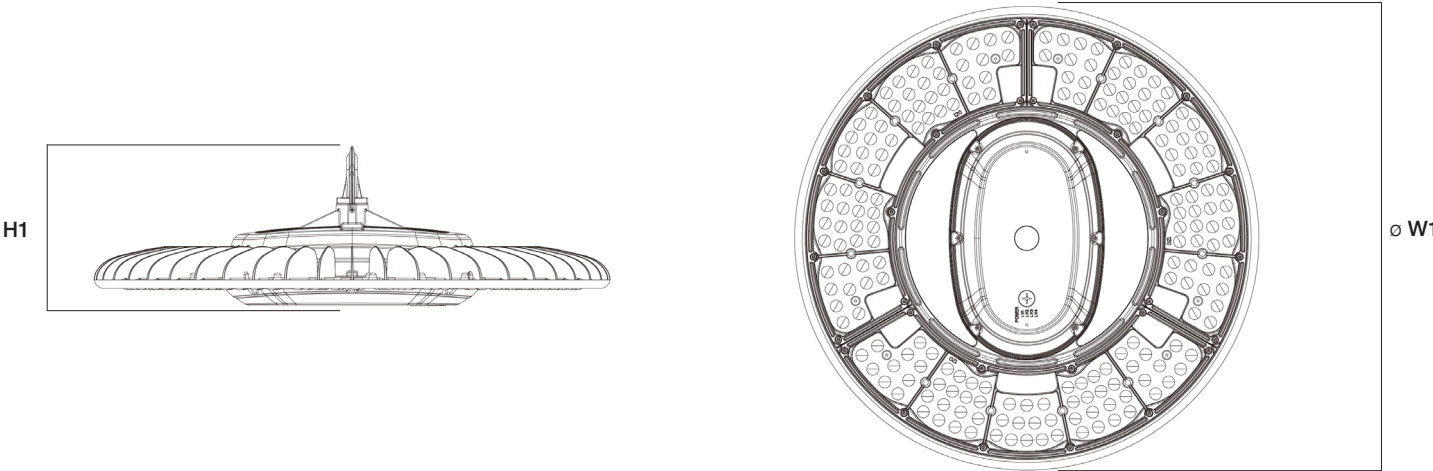

Pipe Adapter

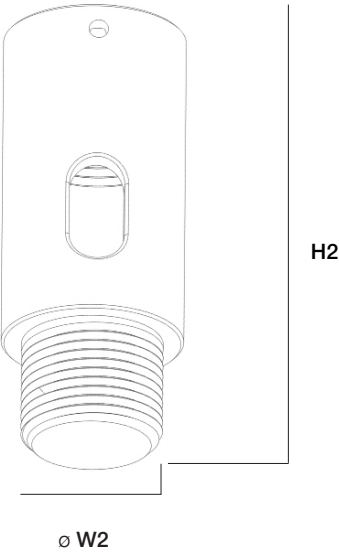

HBH SERIES HIGH AMBIENT BAY LIGHT

PERFORMANCE DATA

SYSTEM WATTS	MAX AMBIENT TEMPERATURE	VOLTAGE	5000K	
			LUMENS	LPW
350W Set @ 140W	65°C	120-277 / 347/480V	26,600	190
350W Set @ 210W	65°C	120-277 / 347/480V	39,000	186
350W Set @ 280W	65°C	120-277 / 347/480V	51,000	182
350W Set @ 350W	55°C	120-277 / 347/480V	62,000	177
410W Set @ 164W	65°C	120-277 / 347/480V	31,000	189
410W Set @ 246W	65°C	120-277 / 347/480V	45,500	185
410W Set @ 328W	55°C	120-277 / 347/480V	59,000	180
410W Set @ 410W	55°C	120-277 / 347/480V	72,000	176

DLC CODE

Part Number	DLC Product ID	DLC Class
HBH-35050C-[DB, BK, WH] [UD,HD][Blank, SENSOR-BLE-619-L3/L4, SENSOR-ANT-6-4T]	S-J0FR6J	Premium
HBH-41050C-[DB, BK, WH] [UD,HD][Blank, SENSOR-BLE-619-L3/L4, SENSOR-ANT-6-4T]	S-2DZS5D	Premium

SENSOR SPEC

Model	Type	Mounting	Coverage	Input	Function	Programmable
SENSOR-ANT-6-4T	PIR	up to 40FT	30FT radius	12V DC	On/Off/Dimming	REMOTE-RC100
SENSOR-BLE-6-4T (see page 5 for detail)	PIR	up to 40FT	30FT radius	12V DC	Bluetooth Mesh On/Off/Dimming Daylight Harvesting	ALS Control Bluetooth Mobile App



SENSOR-ANT-6-4T
 SENSOR-BLE-6-4T

FEATURE


- **Installation:** Plug-N-Play via AUX socket on attached fixture
- **Commissioning:** Wirelessly through ALS Control Mobile App (iOS / Android)
- **Certification:** DLC 5.1 Networked Lighting Control System
- **Control:** Hold time, High-Low setting, continuous Bi-level dimming, Code-compliant manual-on or auto-off capability
- **Sensor:** Motion (Occupancy/Vacancy/Manual) and Daylight Harvesting
- **Room and Zone Control:** Zoning and Grouping control, Scheduling



SPECIFICATIONS

SENSOR TYPE:	Passive Infrared Sensor (PIR)
WIRELESS STANDARDS:	5.0 Bluetooth Mesh
INPUT VOLTAGE:	12-24VDC, >50mA
CONTROL OUTPUT:	0-10V
OPERATING TEMP:	-4°F ~ +140°F (-20°C ~ +60°C)
COMMISSIONING RANGE:	50FT
BLUETOOTH RANGE:	164FT
DETECTION ANGLE:	360°
MOUNTING HEIGHT:	Up to 40FT
WARRANTY:	5 years
IP RATING:	IP65
FACTORY DEFAULT SETTINGS:	100% Brightness for 5 min Dim Down to 30% Hold for 10 min Turn Off

DIMENSIONS

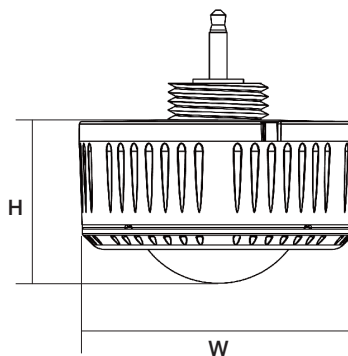

H	W
1.03" (26.2mm)	2.17" (55mm)

COVERAGE PATTERNS

