

ALX SERIES DECORATIVE AREA LIGHT

Client:
Project:
Type:
Quantity:

CONSTRUCTION

Rugged die-cast aluminum housing with a durable powder coat finish provides long-term, reliable performance. Wet location listed.

OPTICS

Low-glare optical design provides comfortable illumination.

Optional amber 590nm turtle-friendly LED.

Optional external half glare shield.

Available with Type II, III, IV, or V light distribution.

Field Selectable CCT from 3000K, 4000K, and 5000K.

ELECTRICAL

80+ CRI LED.

Each model features three field selectable wattage options.

-30°C up to 45°C (-22°F up to 113°F) maximum operating temperature.

50/60Hz, <20% THD, 0.9 power factor.

Driver operates at 120-277V input, 0-10V dimmable driver, down to 0%.

Optional 200-480V input.

SENSORS (OPTIONAL)

SENSOR-SP19L PIR on/off/dimming/photosensing up to 25FT.

SENSOR-PH-PB-X-U Button style photocell.

MOUNTING

Non-adjustable pole mount bracket (SR) suitable for both round and square pole.

Optional wall mount bracket.

STANDARD FINISH

Corrosion resistant Dark Bronze powder coating finish.

CUSTOM FINISH

Corrosion resistant Black, Graphite Metallic, Gray, Silver, White, Custom RAL#.

CERTIFICATION

Wet location label standard.

Meets Buy America Act requirements.

All luminaires are built to UL1598 standards and bear appropriate cETLus labels.

DLC® Premium (DesignLights Consortium Qualified).

WARRANTY

5 year warranty, see Limited Warranty for additional information.



Optional amber 590nm turtle-friendly LED.



ALX SERIES DECORATIVE AREA LIGHT

ORDER INFORMATION				EXAMPLE : ALX 63 SC T3 MOUNT-ALX-SR DB UD			
Fixture	Series	Power & LM	CCT	Distribution	Mounting	Finish	Input
ALX							
Accessories Options							
A	SERIES						
ALX		Decorative Area Light					
B	POWER			B	POWER		
CODE		POWER		CODE		POWER	
63		Field Selectable 33W / 53W / 63W		63A		63W	
125		Field Selectable 76W / 105W / 125W					
C	CCT			C	CCT		
SC		Field Selectable 3000K / 4000K / 5000K		blank		Amber 590nm LED	
D	DISTRIBUTION						
T2		Type II					
T3		Type III					
T4		Type IV					
T5		Type V					
E	MOUNTING						
MOUNT-ALX-SR		Square/Round Pole Non-Adjustable					
MOUNT-ALX-WM		Wall Mount					
F	FINISH						
Standard							
DB		Dark Bronze					
Custom Color							
CC		BK	Black	GM	Graphite Metallic	GR	Gray
		SV	Silver	WH	White	RAL#	
G	INPUT						
UD		120-277V, 0-10V Dimming, Down to 0%					
HD		200-480V, 0-10V Dimming, Down to 0%					
H	ACCESSORIES/OPTIONS						
BAA		Assembled in America, compliant with BAA (COTS)					
SHIELD		Glare Shield for ALX					
SENSOR-SP19L*		PIR on/off/dimming/photosensing up to 25FT MH					
SENSOR-PH-PB-X-U*		Button Style Photocell for CPX					
REMOTE-HD06R		Handheld Remote Commissioning Tool for SENSOR-SP19L					
EMB-9W-Y*		90-Minute Emergency Battery 9W 100-347VAC Input 300VDC Output					
*see page 5 for sensor and EMB spec							



ALX SERIES DECORATIVE AREA LIGHT

DIMENSIONS

Model	W1	W2	W3	H1	H2	H3
ALX-63 / -125						
MOUNT-ALX-SR	ø 16.77" (426mm)	23.92" (608mm)	18.34" (466mm)	5.67" (144mm)	3.39" (86mm)	-
ALX-63 / -125						
MOUNT-ALX-WM	ø 16.77" (426mm)	20.76" (527mm)	18.34" (466mm)	5.08" (129mm)	3.39" (86mm)	7.94" (202mm)

MOUNT-ALX-SR



Square/Round Pole Non-Adjustable

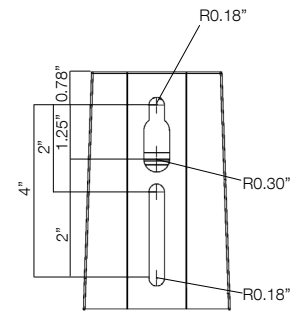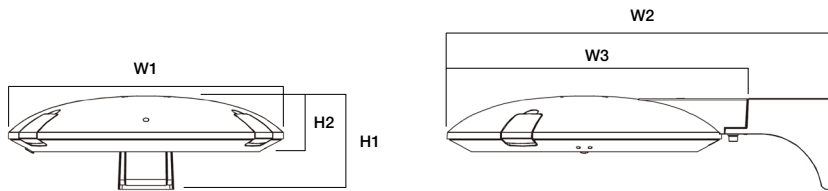

Bracket

MOUNT-ALX-WM


Wall Mount

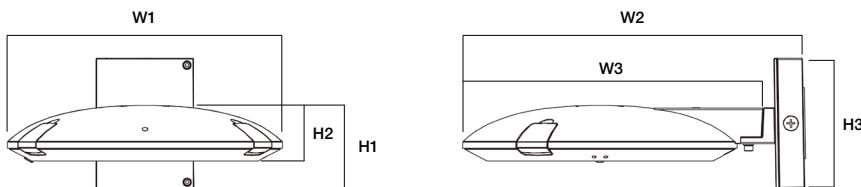

Bracket

SHIELD

Glare Shield

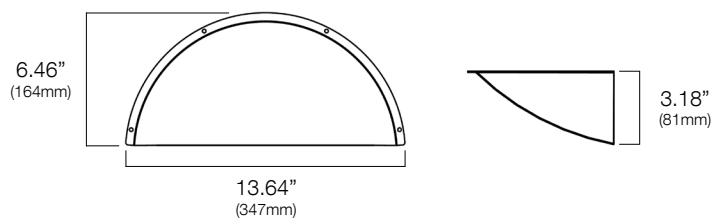

ALX SERIES DECORATIVE AREA LIGHT

PERFORMANCE DATA

MODEL	SYSTEM WATTS	DISTRIBUTION	3000K		4000K		5000K	
			LUMENS	LPW	LUMENS	LPW	LUMENS	LPW
ALX-63	63W	T2	9350	146	10200	164	9800	153
	53W		8050	152	9050	171	8450	160
	33W		5400	163	6050	183	5650	171
ALX-63	63W	T3	9550	148	10300	165	9950	154
	53W		8100	153	9050	170	8450	159
	33W		5400	164	6050	182	5650	170
ALX-63	63W	T4	9400	147	10250	165	9900	153
	53W		8050	152	9050	170	8400	158
	33W		5350	163	6050	182	5600	169
ALX-63	63W	T5	9400	147	10395	165	9850	154
	53W		8050	152	9050	170	8427	159
	33W		5350	163	6050	182	5610	170
ALX-125	125W	T2	18250	146	20500	164	19100	153
	105W		16590	158	18690	178	17430	166
	76W		12616	166	14136	186	13224	174
ALX-125	125W	T3	18450	148	20600	165	19250	154
	105W		16800	160	18795	179	17535	167
	76W		12768	168	14288	188	13300	175
ALX-125	125W	T4	18350	147	20600	165	19100	153
	105W		16695	159	18795	179	17430	166
	76W		12692	167	14288	188	13224	174
ALX-125	125W	T5	18350	147	20650	165	19200	154
	105W		16695	159	18795	179	17500	167
	76W		12692	167	14288	188	13300	175

ALX SERIES DECORATIVE AREA LIGHT

SENSOR SPEC

Model	Type	Mounting	Coverage	Input	Function	Programmable
SENSOR-SP19L (see page 6 for detail)	PIR	25FT	23FT radius	10.5 ~ 15V DC	On/Off/Dimming Daylight Harvesting	REMOTE-HD06R
SENSOR-PH-PB-X-U	-	-	-	100-277VAC	Dusk-to-Dawn Control	-




SENSOR-SP19L



SENSOR-PH-PB-X-U

EMB SPEC

Model	Battery Capacity	Input	Output	Output Power	Operating Temp	Installation
EMB-9W-Y	90mins	100-347VAC	300VDC	9w	0°C ~ 60°C 32°F ~ 140°F	Factory or Field Install

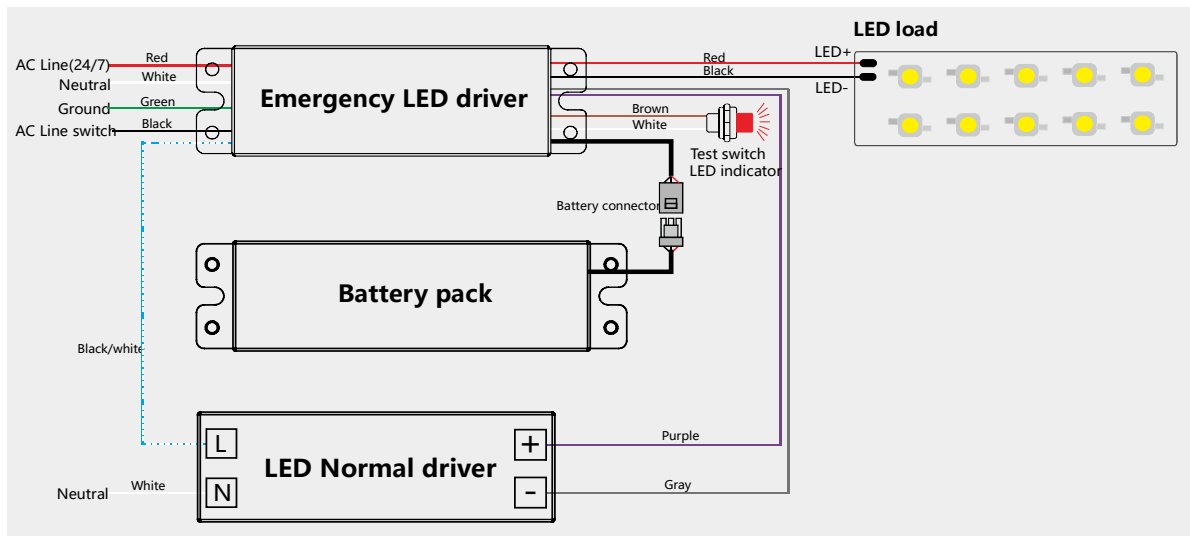

FEATURE

- **Installation:** Factory or Field Installation
- **Commissioning:** through REMOTE-HD06R
- **Control:** Hold time, Standby period, Standby dimming level, Daylight threshold, Detection area, Daylight Harvesting, Automatic On/Off
- **Sensor:** PIR Sensor
- **Factory Default:** 100% Detection Area / Hold Time: 5s / Daylight Threshold: Disable / Standby Dimming Level: 10% / Standby Period: 0s





SPECIFICATIONS

SENSOR TYPE: Passive Infrared Sensor (PIR)
INPUT VOLTAGE: 10.5-15VDC
LIGHT-CONTROL: 2 / 10 / 30 / 50 / 80 / 120 / 200 / 250 / 300 / 350 / 400 Lux / Disable
CONTROL OUTPUT: 0-10V Dimming
OPERATING TEMP: -13°F to +140°F (-25°C to +60°C)



COMMISSIONING RANGE: -
TIME SETTING: 5sec ~ 30min (adjustable)
DETECTION RANGE: 25% / 50% / 75% / 100%
MOUNTING HEIGHT: Up to 25FT
WARRANTY: 5 years
IP RATING: IP65

DIMENSIONS




W1	W2	H1	H2
Ø 1.55" (40mm)	0.79" (20mm)	1.47" (38mm)	0.29" (8mm)

COVERAGE PATTERNS

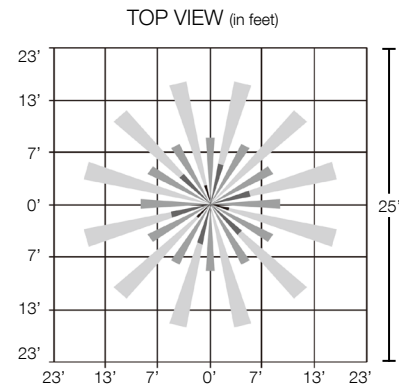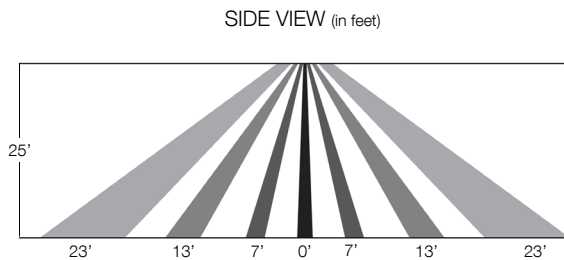

WIRING DIAGRAM

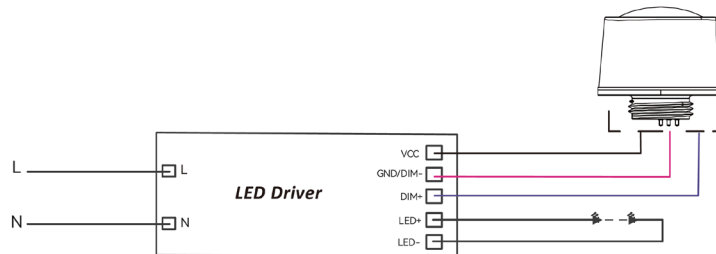

ORDER CODES

SENSOR-SP19L PIR on/off/dimming/photosensing up to 25FT MH