

## SENSOR-PH-RP TWIST-LOCK RECEPTACLE

Client:  
Project:  
Type:  
Quantity:




### FEATURE

- **Installation:** Factory Install - Integral to Fixture
- **Control:** Hold time, High-Low setting, continuous Bi-level dimming, manual/auto - on/off
- **Sensor:** Dusk-to-Dawn Control


### SPECIFICATIONS

<b>SENSOR TYPE:</b>	Twist-Lock 7-Pin Receptacle
<b>INPUT VOLTAGE:</b>	0~480VAC
<b>OPERATING TEMP:</b>	-40°F ~ +158°F (-40°C ~ +70°C)
<b>RATED FREQUENCY:</b>	50/60Hz
<b>RATED LOADING:</b>	15Amp
<b>LEAD:</b>	16AWG, 14AWG
<b>SIGNAL CONTROL:</b>	0-30VDC, 250mA MAX
<b>RELATIVE HUMIDITY:</b>	96%
<b>WARRANTY:</b>	5 years

### DIMENSIONS

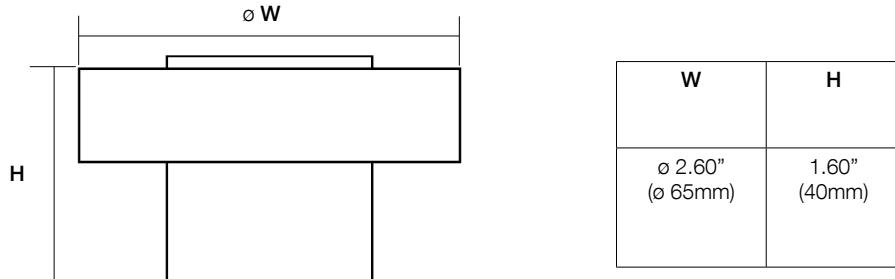

### WIRING DIAGRAM

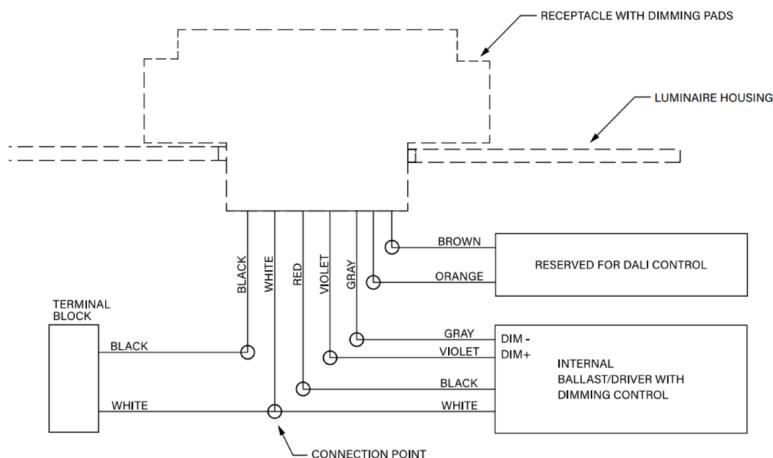

### ORDER CODES

SENSOR-PH-RP-H	Twist-Lock 3-Pin (Wet) Photocell
SENSOR-PH-RP-HD	Twist-Lock 7-Pin (Wet) Photocell

