

## CPA SERIES SELECTABLE GARAGE LIGHT

Client:  
Project:  
Type:  
Quantity:

### CONSTRUCTION

Rugged die-cast aluminum housing with corrosion resistant powder coat finish both protects and provides architectural appearance.

Heat dissipating fins provide superior thermal performance extending the life of the luminaire.

Feed-through wiring ready, 1/2" NPT threading with water tight cap.

### OPTICS

Type V Distribution

Lightly diffused lens for reduced LED pixelation and glare.

### ELECTRICAL

80+ CRI Lumileds LED.

-40°C up to 40°C (-40°F up to 104°F) maximum operating temperature

160,000 hr at L70 @ 25°C, 155,000 hr at L70 40°C.

Driver operates at 120-277V input, 50/60Hz, 1-10V dimming driver standard. Option to have dimming leads pulled out for easy connection.

<20% THD, 0.9 power factor.

Optional 10kV surge protector.

Optional Emergency Backup Battery.\*

### SENSORS (OPTIONAL)

SENSOR-PH-PB-U Integral Button Style Photocell.

SENSOR-ANT-7D Integral Microwave Motion/on/off/dimming/photosensing.

SENSOR-BLE-7D Integral Microwave Bluetooth Bi-Level Dimming Sensor.

CONTROL-BLE-SK104-PH ALS Control Bluetooth Fixture Controller.

CONTROL-LVFA AVI-ON Bluetooth Mesh Controller.

### MOUNTING

3/4" conduit entry on top for pendant mount

1/2" conduit entry on three sides

Surface Mount plate for mounting on 3" - 4" electrical box

### STANDARD FINISH

Corrosion resistant Dark Bronze and White powder coating finish.

### CUSTOM FINISH

Corrosion resistant Black, Graphite Metallic, Gray, Silver, or custom RAL#.

### CERTIFICATION

IP66 Wet location label standard.

Meets Buy America Act requirements.

All luminaires are built to UL1598 standards and bear appropriate cULus labels.

For Emergency application, equipment with UL924 certified battery packs.

### WARRANTY

5 year warranty, see Limited Warranty for additional information.



Dark Bronze Finish



White Finish

### SHIPPING DATA

Product	Measurement	Weight
CPA-60	11"L x 11"W x 4"H	5.6 lb
CPA-110	13"L x 13"W x 4"H	6.5 lb



## CPA SERIES SELECTABLE GARAGE LIGHT

ORDER INFORMATION					EXAMPLE : CPA 40 50 PL JM DB UD			
Fixture	Series	Power & LM	CCT	Distribution	Mounting	Finish	Input	
	CPA		SC	PL	JM			
A	SERIES							
	CPA	Garage Light Selectable						
B	POWER & LM							
	Code	Power	LM					
	60	Field Selectable 24 / 36 / 47 / 60W		8,000lm				
	110	Field Selectable 41 / 63 / 85 / 110W		16,000lm				
C	CCT							
	SC	Field Selectable 3000 / 4000 / 5000K						
D	DISTRIBUTION							
	PL	Prismatic Lens						
E	MOUNTING							
	JM	Surface Mount (3/4" conduit entry on top)						
F	FINISH							
	Standard							
	DB	Dark Bronze		WH	White			
	Custom Color							
	CC	BK	Black	GM	Graphite Metallic		GR	Gray
		SV	Silver	RAL#				
G	INPUT							
	U	110-277V						
	UD	110-277V, 0-10V Dimmable						

## CPA SERIES SELECTABLE GARAGE LIGHT

### ORDER INFORMATION (CONTINUED)

#### Accessories Options

#### H ACCESSORIES/OPTIONS

<b>AIA</b>	Assembled in America, compliant with BAA (COTS)
<b>BABAA</b>	Build America, Buy America Act (BABAA) Compliant
<b>EMB-CPBOX-8W-MST**</b>	External battery enclosure with 8W Emergency Battery
<b>SENSOR-PH-PB-U*</b>	Button Style Photocell
<b>SENSOR-ANT-7D*</b>	Integral Microwave Motion/on/off/dimming/photosensing
<b>SENSOR-BLE-7D*</b>	Integral Microwave Bluetooth Bi-Level Dimming Sensor
<b>CONTROL-BLE-SK104-PH*</b>	Integral Bluetooth Fixture Controller w/Button Photocell (ALS Control Mobile App)
<b>CONTROL-LVFA*</b>	AVI-ON Bluetooth Mesh Control System
<b>SURGE-LSP4-U</b>	10kV inline Surge Protection for Universal input
<b>REMOTE-RC100</b>	Handheld Remote Commissioning Tool for SENSOR-819-D1/D2 Only, ANT Series



\*see page 7 for sensor spec

\*\*see page 8 for emb spec

## CPA SERIES SELECTABLE GARAGE LIGHT

### DIMENSIONS


Power	L	W	H
CPA-60	9.57" (243mm)	9.57" (243mm)	3.07" (78mm)
CPA-110	11.52" (293mm)	11.52" (293mm)	3.80" (97mm)

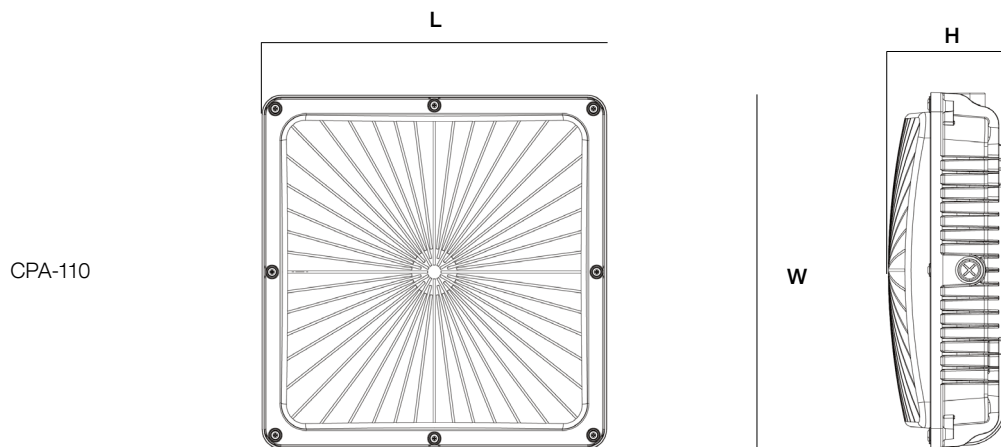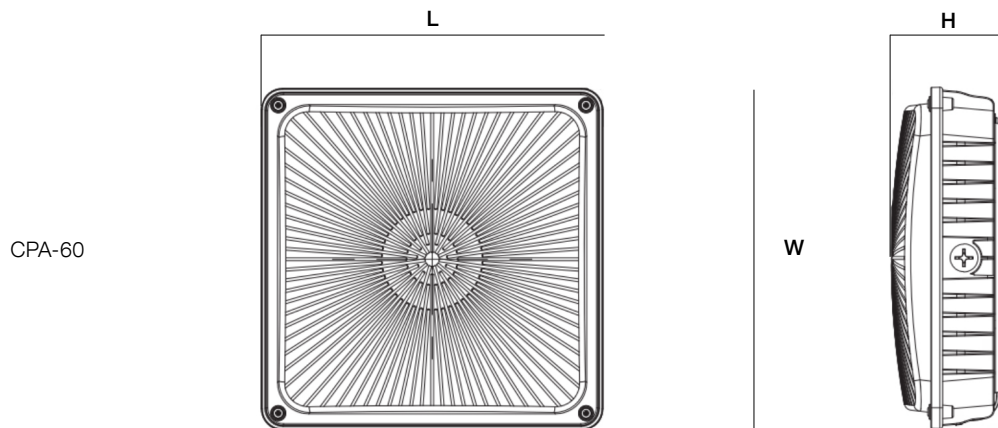


## CPA SERIES SELECTABLE GARAGE LIGHT

### DIMENSIONS



	L	W	H
EMB-CPBOX-8W-MST	6.4" (163mm)	6.4" (163mm)	2.73" (69mm)

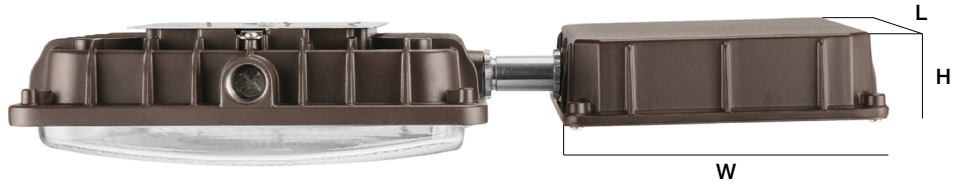

### MOUNTING OPTIONS

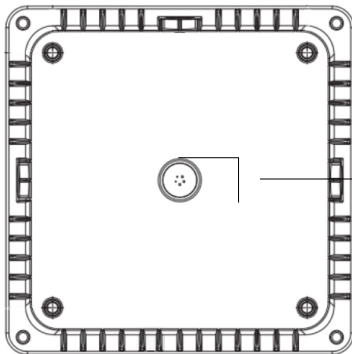

3/4" conduit entry on top for pendant mount

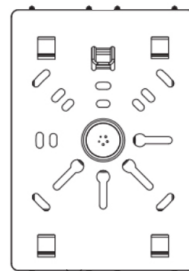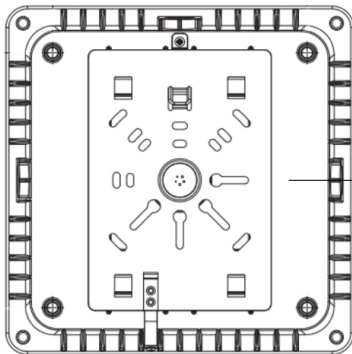

Surface Mount Plate  
 For direct mounting with electrical box

## CPA SERIES SELECTABLE GARAGE LIGHT

### PERFORMANCE DATA

MODEL	VOLTAGE	WATTAGE	3000K		4000K		5000K		QTY ON PALLET
			LUMENS	LPW	LUMENS	LPW	LUMENS	LPW	
CPA-60	120-277V	24W	3700	154	4000	167	3800	158	180
	120-277V	36W	5200	144	5600	156	5300	147	180
	120-277V	47W	6500	138	7000	149	6600	140	180
	120-277V	60W	7800	130	8400	140	8000	133	180
CPA-110	120-277V	41W	6800	166	7200	176	7000	171	144
	120-277V	63W	9800	156	10500	167	10000	159	144
	120-277V	85W	12800	151	13600	160	13000	153	144
	120-277V	110W	15500	141	16500	150	16000	145	144

### DLC CODE

Part Number	DLC Product ID	DLC Class
CPA-60SC-XX-UD	S-CYFP7D	Premium
CPA-110SC-XX-UD	S-WCQVN1	Premium

## CPA SERIES SELECTABLE GARAGE LIGHT

### SENSOR SPEC

Model	Type	Mounting	Coverage	Input	Function	Programmable
SENSOR-PH-PB-U	-	-	-	Universal	Dusk-to-Dawn Control	-
CONTROL-LVFA (see page 9 for detail)	Fixture Controller	-	-	12V DC	Bluetooth Mesh On/Off/Dimming Scheduling	AVI-ON Bluetooth Mobile App
CONTROL-BLE-SK104-PH (see page 10 for detail)	Fixture Controller	-	-	12V DC	Bluetooth Mesh On/Off/Dimming Scheduling CCT Tuning	ALS Control Bluetooth Mobile App
SENSOR-BLE-7D (see page 12 for detail)	Microwave	up to 12FT	17FT radius	10V DC	Bluetooth Mesh Bi-Level Dimming Motion	ALS Control Bluetooth Mobile App
SENSOR-ANT-7D (see page 13 for detail)	Microwave	up to 12FT	17FT radius	10V DC	On/Off/Dimming Motion Daylight Sensing	REMOTE-RC100



SENSOR-PH-PB-U



CONTROL-LVFA



CONTROL-BLE-SK104-PH




SENSOR-ANT-7D  
SENSOR-BLE-7D

## CPA SERIES SELECTABLE GARAGE LIGHT

# EMB SPEC

Model	Battery Capacity	Input	Output	Output Power	Operating Temp	Installation
EMB-CPBOX-8W-MST	90mins	100-347VAC	170VDC	8W	0°C ~ 50°C 32°F ~ 122°F	Field Install Factory Install

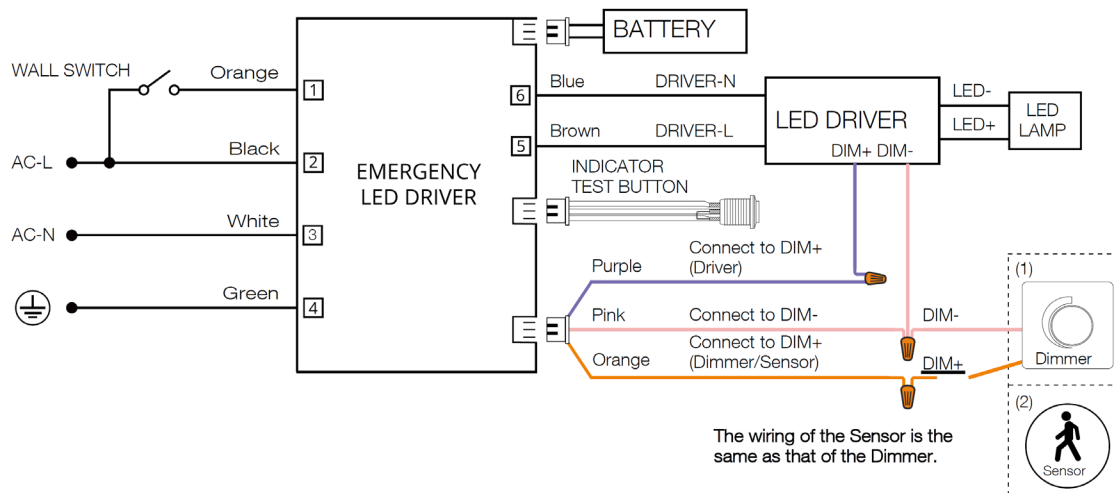

## CPA SERIES SELECTABLE GARAGE LIGHT

### CONTROL-LVFA SPEC

#### Status LEDs & Config Button


Quick and easy validation of wiring and network

#### Direct Connect™ Sensor Port

Simple and cost-effective addition to Avi-on sensors

#### Terminal Blocks & Mounting Tabs

Faster, easier and lower cost installation eliminating connectors

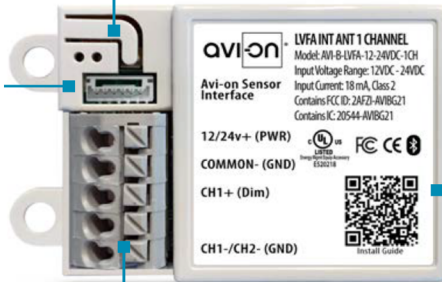

#### Internal Antenna

Improved performance and eliminates risk of accidentally cutting a hanging wire


### SPECIFICATIONS

**INPUT VOLTAGE:** 12-24VDC  
**CURRENT:** 15mA without a Sensor  
 19mA with a DC PIR Sensor  
 48mA with a DC Microwave Sensor  
**0-10V DIMMING:** 12-24VDC  
**SIZE:** 2.30in x 1.43in x 0.75in  
 (58.2mm x 36.4mm x 19mm)  
**MOUNTING:** Removable mounting tabs  
**WEIGHT:** 0.45 oz (16g)  
**OPERATING TEMP:** -22°F to +158°F (-30°C to + 70°C)


**RADIO FREQUENCY:** 2.4GHz  
**WIRELESS STANDARD:** BLE 4.2 with Mesh  
**POINT TO POINT RANGE\*:** 80ft with obstructions  
 350ft unobstructed  
**SECURITY:** AES 128-bit encryption for device to device communication  
 AES 256-bit encryption for device to cloud communication  
**WARRANTY:** 5 years; 10 years optional  
**REGULATORY:** FCC: 2AFZI-AVI1010 B  
 IC: 20544-AVI1010 B  
 BQB: D031801, DID: 86303  
 UL 916, 2043 (Plenum Rated)

\*When communicating through the mesh, range is essentially unlimited (5000ft+)

### WIRING DIAGRAM

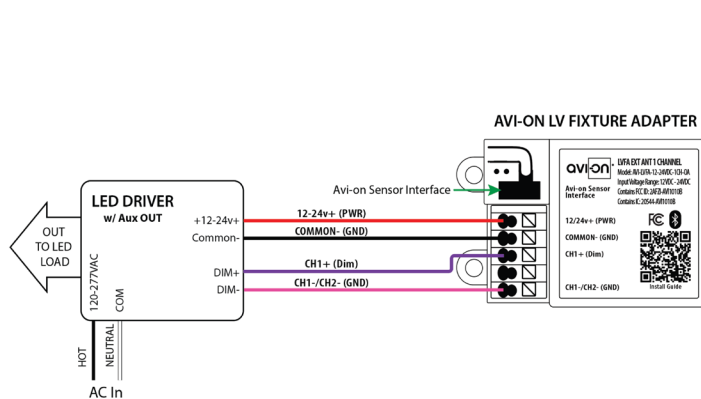

Fixture adapter powered by LED driver auxiliary output

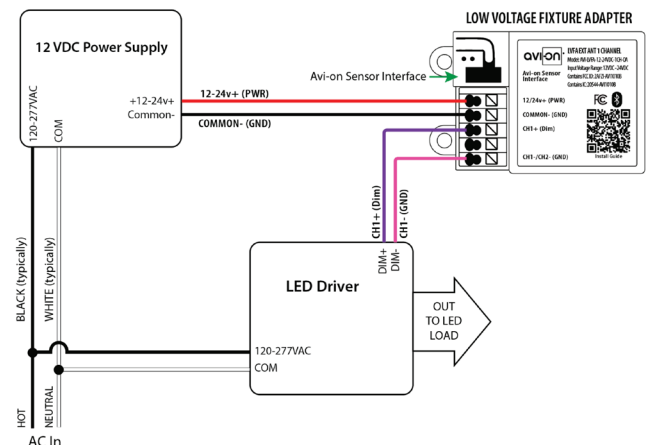

Fixture adapter connected to LED driver and using power supply

### FEATURE


- **Installation:** Factory / Jobsite install through 1/2" knockout hole, 12V AUX power required
- **Commissioning:** Wirelessly through ALS Control Mobile App (iOS / Android)
- **Certification:** DLC 5.1 Networked Lighting Control System
- **Control:** High-End Trim, Zoning, Continuous Bi-level Dimming
- **CCT Tuning:** CCT Tuning feature for Dual/Multi-CCT LED board fixture only
- **Sensor:** Photocell
- **Zone Control:** Zoning and Grouping control, Scheduling



### SPECIFICATIONS


<b>SENSOR TYPE:</b>	Photocell
<b>WIRELESS STANDARDS:</b>	5.0 Bluetooth Mesh
<b>INPUT VOLTAGE:</b>	12-14VDC, >50mA
<b>CONTROL OUTPUT:</b>	0-10V
<b>OPERATING TEMP:</b>	-40°F ~ +158°F (-40°C ~ +70°C)
<b>COMMISSIONING RANGE:</b>	50FT
<b>BLUETOOTH RANGE:</b>	100FT
<b>DETECTION ANGLE:</b>	360°
<b>WARRANTY:</b>	5 years
<b>IP RATING:</b>	IP65

### DIMENSIONS

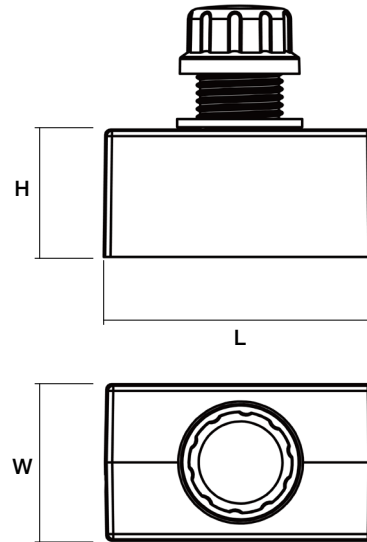

L	H	W
1.14" (29mm)	0.94" (24mm)	1.97" (50mm)

### WIRING DIAGRAM

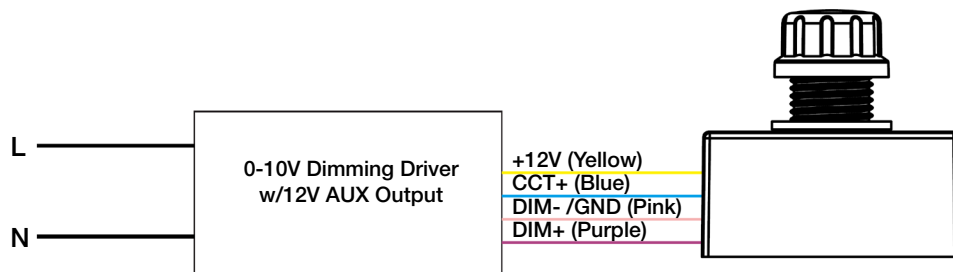

### FEATURE

- **Installation:** Factory or Field Install End Mount to Fixture
- **Commissioning:** Wirelessly through ALS Control Mobile App (iOS / Android)
- **Certification:** DLC 5.1 Networked Lighting Control System
- **Control:** Hold time, High-Low setting, continuous Bi-level dimming, Code-compliant manual-on or auto-off capability
- **Sensor:** Motion (Occupancy/Vacancy/Manual) and Daylight Harvesting
- **Room and Zone Control:** Zoning and Grouping control, Scheduling




### SPECIFICATIONS

**SENSOR TYPE:** Passive Infrared Sensor (PIR)  
**WIRELESS STANDARDS:** Bluetooth SIG Mesh  
**INPUT VOLTAGE:** 120/277VAC  
**CONTROL OUTPUT:** 0-10V  
**OPERATING TEMP:** -40°F ~ +167°F (-40°C ~ +75°C)



**COMMISSIONING RANGE:** 50FT  
**BLUETOOTH RANGE:** Integral antenna up to 100FT  
**DETECTION ANGLE:** Vertical 90° x Horizontal 360°  
**MOUNTING HEIGHT:** 8 - 40FT  
**WARRANTY:** 5 years  
**IP RATING:** IP20 Damp

### DIMENSIONS

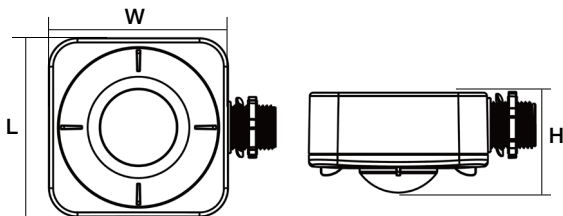

L	W	H
3.19" (81mm)	4.02" (102mm)	1.70" (43.3mm)

### COVERAGE PATTERNS

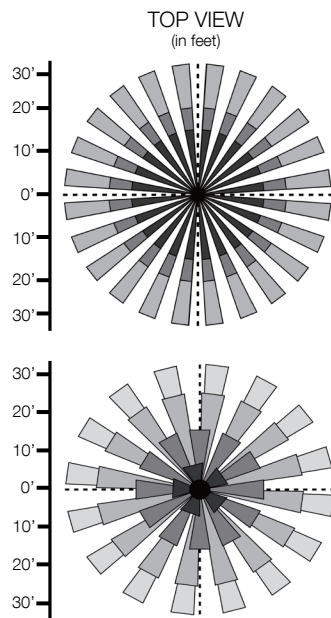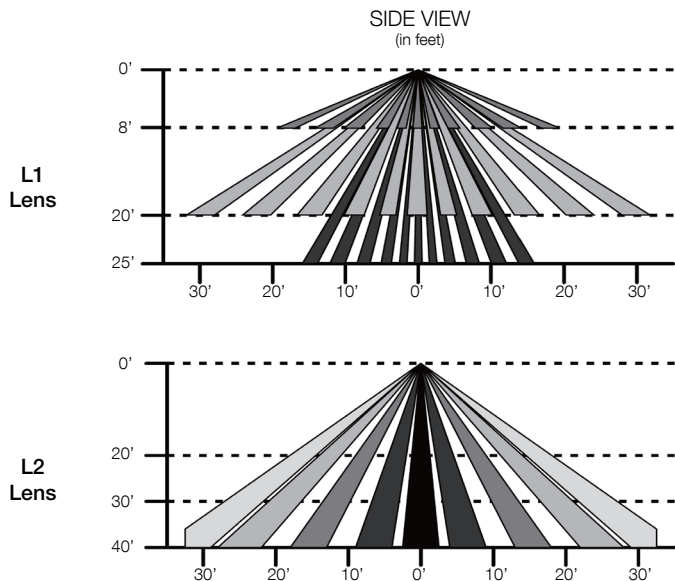

## SENSOR-BLE-7D BLUETOOTH MICROWAVE SENSOR

### FEATURE

- **Installation:** Factory Install - Integral to Fixture
- **Commissioning:** Wirelessly through ALS Control Mobile App (iOS / Android)
- **Certification:** DLC 5.1 Networked Lighting Control System
- **Control:** Hold time, High-Low setting, continuous Bi-level dimming, Code-compliant manual-on or auto-off capability
- **Sensor:** Motion (Occupancy/Vacancy/Manual)
- **Room and Zone Control:** Zoning and Grouping control, Scheduling




### SPECIFICATIONS

**SENSOR TYPE:** Microwave  
**WIRELESS STANDARDS:** Bluetooth SIG Mesh  
**INPUT VOLTAGE:** 10-14VDC, >50mA  
**CONTROL OUTPUT:** 0-10V  
**OPERATING TEMP:** -40°F ~ +158°F (-40°C ~ +70°C)


**COMMISSIONING RANGE:** 50FT  
**BLUETOOTH RANGE:** Integral antenna up to 164FT  
**DETECTION ANGLE:** 360°  
**MOUNTING HEIGHT:** Up to 12FT  
**WARRANTY:** 5 years  
**IP RATING:** IP20

### DIMENSIONS

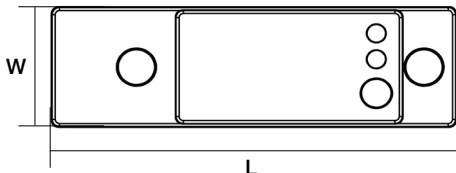


L	W
2.6" (65.5mm)	0.8" (20.5mm)


### COVERAGE PATTERNS

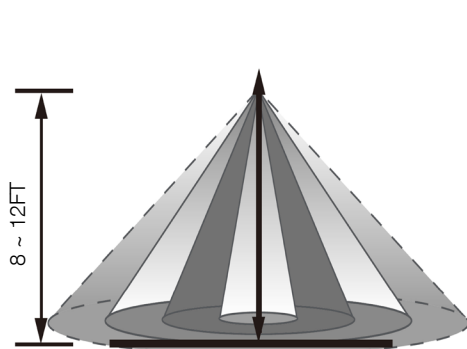

Height of Installation 8 ~12FT

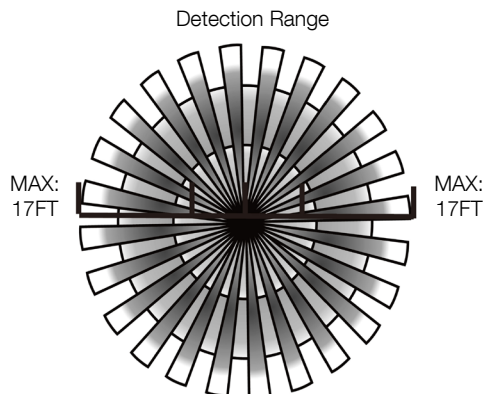

Height of Installation 8FT

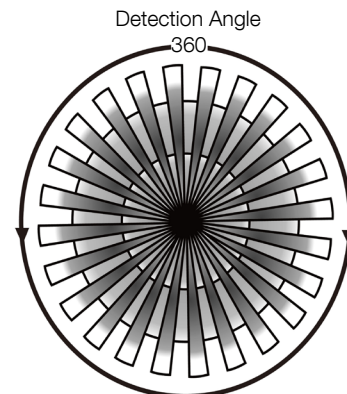

## SENSOR-ANT-7D MICROWAVE SENSOR

### FEATURE

- **Installation:** Factory Install - Integral to Fixture
- **Commissioning:** through Remote Control
- **Control:** Hold time, High-Low setting, Continuous Bi-Level Dimming, Code-Compliant Manual-On or Auto-Off Capability
- **Sensor:** Motion (Occupancy/Vacancy/Manual)




### SPECIFICATIONS

<b>SENSOR TYPE:</b>	Microwave
<b>INPUT VOLTAGE:</b>	12-24VDC, >50mA
<b>LIGHT-CONTROL:</b>	10 ~ 50LUX
<b>CONTROL OUTPUT:</b>	0-10V
<b>OPERATING TEMP:</b>	-40°F ~ +158°F (-40°C ~ +70°C)


<b>COMMISSIONING RANGE:</b>	50FT from Remote Control
<b>TIME SETTING:</b>	10sec ~ 60min (adjustable)
<b>DETECTION ANGLE:</b>	360°
<b>MOUNTING HEIGHT:</b>	Up to 12FT
<b>WARRANTY:</b>	5 years
<b>IP RATING:</b>	IP20

### DIMENSIONS

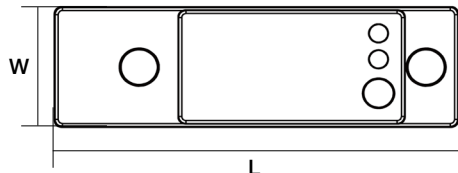


L	W
2.6" (65.5mm)	0.8" (20.5mm)

### COVERAGE PATTERNS

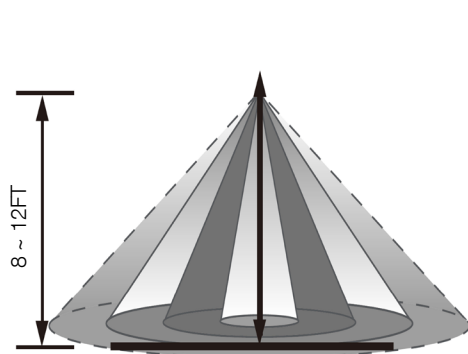

Height of Installation 8 ~12FT

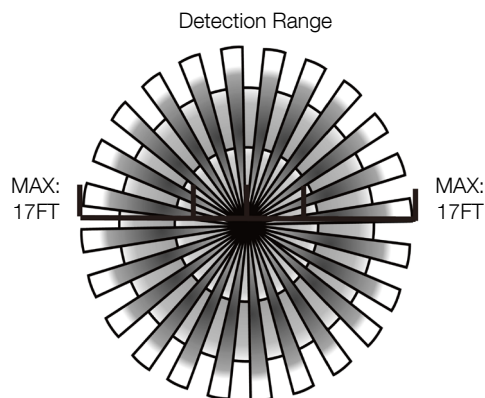

Height of Installation 8FT

