

WRA SERIES HALF DOME WALL PACK

Client:
Project:
Type:
Quantity:

CONSTRUCTION

Die-cast aluminum housing provides durable, high-quality construction and is designed for effective heat dissipation to support reliable LED operation and long service life. Fixture is IP65 rated for wet-location outdoor applications.

OPTICS

UV-stabilized polycarbonate lens provides durable optical protection. Field-selectable optical distribution with Type II, Type III, or Type IV patterns (T2/T3/T4) adjustable. CCT and output selectable between 3000K ~ 5000K via DIP switch configuration.

ELECTRICAL

80+ CRI Lumileds LED.
-40°C up to 45°C (-40°F up to 113°F) maximum operating temperature.
150,000hr LED at L70 @ 25°C, 120,000hr LED at L70 @ 40°C.
Driver operates at 120-277V input, 50/60Hz, <15% THD, 0.9 power factor >90%.
0-10V dimming driver, button photocontrol standard included.
Three adjustable Wattage levels available for each model.
Optional 10kV surge protector.
Optional Self-Diagnostic emergency back up.

SENSORS (OPTIONAL)

CONTROL-BLE-SK104-PH I Integral Bluetooth Fixture Controller w/ Button
Photocell (ALS Control Mobile App)
CONTROL-LVFA AVI-ON Bluetooth Mesh Controller.

MOUNTING

Wall mount over electrical box or via surface conduit.

STANDARD FINISH

Corrosion resistant Dark Bronze powder coating finish.

CUSTOM FINISH

Black, Graphite Metallic, Gray, Silver, and White, or custom RAL#

CERTIFICATION

IP65 Wet Location listed.
Meets Buy America Act requirements.
All luminaires are built to UL1598 standards and bear appropriate cULus labels.
For Emergency application, equipped with UL924 certified battery packs.
DLC® Premium (DesignLights Consortium Qualified) listed.

WARRANTY

5 year warranty, see Limited Warranty for additional information.




WRA SERIES HALF DOME WALL PACK

ORDER INFORMATION					EXAMPLE: WRA 80 SC DB UNLV P		
Fixture	Series	Power & LM	CCT	Distribution	Finish	Input	Sensor
	WRA		SC	FA			P
Accessories Options							
A	SERIES						
	WRA	Half Dome Wall Pack					
B	POWER & LM						
	Code	Power	LM				
	40	Field Selectable 24W / 32W / 40W		3,825lm ~ 6,587lm			
	80	Field Selectable 48W / 64W / 80W		6,480lm ~ 13,052lm			
C	CCT						
	SC	Field Selectable: 3000K / 4000K / 5000K					
D	DISTRIBUTION						
	FA	Field Selectable Distribution: Type II / Type III / Type IV					
E	FINISH						
	Standard						
	DB	Dark Bronze					
	Custom Color						
	CC	BK	Black	GM	Graphite Metallic	GR	Gray
		SV	Silver	WH	White	RAL#	
F	INPUT						
	UNVD-P	120-277V, 0-10V Dimming, with Photocell					
	HVLD-P	347-480V, 0-10V Dimming, with Photocell					
G	ACCESSORIES/OPTIONS						
	BAA	Assembled in America, compliant with BAA (COTS)					
	SURGE-LSP4-U / H	10kV inline Surge Protection for Universal input / U : 120-277V, H : 480V input					
	CONTROL-BLE-SK104-PH*	Integral Bluetooth Fixture Controller w/Button Photocell (ALS Control Mobile App)					
	CONTROL-LVFA*	AVI-ON Bluetooth Mesh Control System					
	EMB-8W-Y-C**	90-Minute Self-Diagnostic Emergency Battery 8W 100-347VAC Input 300VDC Output -20°C-60°C (-4°-140°F) (for WRA-40)					
	EMB-9W-Y**	90-Minute Self-Diagnostic Emergency Battery 9W 100-347VAC Input 300VDC Output (for WRA-40)					
	*see page 5 for sensor spec						
	**see page 6 for emb spec						


WRA SERIES HALF DOME WALL PACK

DIMENSIONS

Model	L	W	H1	H2
WRA-40 / -80	6.89" (175mm)	13" (330mm)	6.49" (165mm)	1.37" (35mm)

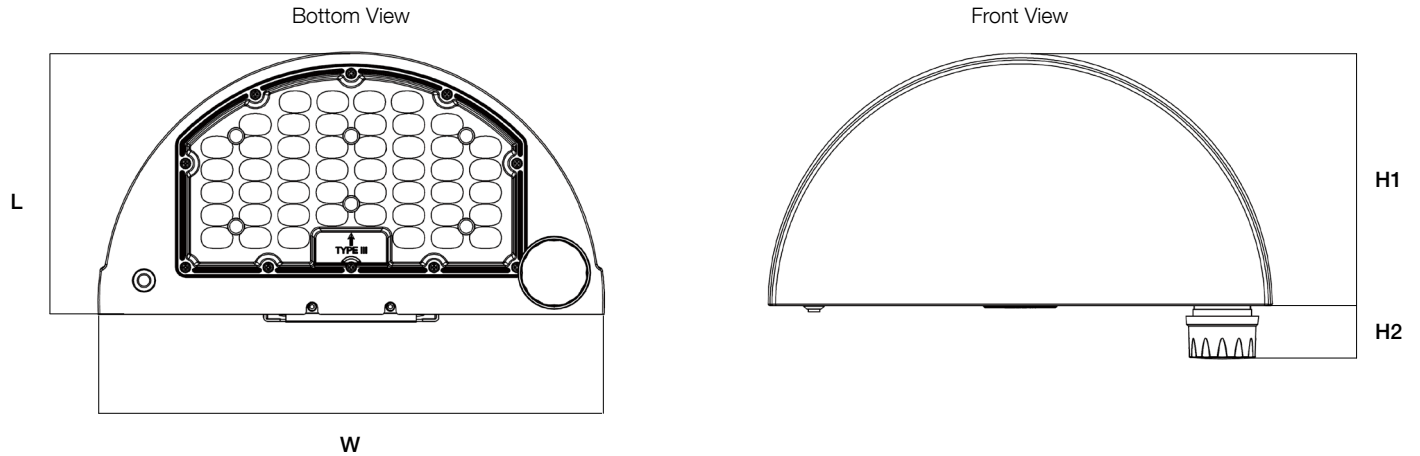

CCT / WATTAGE SELECTABLE

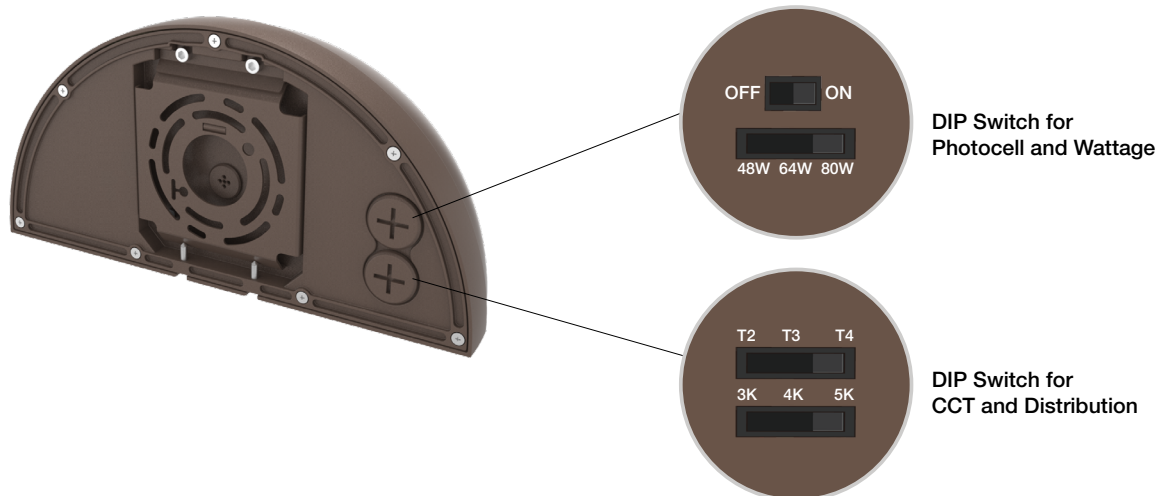

WRA SERIES HALF DOME WALL PACK

PERFORMANCE DATA

SYSTEM WATTS	LENS	DIST. TYPE	3000K			4000K			5000K		
			LUMENS	LPW	BUG RATING	LUMENS	LPW	BUG RATING	LUMENS	LPW	BUG RATING
WRA-40 @ 24W	FA	II	3887	158	B1-U0-G1	4007	166	B2-U0-G1	4010	163	B2-U0-G1
	FA	III	3891	160	B1-U0-G1	3971	166	B1-U0-G1	4015	165	B1-U0-G1
	FA	IV	3949	162	B1-U0-G1	4032	161	B1-U0-G1	3857	155	B1-U0-G1
WRA-40 @ 32W	FA	II	5114	155	B2-U0-G1	5343	166	B2-U0-G1	5263	160	B2-U0-G1
	FA	III	5186	159	B2-U0-G1	5373	167	B2-U0-G1	5403	165	B2-U0-G1
	FA	IV	5028	152	B2-U0-G2	5185	160	B2-U0-G2	5206	157	B2-U0-G2
WRA-40 @ 40W	FA	II	6400	152	B2-U0-G1	6629	163	B2-U0-G1	6527	155	B2-U0-G1
	FA	III	6408	155	B2-U0-G2	6644	165	B2-U0-G2	6670	161	B2-U0-G2
	FA	IV	6224	148	B2-U0-G2	6475	158	B2-U0-G2	6550	155	B2-U0-G2
WRA-80 @ 48W	FA	II	7700	155	B2-U0-G1	8111	169	B3-U0-G1	7880	159	B3-U0-G1
	FA	III	7755	159	B2-U0-G2	8032	169	B2-U0-G2	7939	163	B2-U0-G2
	FA	IV	7653	155	B2-U0-G2	7920	165	B2-U0-G2	7828	158	B2-U0-G2
WRA-80 @ 64W	FA	II	9807	150	B3-U0-G2	10356	165	B3-U0-G2	9992	153	B3-U0-G2
	FA	III	10155	157	B3-U0-G2	10367	167	B3-U0-G2	10204	160	B3-U0-G2
	FA	IV	9697	149	B2-U0-G2	10137	161	B2-U0-G2	10015	154	B2-U0-G2
WRA-80 @ 80W	FA	II	11843	142	B3-U0-G2	12836	160	B3-U0-G2	12547	149	B3-U0-G2
	FA	III	12375	152	B3-U0-G2	13163	165	B3-U0-G2	12715	156	B3-U0-G2
	FA	IV	12156	145	B3-U0-G2	12580	156	B3-U0-G3	12600	150	B3-U0-G3

WRA SERIES HALF DOME WALL PACK

SENSOR SPEC

Model	Type	Mounting	Coverage	Input	Function	Programmable
CONTROL-LVFA (see page 7 for detail)	Fixture Controller	-	-	12V DC	Bluetooth Mesh On/Off/Dimming Scheduling	AVI-ON Bluetooth Mobile App
CONTROL-BLE-SK104-PH (see page 8 for detail)	Fixture Controller	-	-	12V DC	Bluetooth Mesh On/Off/Dimming Scheduling CCT Tuning	AVI-ON Bluetooth Mobile App



CONTROL-LVFA




CONTROL-BLE-SK104-PH

WRA SERIES HALF DOME WALL PACK


EMB SPEC

Model	Battery Capacity	Input	Output	Output Power	Operating Temp	Installation
EMB-8W-Y-C	90mins	100-347VAC	300VDC	8w	-20°C ~ 60°C -4°F ~ 140°F	Factory or Field Install
EMB-9W-Y	90mins	100-347VAC	300VDC	9w	0°C ~ 60°C 32°F ~ 140°F	Factory or Field Install

EMB-8W-Y-C

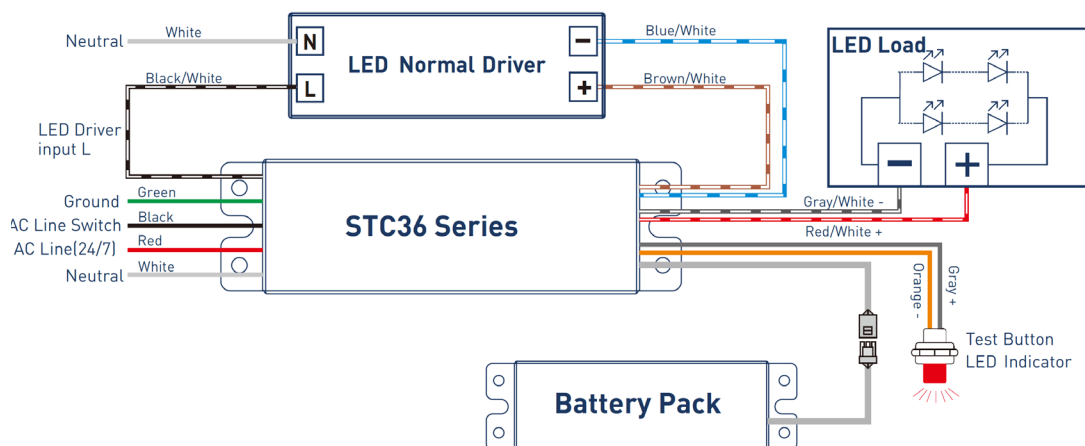

EMB-9W-Y

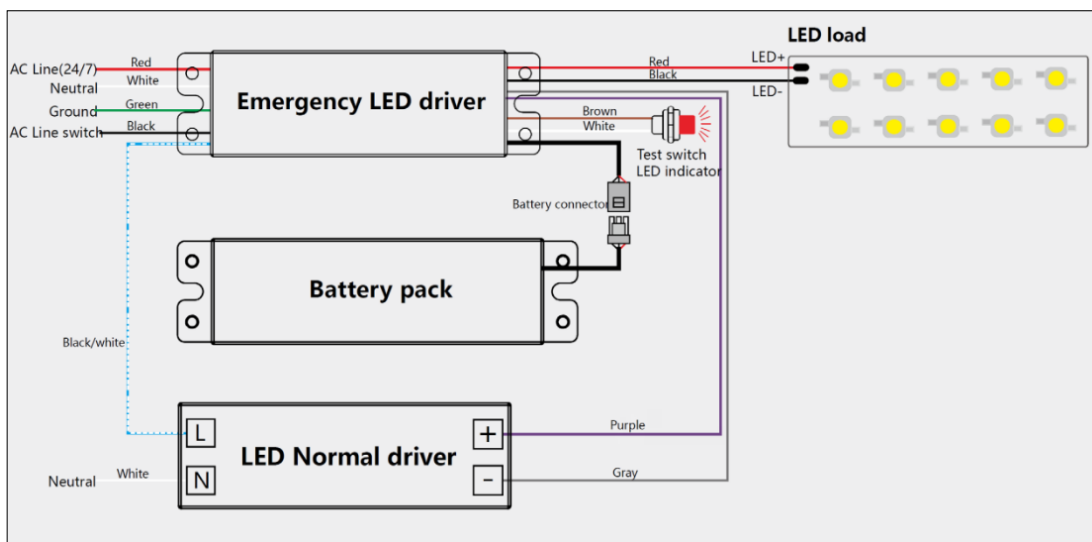

WRA SERIES HALF DOME WALL PACK

CONTROL-LVFA SPEC

Status LEDs & Config Button


Quick and easy validation of wiring and network

Direct Connect™ Sensor Port

Simple and cost-effective addition to Avi-on sensors

Terminal Blocks & Mounting Tabs

Faster, easier and lower cost installation eliminating connectors

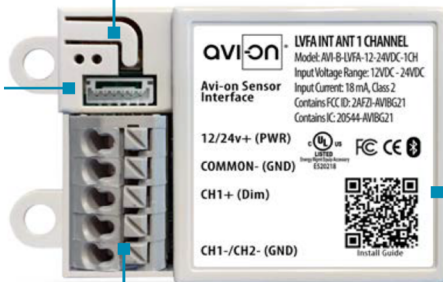

Internal Antenna

Improved performance and eliminates risk of accidentally cutting a hanging wire


SPECIFICATIONS

INPUT VOLTAGE: 12-24VDC
CURRENT: 15mA without a Sensor
 19mA with a DC PIR Sensor
 48mA with a DC Microwave Sensor
0-10V DIMMING: 12-24VDC
SIZE: 2.30in x 1.43in x 0.75in
 (58.2mm x 36.4mm x 19mm)
MOUNTING: Removable mounting tabs
WEIGHT: 0.45 oz (16g)
OPERATING TEMP: -22°F to +158°F (-30°C to + 70°C)


RADIO FREQUENCY: 2.4GHz
WIRELESS STANDARD: BLE 4.2 with Mesh
POINT TO POINT RANGE*: 80ft with obstructions
 350ft unobstructed
SECURITY: AES 128-bit encryption for device to device communication
 AES 256-bit encryption for device to cloud communication
WARRANTY: 5 years; 10 years optional
REGULATORY: FCC: 2AFZ1-AV1010 B
 IC: 20544-AV1010 B
 BQB: D031801, DID: 86303
 UL 916, 2043 (Plenum Rated)

*When communicating through the mesh, range is essentially unlimited (5000ft+)

WIRING DIAGRAM

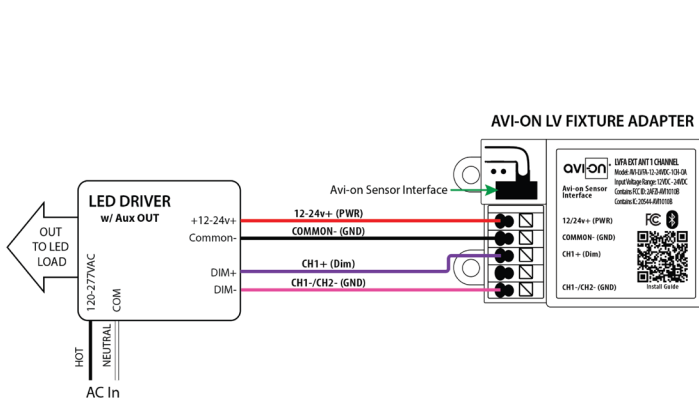

Fixture adapter powered by LED driver auxiliary output

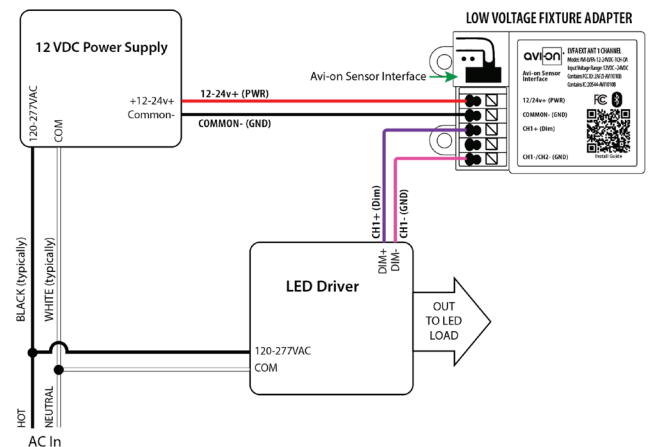

Fixture adapter connected to LED driver and using power supply

FEATURE


- **Installation:** Factory / Jobsite install through 1/2" knockout hole, 12V AUX power required
- **Commissioning:** Wirelessly through ALS Control Mobile App (iOS / Android)
- **Certification:** DLC 5.1 Networked Lighting Control System
- **Control:** High-End Trim, Zoning, Continuous Bi-level Dimming
- **CCT Tuning:** CCT Tuning feature for Dual/Multi-CCT LED board fixture only
- **Sensor:** Photocell
- **Zone Control:** Zoning and Grouping control, Scheduling



SPECIFICATIONS

SENSOR TYPE:	Photocell
WIRELESS STANDARDS:	5.0 Bluetooth Mesh
INPUT VOLTAGE:	12-14VDC, >50mA
CONTROL OUTPUT:	0-10V
OPERATING TEMP:	-40°F ~ +158°F (-40°C ~ +70°C)
COMMISSIONING RANGE:	50FT
BLUETOOTH RANGE:	100FT
DETECTION ANGLE:	360°
WARRANTY:	5 years
IP RATING:	IP65

DIMENSIONS

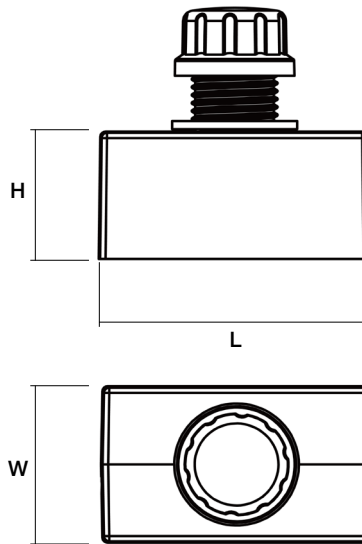

L	H	W
1.14" (29mm)	0.94" (24mm)	1.97" (50mm)

WIRING DIAGRAM

