

FEATURE

- **Installation:** Field Install w/ 4" Electrical Box (Min. 2.25" Deep)
- **Commissioning:** Wirelessly through ALS Control Mobile App (iOS / Android)
- **Control:** Hold time, Manual/Auto - On/Off
- **Sensor:** Motion (Occupancy/Vacancy/Manual)




SPECIFICATIONS

SENSOR TYPE:	Passive Infrared Sensor (PIR)
WIRELESS STANDARDS:	Bluetooth SIG Mesh
INPUT VOLTAGE:	120~347VAC
LIGHT-CONTROL:	1 ~ 46 FC
OPERATING TEMP:	32°F ~ +131°F (0°C ~ +55°C)



TIME SETTING:	10sec ~ 30min (adjustable)
DETECTION RANGE:	20FT Radius
DETECTION ANGLE:	360°
MOUNTING HEIGHT:	12FT Max.
WARRANTY:	5 years



DIMENSIONS

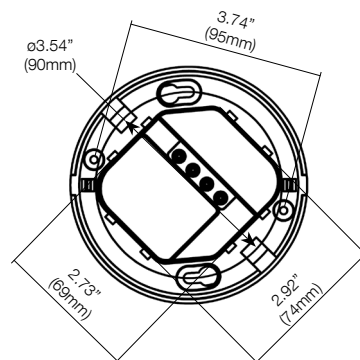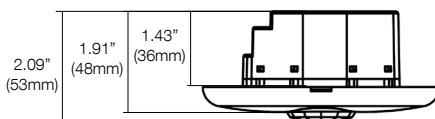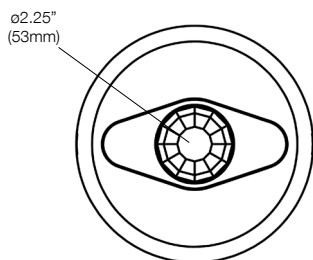

COVERAGE PATTERNS

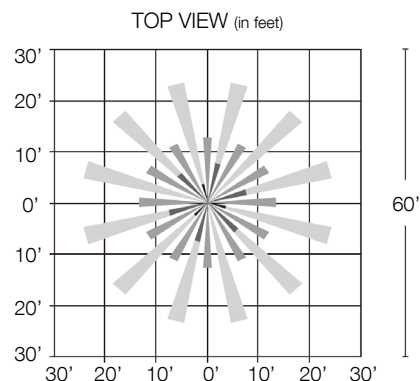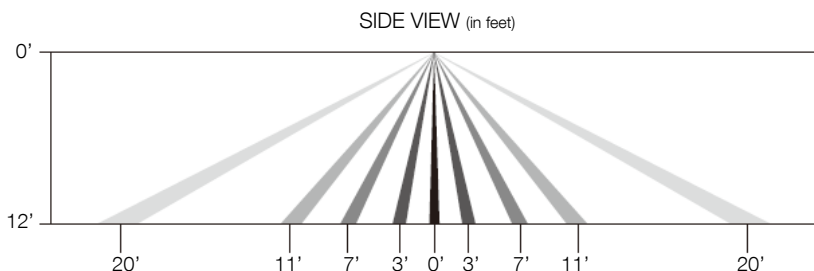

ORDER CODE

EXAMPLE: SENSOR-DT301P

A

SERIES

SENSOR-BLE-DT301

360° Coverage 120~347V Input Ceiling Mount PIR On/Off Occupancy Sensor

WIRING DIAGRAMS

