

EMB WALL Constant Output Emergency Battery

Client:
Project:
Type:
Quantity:

CONSTRUCTION

Red Metal Casing with separate external battery with quick connector.

ELECTRICAL

Universal Input: 100 ~ 347V AC, 50/60Hz

Input Current: 150mA

Recharge Power: 10W

Output Voltage: 170V DC

Surge Protection: Line-Neutral 3KV

Emergency Power: 8W / 18W



Self Diagnostic Li-ion Battery

Standard Operating Temperature: 5°C ~ 50°C (41°F ~ 122°F)

Cold Weather Option: -20°C ~ 50°C (-4°F ~ 122°F)

Recharge Time: 24 Hours

Discharge Time: 90 Mins

Optional Discharge Time: 120 Mins Extended Capacity Battery

Smart battery built-in over temperature, over charge, over discharge protections.

SELF-TESTING

The integrated Self-Diagnostic circuitry will automatically conduct monthly 30s and annual 90mins tests to verify proper emergency capability per Life Safety Code requirements.

NFPA 101, Life Safety Code Outlines the following schedule:

Monthly - During AC mode, the system conducts a 30s self-discharge test of the emergency led driver every 30 days and automatically restore to normal charging after 30s discharged.

Annually - During AC mode, the system conducts a 90mins self-discharge test of the emergency led driver every 365 days and automatically restore to normal charging after fully discharged.

WARRANTY

5 year warranty, see Limited Warranty for additional information.



EMB WALL Constant Output Emergency Battery


ORDER INFORMATION				EXAMPLE: EMB-8W-B	
Part	Series	Power	Discharge Time		
	EMB				
A	SERIES				
	EMB	High Voltage Output Smart Emergency Battery			
B	POWER				
	Code	Power	Input Voltage	Output	Operating Temperature
	8W-B	8W	100 ~ 347V AC	170V DC	5°C ~ 50°C (41°F ~ 122°F)
	18W-B	18W	100 ~ 347V AC	170V DC	5°C ~ 50°C (41°F ~ 122°F).
	18W-C-B	18W	100 ~ 347V AC	170V DC	-20°C ~ 50°C (-4°F ~ 122°F)
C	EMERGENCY BATTERY DISCHARGE TIME				
	blank	90-Minute Battery (default battery)			
	E	120-Minute Extended Capacity Battery			

EMB WALL Constant Output Emergency Battery


DIMENSIONS

MODEL	L	L2	W	W2	H	H2
EMB-8W-B	7.32" (186mm)	4.25" (108mm)	1.50" (38mm)	1.63" (42mm)	.99" (25mm)	.99" (25mm)
EMB-18W-B	7.32" (186mm)	7.07" (179mm)	1.50" (38mm)	1.63" (42mm)	.99" (25mm)	.99" (25mm)
EMB-18W-C-B	7.32" (186mm)	7.07" (179mm)	1.50" (38mm)	2.27" (58mm)	.99" (25mm)	1.29" (33mm)

DRIVER

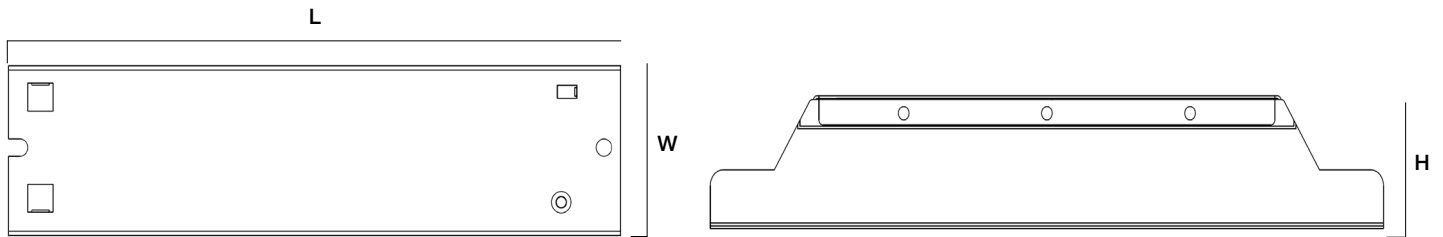


BATTERY

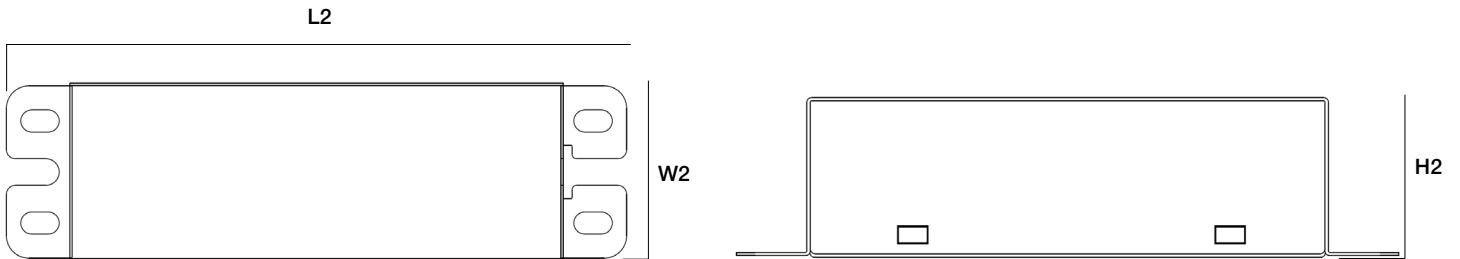

INDICATOR LIGHT and TEST BUTTON

Metal One-Piece Indicator Light


INSTALLATION HOLE SIZE:
 12mm TEST BUTTON: ϕ .48" (12.2mm)



EMB WALL Constant Output Emergency Battery

WIRING DIAGRAM

For LED fixture's power is higher than that of emergency LED drivers

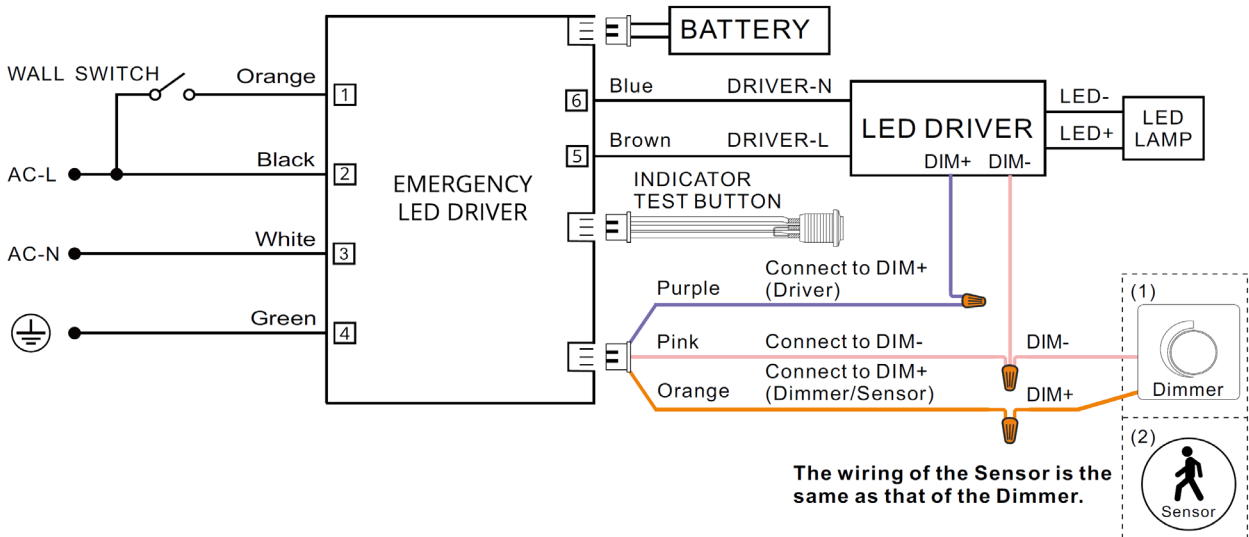

For LED fixture's power is less than that of emergency LED drivers

