

FD8A SERIES FLOODLIGHT

Client:
 Project:
 Type:
 Quantity:

CONSTRUCTION

Rugged die-cast aluminum housing with hinged, die-cast aluminum door.
 Low profile, 3G vibration rated compact design minimizes wind load requirements.
 Driver enclosure cover opens downwards, completely sealed against moisture and dusty.

OPTICS

UV-resistant polycarbonate optics, available in Type V distribution.
 Optics is precisely designed to shape the distribution, maximizing efficiency and application spacing.

ELECTRICAL

80+ CRI Lumileds LED.
 Field Selectable Lumen / CCT Technology.
 -40°C up to 50°C (-40°F up to 122°F) maximum ambient temperature.
 Long-life 100,000 hr LED at L70 @ 40°C.
 Driver operates at 120-277V input, 0-10V dimmable driver, down to 10%.
 50/60Hz, <20% THD, 0.9 power factor. Optional 347/480V input. Optional 10kV surge protection. Optional dimming sensor for occupancy and photosensing.

SENSORS (OPTIONAL)

SENSOR-BLE-6-4T Integral PIR ALS Control Bluetooth/on/off/dimming/photosensing.
 SENSOR-ANT-6-4T Plug-N-Play PIR on/off/dimming/photosensing.
 SENSOR-PH-PB-U Integral button style photocell.
 SENSOR-PH-PT-U/UD/HD Twist lock dimming/non-dimming photocontrol.
 CONTROL-LVFA AVI-ON Bluetooth Mesh Controller.
 CONTROL-BLE-SK104-PH ALS Control Bluetooth Fixture Controller.

MOUNTING

Standard slipfitter for 2-3/8" tenon (SF) and adjustable trunnion mount (TR).
 Optional tilt-able pole mount bracket (SRT).

STANDARD FINISH

Corrosion resistant Dark Bronze powder coating finish.

CUSTOM FINISH

Corrosion resistant Black, Graphite Metallic, Gray, Silver, White, Custom RAL#.

CERTIFICATION

IP65 Wet location label standard.
 Meets Buy America Act requirements.
 Title 24 compliant; see local ordinance for qualification information.
 All luminaires are built to UL1598 standards and bear appropriate cULus labels.
 DLC® Premium (DesignLights Consortium Qualified) listed.

WARRANTY

5 year warranty, see Limited Warranty for additional information.



100/140/180W w/Slipfitter



300/400W

SHIPPING DATA

Product	Measurement	Weight
FD8A-100	16"L x 14"W x 3"H	10 lb
FD8A-140	16"L x 14"W x 3"H	10 lb
FD8A-180	16"L x 14"W x 3"H	11 lb
FD8A-300	26"L x 14"W x 3"H	16 lb
FD8A-400	26"L x 14"W x 3"H	17 lb



FD8A SERIES FLOODLIGHT

ORDER INFORMATION				EXAMPLE : FD8A 180 SC T5 DB UNVD			
Fixture	Series	Power & LM	CCT	Distribution	Finish	Input	
	FD8A		SC				

A

SERIES

FD8A

Flood Light

B

POWER & LM

Code

Power

LM*

Efficacy (avg.)*

100

Field Selectable 40 / 60 / 80 / 100W

7,000 / 10,200 / 13,300 / 16,000

175lm/W

140

Field Selectable 60 / 90 / 120 / 140W

10,500 / 15,600 / 20,500 / 23,500

171lm/W

180

Field Selectable 72 / 108 / 144 / 180W

11,800 / 17,300 / 22,800 / 28,000

160lm/W

300

Field Selectable 120 / 180 / 240 / 300W

20,800 / 29,700 / 38,000 / 46,000

162lm/W

*LM Value & Efficacy based on 4000K

C

CCT

SC

Field Selectable 3000K / 4000K / 5000K

D

DISTRIBUTION

T5

Type V

E

FINISH

Standard

DB

Custom Color

Dark Bronze

CC

BK

SV

Black

Silver

GM

WH

Graphite Metallic

White

GR

RAL#

Gray

F

INPUT

UNVD

120-277V, 1-10V Dimmable

HVLD

347-480V, 1-10V Dimmable

FD8A SERIES FLOODLIGHT

ORDER INFORMATION (CONTINUED)

Mounting

Accessories Options

G MOUNTING

MOUNT-FD8A-SF	Slipfitter
MOUNT-FD8A-TR	Trunnion Mount
MOUNT-FD8A-SRT	Square/Round Pole Tilt-able 180°

H ACCESSORIES/OPTIONS

AIA	Assembled in America, compliant with BAA (COTS)
SHIELD-FD8A*	Backlight Shield on Lens
SHIELD-FD8A-VISOR-A / B*	4-Side Visor, A: 100 ~ 180W, B: 250 ~ 400W
SENSOR-ANT-6-4T**	Integral PIR on/off/dimming/photosensing
SENSOR-BLE-6-4T**	"Plug-N-Play" Integral Bluetooth Daylight Harvesting Sensor (ALS Control Mobile App)
SENSOR-PH-PB-U**	Button Style Photocell
SENSOR-PH-PT-U / UD / HD**	Twist Lock Photocell / U: 120-277V, UD: 120-277V, HD: 480V input
REMOTE-RC100	Handheld Remote Commissioning Tool for SENSOR-ANT (1 per job)
SURGE-LSP4-U/H	10kV inline Surge Protection for Universal input / U: 120-277V, H: 480V input
CONTROL-LVFA**	AVI-ON Bluetooth Mesh Control System
CONTROL-BLE-SK104-PH**	Integral Bluetooth Fixture Controller w/Button Photocell (ALS Control Mobile App)

*see page 9 for shield spec

**see page 10 for sensor spec

FD8A SERIES FLOODLIGHT

ORDER INFORMATION				EXAMPLE : FD8A 400 MC T5 DB UNVD			
Fixture	Series	Power & LM	CCT	Distribution	Finish	Input	
	FD8A	400	MC				
A	SERIES						
	FD8A	Flood Light					
B	POWER & LM						
	Code	Power	LM*	Efficacy (avg.)*			
	400	Field Selectable 300 / 320 / 360 / 400W	47,500 / 51,500 / 56,500 / 61,000	160lm/W			
	*LM Value & Efficacy based on 4000K, T5 Distribution						
C	CCT						
	MC	Field Selectable 4000K / 5000K					
D	DISTRIBUTION						
	T5	Type V					
E	FINISH						
	Standard						
	DB	Dark Bronze					
	Custom Color						
	CC	BK	Black	GM	Graphite Metallic	GR	Gray
		SV	Silver	WH	White	RAL#	
F	INPUT						
	UNVD	120-277V, 1-10V Dimmable		HVLD	347V, 480V, 1-10V Dimmable		

FD8A SERIES FLOODLIGHT

ORDER INFORMATION (CONTINUED)

Mounting

Accessories Options

G MOUNTING

MOUNT-FD8A-SF	Slipfitter
MOUNT-FD8A-TR	Trunnion Mount
MOUNT-FD8A-SRT	Square/Round Pole Tilt-able 180°

H ACCESSORIES/OPTIONS

AIA	Assembled in America, compliant with BAA (COTS)
SHIELD-FD8A*	Backlight Shield on Lens
SHIELD-FD8A-VISOR-A / B*	4-Side Visor, A: 100 ~ 180W, B: 250 ~ 400W
SENSOR-ANT-6-4T**	Integral PIR on/off/dimming/photosensing
SENSOR-BLE-6-4T**	"Plug-N-Play" Integral Bluetooth Daylight Harvesting Sensor (ALS Control Mobile App)
SENSOR-PH-PB-U**	Button Style Photocell
SENSOR-PH-PT-U / UD / HD**	Twist Lock Photocell / U: 120-277V, UD: 120-277V, HD: 480V input
REMOTE-RC100	Handheld Remote Commissioning Tool for SENSOR-ANT (1 per job)
SURGE-LSP4-U/H	10kV inline Surge Protection for Universal input / U: 120-277V, H: 480V input
CONTROL-LVFA**	AVI-ON Bluetooth Mesh Control System
CONTROL-BLE-SK104-PH**	Integral Bluetooth Fixture Controller w/Button Photocell (ALS Control Mobile App)



*see page 9 for shield spec

**see page 10 for sensor spec

FD8A SERIES FLOODLIGHT

DIMENSIONS

Model	L	W	H
FD8A-100 / 140 / 180	15.61" (396mm)	13.05" (331mm)	2.52" (64mm)
FD8A-300 / 400	24.98" (634mm)	13.05" (331mm)	2.52" (64mm)
Bracket - SF	10.00" (254mm)	3.35" (85mm)	3.35" (85mm)
Bracket - TR	5.93" (151mm)	1.97" (50mm)	5.43" (138mm)
Bracket - SRT	9.25" (235mm)	3.55" (90mm)	6.97" (177mm)

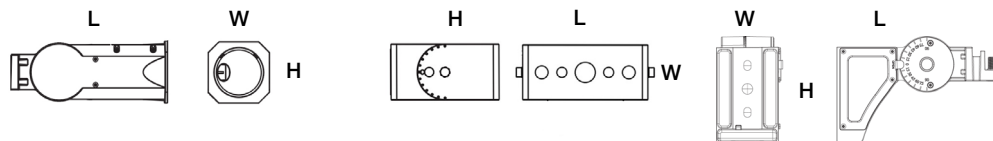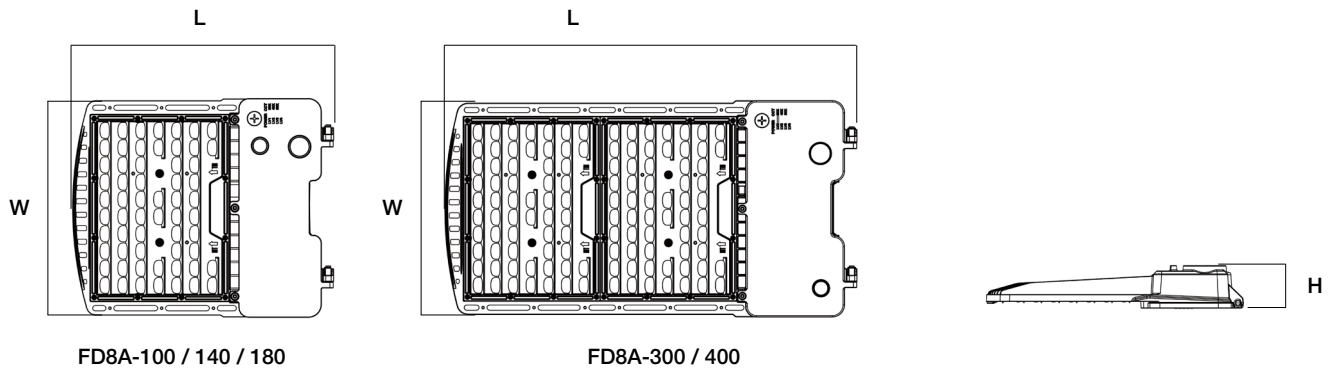

SF (Slipfitter)

TR (Trunnion Mount)

SRT (Tilt-able 180° Square/
Round)

EPA (ft²)

Mounting Option	Single	2 @ 90°	2 @ 120°	2 @ 180°	3 @ 90°	3 @ 120°	4 @ 90°
100 / 140 / 180W	0.363	0.685	0.886	0.726	1.048	1.208	1.048
300 / 400W	0.476	0.809	1.059	0.952	1.285	1.392	1.285

FD8A SERIES FLOODLIGHT

PERFORMANCE DATA

SYSTEM WATTS	VOLTAGE	DIST. TYPE	3000K		4000K		5000K	
			LUMEN	LPW	LUMEN	LPW	LUMEN	LPW
FD8A-100 @ 40W	120-277V	V	6560	164	7000	175	6700	168
FD8A-100 @ 60W	120-277V	V	9600	160	10200	170	9850	164
FD8A-100 @ 80W	120-277V	V	12500	156	13300	166	12800	160
FD8A-100 @ 100W	120-277V	V	15100	151	16000	160	15600	156
FD8A-140 @ 60W	120-277V	V	9600	160	10500	175	10000	167
FD8A-140 @ 90W	120-277V	V	14000	156	15600	172	14500	161
FD8A-140 @ 120W	120-277V	V	18500	154	20500	171	19000	158
FD8A-140 @ 140W	120-277V	V	21000	150	23500	168	21500	154
FD8A-180 @ 72W	120-277V	V	10800	150	11800	164	11000	153
FD8A-180 @ 108W	120-277V	V	15800	146	17300	160	16200	150
FD8A-180 @ 144W	120-277V	V	20800	144	22800	158	21000	146
FD8A-180 @ 180W	120-277V	V	25500	142	28000	156	26000	144
FD8A-300 @ 120W	120-277V	V	18500	154	20800	173	19000	158
FD8A-300 @ 180W	120-277V	V	26600	148	29700	165	27500	153
FD8A-300 @ 240W	120-277V	V	34500	144	38000	158	35500	148
FD8A-300 @ 300W	120-277V	V	42500	142	46000	153	43500	145

FD8A SERIES FLOODLIGHT

PERFORMANCE DATA (CONTINUED)

SYSTEM WATTS	VOLTAGE	DIST. TYPE	3000K		4000K		5000K	
			LUMEN	LPW	LUMEN	LPW	LUMEN	LPW
FD8A-400 @ 300W	120-277V	V	-	-	47500	164	46500	160
FD8A-400 @ 320W	120-277V	V	-	-	51500	161	50500	159
FD8A-400 @ 360W	120-277V	V	-	-	56500	157	55500	154
FD8A-400 @ 400W	120-277V	V	-	-	61000	153	60800	152

DLC CODE

Part Number	DLC Product ID	DLC Class
FD8A-100SCT5-[DB, BK, WH][UNVD,HVLD][Blank, SENSOR-BLE-619-L3/L4, SENSOR-PH-PB-U, SENSOR-823-L3/L4, SENSOR-820]	PENDING	Premium
FD8A-140SCT5-[DB, BK, WH][UNVD,HVLD][Blank, SENSOR-BLE-619-L3/L4, SENSOR-PH-PB-U, SENSOR-823-L3/L4, SENSOR-820]	PENDING	Premium
FD8A-180SCT5-[DB, BK, WH][UNVD,HVLD][Blank, SENSOR-BLE-619-L3/L4, SENSOR-PH-PB-U, SENSOR-823-L3/L4, SENSOR-820]	S-C2P7XF	Premium
FD8A-300SCT5-[DB, BK, WH][UNVD,HVLD][Blank, SENSOR-BLE-619-L3/L4, SENSOR-PH-PB-U, SENSOR-823-L3/L4, SENSOR-820]	S-W8FM1C	Premium
FD8A-400MCT5-[DB, BK, WH][UNVD,HVLD][Blank, SENSOR-BLE-619-L3/L4, SENSOR-PH-PB-U, SENSOR-823-L3/L4, SENSOR-820]	S-NG5310	Premium

FD8A SERIES FLOODLIGHT

SHIELD SPEC

SHIELD-FD8A

Backlight Shield on Lens


FD8A-100 ~ 180W 1:1



SHIELD-FD8A-VISOR

4-Side Metal Visor

A: FD8A-100 ~ 180W 1:1

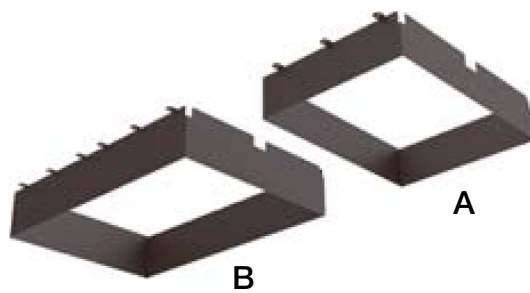

FD8A SERIES FLOODLIGHT

SENSOR SPEC

Model	Type	Mounting	Coverage	Input	Function	Programmable
SENSOR-ANT-6-4T	PIR	up to 40FT	30FT radius	12V DC	On/Off/Dimming	REMOTE-RC100
SENSOR-BLE-6-4T (see page 12 for detail)	PIR	up to 40FT	30FT radius	12V DC	Bluetooth Mesh On/Off/Dimming Daylight Harvesting	ALS Control Bluetooth Mobile App
SENSOR-PH-PB-U	-	-	-	Universal	Dusk-to-Dawn Control	-
SENSOR-PH-PT-U SENSOR-PH-PT-UD SENSOR-PH-PT-HD	-	-	-	Universal 277 ~ 480V	Dusk-to-Dawn Control	-
CONTROL-LVFA (see page 11 for detail)	Fixture Controller	-	-	12V DC	Bluetooth Mesh On/Off/Dimming Scheduling	AVI-ON Bluetooth Mobile App
CONTROL-BLE-SK104-PH (see page 13 for detail)	Fixture Controller	-	-	12V DC	Bluetooth Mesh On/Off/Dimming Scheduling CCT Tuning	ALS Control Bluetooth Mobile Control



SENSOR-ANT-6-4T
SENSOR-BLE-6-4T



SENSOR-PH-PB-U



SENSOR-PH-PT-U/H



SENSOR-PH-PT-HD



CONTROL-LVFA



CONTROL-BLE
-SK104-PH

FD8A SERIES FLOODLIGHT

CONTROL-LVFA SPEC

Status LEDs & Config Button


Quick and easy validation of wiring and network

Direct Connect™ Sensor Port

Simple and cost-effective addition to Avi-on sensors

Terminal Blocks & Mounting Tabs

Faster, easier and lower cost installation eliminating connectors

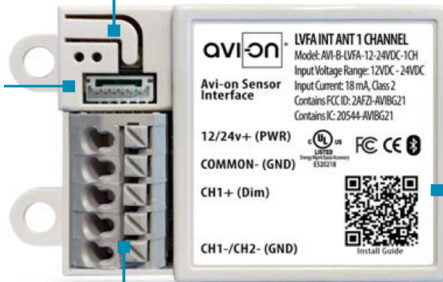

Internal Antenna

Improved performance and eliminates risk of accidentally cutting a hanging wire


SPECIFICATIONS

INPUT VOLTAGE: 12-24VDC
CURRENT: 15mA without a Sensor
 19mA with a DC PIR Sensor
 48mA with a DC Microwave Sensor
0-10V DIMMING: 12-24VDC
SIZE: 2.30in x 1.43in x 0.75in
 (58.2mm x 36.4mm x 19mm)
MOUNTING: Removable mounting tabs
WEIGHT: 0.45 oz (16g)
OPERATING TEMP: -22°F to +158°F (-30°C to + 70°C)


RADIO FREQUENCY: 2.4GHz
WIRELESS STANDARD: BLE 4.2 with Mesh
POINT TO POINT RANGE*: 80ft with obstructions
 350ft unobstructed
SECURITY: AES 128-bit encryption for device to device communication
 AES 256-bit encryption for device to cloud communication
WARRANTY: 5 years; 10 years optional
REGULATORY: FCC: 2AFZI-AVI1010 B
 IC: 20544-AVI1010 B
 BQB: D031801, DID: 86303
 UL 916, 2043 (Plenum Rated)

*When communicating through the mesh, range is essentially unlimited (5000ft+)

WIRING DIAGRAM

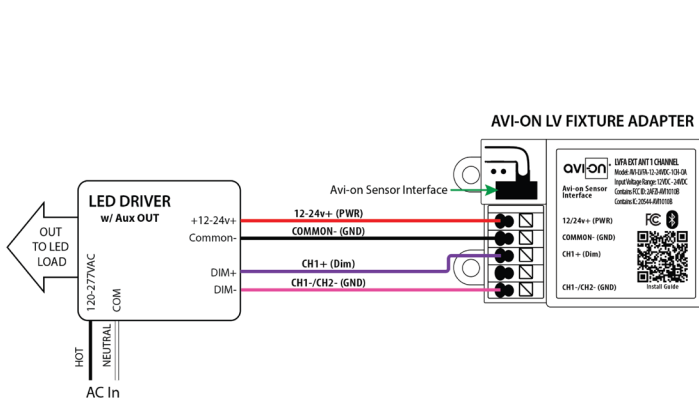

Fixture adapter powered by LED driver auxiliary output

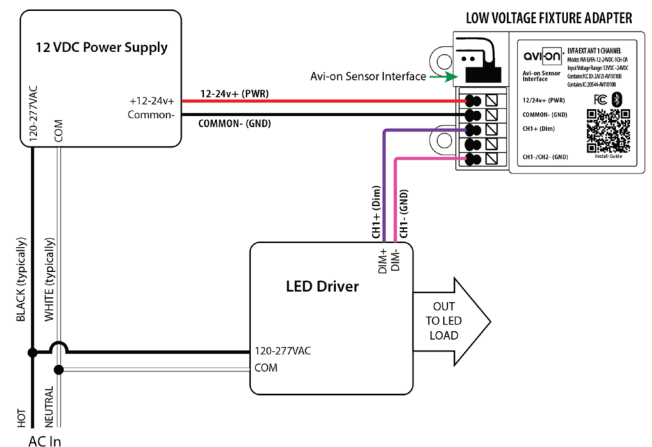

Fixture adapter connected to LED driver and using power supply



SENSOR-BLE-6-4T BLUETOOTH PIR SENSOR

Client:
Project:
Type:
Quantity:

FEATURE


- **Installation:** Plug-N-Play via AUX socket on attached fixture
- **Commissioning:** Wirelessly through ALS Control Mobile App (iOS / Android)
- **Certification:** DLC 5.1 Networked Lighting Control System
- **Control:** Hold time, High-Low setting, continuous Bi-level dimming, Code-compliant manual-on or auto-off capability
- **Sensor:** Motion (Occupancy/Vacancy/Manual) and Daylight Harvesting
- **Room and Zone Control:** Zoning and Grouping control, Scheduling



SPECIFICATIONS



SENSOR TYPE:	Passive Infrared Sensor (PIR)
WIRELESS STANDARDS:	5.0 Bluetooth Mesh
INPUT VOLTAGE:	12-24VDC, >50mA
CONTROL OUTPUT:	0-10V
OPERATING TEMP:	-4°F ~ +140°F (-20°C ~ +60°C)
COMMISSIONING RANGE:	50FT
BLUETOOTH RANGE:	164FT
DETECTION ANGLE:	360°
MOUNTING HEIGHT:	Up to 40FT
WARRANTY:	5 years
IP RATING:	IP65

DIMENSIONS

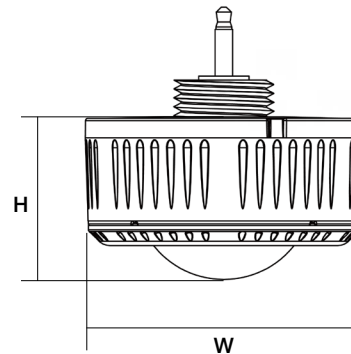

H	W
1.03" (26.2mm)	2.17" (55mm)

COVERAGE PATTERNS

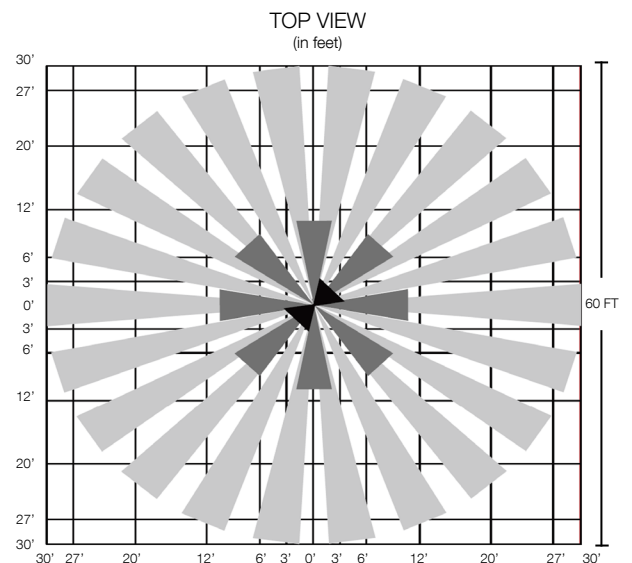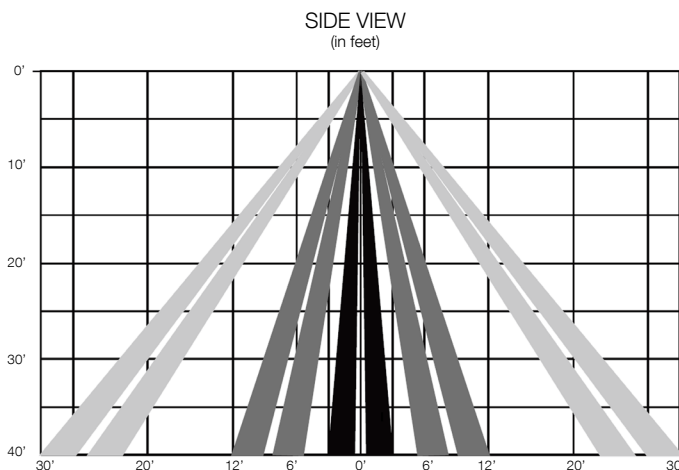

FEATURE


- **Installation:** Factory / Jobsite install through 1/2" knockout hole, 12V AUX power required
- **Commissioning:** Wirelessly through ALS Control Mobile App (iOS / Android)
- **Certification:** DLC 5.1 Networked Lighting Control System
- **Control:** High-End Trim, Zoning, Continuous Bi-level Dimming
- **CCT Tuning:** CCT Tuning feature for Dual/Multi-CCT LED board fixture only
- **Sensor:** Photocell
- **Zone Control:** Zoning and Grouping control, Scheduling



SPECIFICATIONS

SENSOR TYPE:	Photocell
WIRELESS STANDARDS:	5.0 Bluetooth Mesh
INPUT VOLTAGE:	12-14VDC, >50mA
CONTROL OUTPUT:	0-10V
OPERATING TEMP:	-40°F ~ +158°F (-40°C ~ +70°C)
COMMISSIONING RANGE:	50FT
BLUETOOTH RANGE:	100FT
DETECTION ANGLE:	360°
WARRANTY:	5 years
IP RATING:	IP65

DIMENSIONS

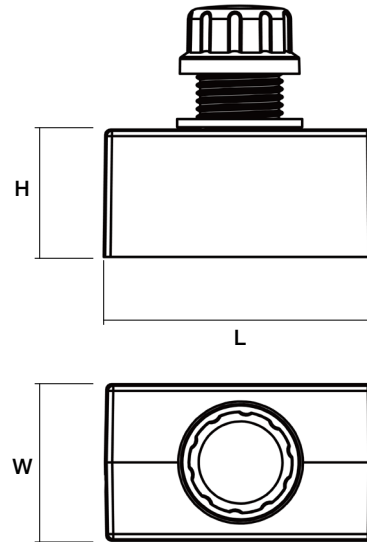

L	H	W
1.14" (29mm)	0.94" (24mm)	1.97" (50mm)

WIRING DIAGRAM

