PLEASE READ AND FOLLOW ALL SAFETY INSTRUCTIONS SAVE THIS SHEET

To Avoid Risk of Electric Shock and Injury

- Never attempt any work on the luminaire unless it is disconnected from the power source.
- Any Installation and service of the luminaire should be done by a certified electrician.
- Confirm the supply voltage matches the voltage labeled on the luminaire.
- Make sure all electrical and grounded connections are in accordance with the National Electric Code (NEC) and any local codes.
- Make sure all connections are capped with UL-listed wire connectors.
- Allow luminaire to cool down before handling. Never handle luminaire when it is in use.
- Do not exceed the maximum wattage labeled on luminaire.
- Always wear gloves and safety glasses when installing, handling, or performing routine maintenance on the luminaire.
- Do not look directly at the light source when luminaire is on.

To Avoid Risk of Fire and Product Damage

- Keep any combustible material away from the luminaire.
- Do not operate luminaire near any persons, materials, or substances that are sensitive to heat.
- When mounting, make sure wiring is secured from any edges or objects that can damage the wire insulation.
- Do not obstruct ventilation of the luminaire. Do not cover the luminaire with foam or other insulation material that will restrict convection or conduction cooling.
- Only use luminaire at its intended location.
- LED fixtures are sensitive to polarity. Make sure to identify proper polarity before installing.
- Electrostatic Discharge (or ESD) can damage LED luminaire. Make sure to always wear personal grounding equipment when installing or servicing the luminaire.
- Avoid touching individual electrical components, which can cause ESD and will reduce the life and performance of the luminaire.
- Do not power luminaire on and off frequently as this will greatly reduce luminaire's lifespan.
- Always read the luminaire's complete installation instruction sheet before installing luminaire.
- Always inspect the luminaire for damage. DO NOT INSTALL fixture if there is any damage. Contact your distributor or representative where you purchased the luminaire for warranty claim if luminaire is damaged.

To Maintain Luminaire and Ensure Consistent Performance

- **IMPORTANT: Always make sure luminaire is disconnected from power source when performing routine maintenance.**
- Occasionally clean luminaire lens. When cleaning lens, you may dust with soft, dry and clean cloth. You may also use solution of warm water and non-abrasive cleaning agent then wipe with dry cloth. DO NOT USE alkaline or acid cleaners.
- Keep heatsink clear of dust or debris from time to time.
- Maintaining the luminaire on a routine basis is highly recommended.

Failure to follow any of these instructions may void warranty.

Please visit www.alslighting.us to view complete product Terms and Conditions.

Advantage Lighting Solutions assumes no responsibility for claims arising from improper or careless installation or handling of its products.

Important Safety Instructions


1. Make sure power is turned OFF before installing.
2. Inspect fixture for any damages. If damaged, DO NOT install fixture and contact local ALS distributor immediately.

14750 East Nelson Ave #B
City of Industry, CA 91744
909-598-1077
www.alslighting.us

ALS Advantage Lighting Solutions
© Advantage Lighting Solutions
All Rights Reserved
Specifications and dimensions
subject to change without notice


Before Installation

1. Take out the fixture and installation kit from the packaging, inspect for any damages.
2. Remove lens and LED module board.
3. Pass the cord through the waterproof strain relief and fix the combination to the fixture through the reserved knockout.
4. Connect the cord to the input of the driver and reattach the LED module board and lens.

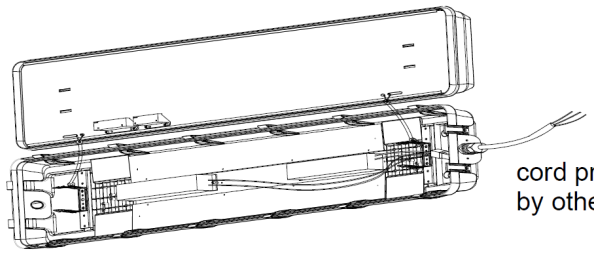


Surface Mounting

1. Locate drill holes for mounting brackets. Use hardware found in hardware kit. Mount bracket to the mounting surface.
2. Push housing into Surface Mounting Brackets. Ensure that the housing is secure to the brackets.
3. Use appropriate UL approved wire connectors as required by code to complete wiring with main power as shown in the figure. If outdoor surface is irregular, use caulk to seal any gaps around Housing.

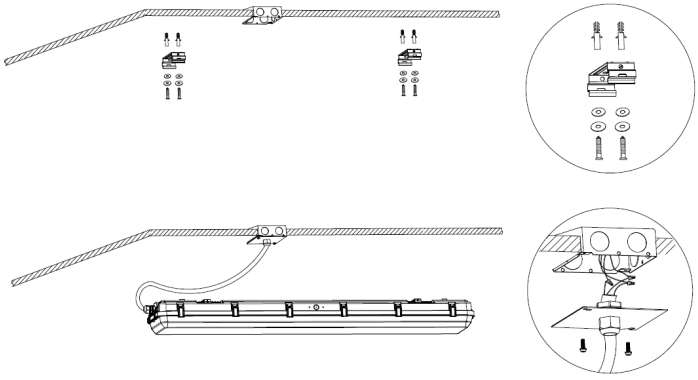


Suspended Mounting

1. Secure Surface Mounting Brackets to Housing as shown and loop V-Hooks (included) on the brackets.
2. To suspend Housing, connect each V-Hook to two equal lengths of chain (not supplied) and/or appropriate hardware (by others) suitable for mounting surface.
3. Use appropriate UL approved wire connectors as required by code to complete wiring with main power

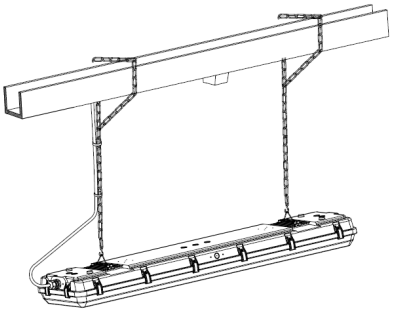

General Wiring Diagram

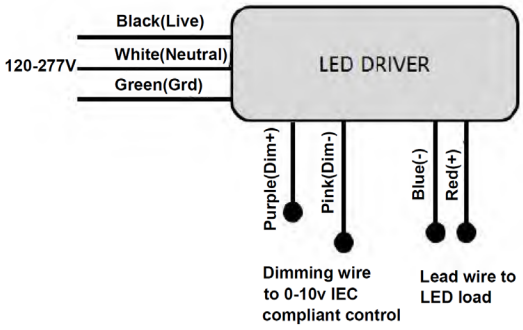

NOTICE: Green ground screw provided in proper location. Do not relocate.
NOTICE: Minimum 90° supply conductors.
NOTICE: Specifications and dimensions subject to change without notice.
NOTICE: Suitable for wet location.

14750 East Nelson Ave #B
City of Industry, CA 91744
909-598-1077
www.alslighting.us

© Advantage Lighting Solutions
All Rights Reserved
Specifications and dimensions
subject to change without notice