

## LPA SERIES G2 SELECTABLE BACKLIT PANEL

Client:  
Project:  
Type:  
Quantity:

### CONSTRUCTION

Low profile extruded aluminum frame, all corners are rounded for safe handling. Multiple wiring entrances on driver enclosure for easy access. The backplate includes integral T-bar clips for installation into T-grid ceilings.

### OPTICS

Backlit design provides exceptional lighting distribution. Frosted PMMA lens offers edge to edge illumination without pixilation or bright spots.

### ELECTRICAL

Long-life, high-efficacy, micro-power LEDs, illumination for extended service life. Greater than 70% LED lumen maintenance at 100,000 hours (L70>100,000).

Selectable lumen and CCT technology allows easy field-adjustable capability, luminaire ships with maximum output and 6500K CCT setting.

All CCTs are within 3 MacAdam ellipses, 80CRI.

Special made 90CRI LED, consult factory.

Driver operates at 120-277V input, 0-10V dimmable driver, dim-to-off voltage threshold of optional 12V AUX integrated driver ranges from 0.1V to 0.5V.

### MOUNTING

Designed to accommodate lay-in ceilings, Slot T, and T-bar suspension system for 5/8" and 3/8" width. Built-in earthquake clips come standard.

Surface/cable mount applications, use surface/cable kit accessories.

Plaster or sheetrock installations, select flange kit.

Hard ceiling application, select hard ceiling kit.

### SENSORS (OPTIONAL)

SENSOR-BLE-7 Integral Microwave Bluetooth Wireless Motion/on/off/dimming/photosensing.

SENSOR-ANT-7 Integral Microwave Motion/on/off/dimming/photosensing.

CONTROL-LVFA AVI-ON Bluetooth Mesh Controller.

CONTROL-BLE-620 Bluetooth Wireless Fixture Controller for CCT Tuning, Dimming, Grouping, Scheduling Features (ALS Control Mobile App)

### STANDARD FINISH

90% minimum average reflective white polyester powder coat bonded to phosphate-free, multi-stage pretreated metal. All parts painted after fabrication to facilitate installation, increase efficiency, and inhibit corrosion.

### CUSTOM FINISH

AkzoNobel Interpon 600 Series anti-microbial White / Clear coating for healthcare application.

### CERTIFICATION

Meets Buy America Act requirements.

IC Rated, suitable for Damp location.

All luminaires are built to UL1598 standards and bear appropriate cULus labels.

For Emergency application, equipment with UL924 certified battery packs.

DLC® Standard (DesignLights Consortium Listed)

### WARRANTY

5 year warranty, see Limited Warranty for additional information.



### SHIPPING DATA

Product	Measurement	Weight
LPA-G2-1 (4-pack)	49"L x 13"W x 6"H	23 lb
LPA-G2-2 (4-pack)	26"L x 26"W x 6"H	20 lb
LPA-G2-4 (4-pack)	49"L x 26"W x 6"H	38 lb



## LPA SERIES G2 SELECTABLE BACKLIT PANEL

ORDER INFORMATION				EXAMPLE: LPA G2 2 BACKLIT			
Fixture	Series	Model	Finish	Input			
	LPA-G2						
Mounting							
Accessories							
Options							
A	SERIES						
	LPA-G2	Selectable Lumen and CCT Panel, Generation 2					
B	MODEL						
	Code	Size	Power	CCT	lm/W (avg.)		
	1-BACKLIT	1x4	20W / 25W / 30W / 35W / 40W	3000K / 3500K / 4000K / 5000K / 6500K	110lm/W		
	2-BACKLIT	2x2	20W / 25W / 30W / 35W / 40W	3000K / 3500K / 4000K / 5000K / 6500K	125lm/W		
	4-BACKLIT	2x4	25W / 30W / 35W / 40W / 50W	3000K / 3500K / 4000K / 5000K / 6500K	125lm/W		
C	FINISH						
	WH	White					
	AMP	Antimicrobial White Finish, AkzoNobel Interpon 600 Series Anti-Microbial White / Clear coating for healthcare application					
D	INPUT						
	blank	120-277V, 10% 0-10V Dimming w/12V AUX Output	UD1%	120-277V, 1% 0-10V Dimming w/12V AUX Output			
E	MOUNTING						
	blank	Standard lay-in					
	MOUNT-LP-14-FGK	1.52” Tall 1x4 Flange Kit (Plaster, Sheetrock or Drywall)					
	MOUNT-LP-22-FGK	1.52” Tall 2x2 Flange Kit (Plaster, Sheetrock or Drywall)					
	MOUNT-LP-24-FGK	1.52” Tall 2x4 Flange Kit (Plaster, Sheetrock or Drywall)					
	MOUNT-LP-14-SMK	4” Tall 1x4 Surface Mount Kit for LPA-1					
	MOUNT-LP-22-SMK	4” Tall 2x2 Surface Mount Kit for LPA backlit					
	MOUNT-LP-24-SMK	4” Tall 2x4 Surface Mount Kit for LPA backlit					
	MOUNT-LP-PMK	Aircraft Cable Pendant Mount					
F	ACCESSORIES/OPTIONS						
	AIA	Assembled in America, compliant with BAA (COTS)					
	-C	3/8” x 6FT Steel Flex 5-18AWG Solid 6’ leads BLK/WH/GRN/PUR/PNK & 3/8” Die Cast Screw-In Locknut Connectors					
	EMB-H08170*	90-Minute Self-Diagnostic Emergency Battery 8W 100-347VAC Input 170VDC Output					
	EMB-H18170*	90-Minute Self-Diagnostic Emergency Battery 18W 100-347VAC Input 170VDC Output					
	GTD-ESRLUD**	Emergency Battery Generator Transfer Device 120-277 VAC Input					
	SENSOR-BLE-7*	Integral Microwave Bluetooth Wireless Bi-Level Motion Sensor (ALS Control Mobile App)					
	SENSOR-ANT-7*	Integral Microwave Bi-Level Motion Sensor					
	CONTROL-LVFA*	AVI-ON Bluetooth Mesh Control System					
	CONTROL-BLE-620	Bluetooth Wireless Fixture Controller for CCT Tuning, Dimming, Grouping, Scheduling Features (ALS Control Mobile App)					
	REMOTE-RC100	Handheld Remote Commissioning Tool for SENSOR-ANT (1 per job)					
	90CRI	90CRI (Special made, consult factory)					


\*see page 5 for sensor and emb spec

\*\*see page 10-11 for GTD spec

LPA SERIES G2 SELECTABLE BACKLIT PANEL

DIMENSIONS

Model	L	W	D
LPA-G2-1	47.80" (1213mm)	11.90" (301mm)	1.50" (38mm)
LPA-G2-2	23.70" (603mm)	23.70" (603mm)	1.50" (38mm)
LPA-G2-4	47.80" (1213mm)	23.70" (603mm)	1.50" (38mm)

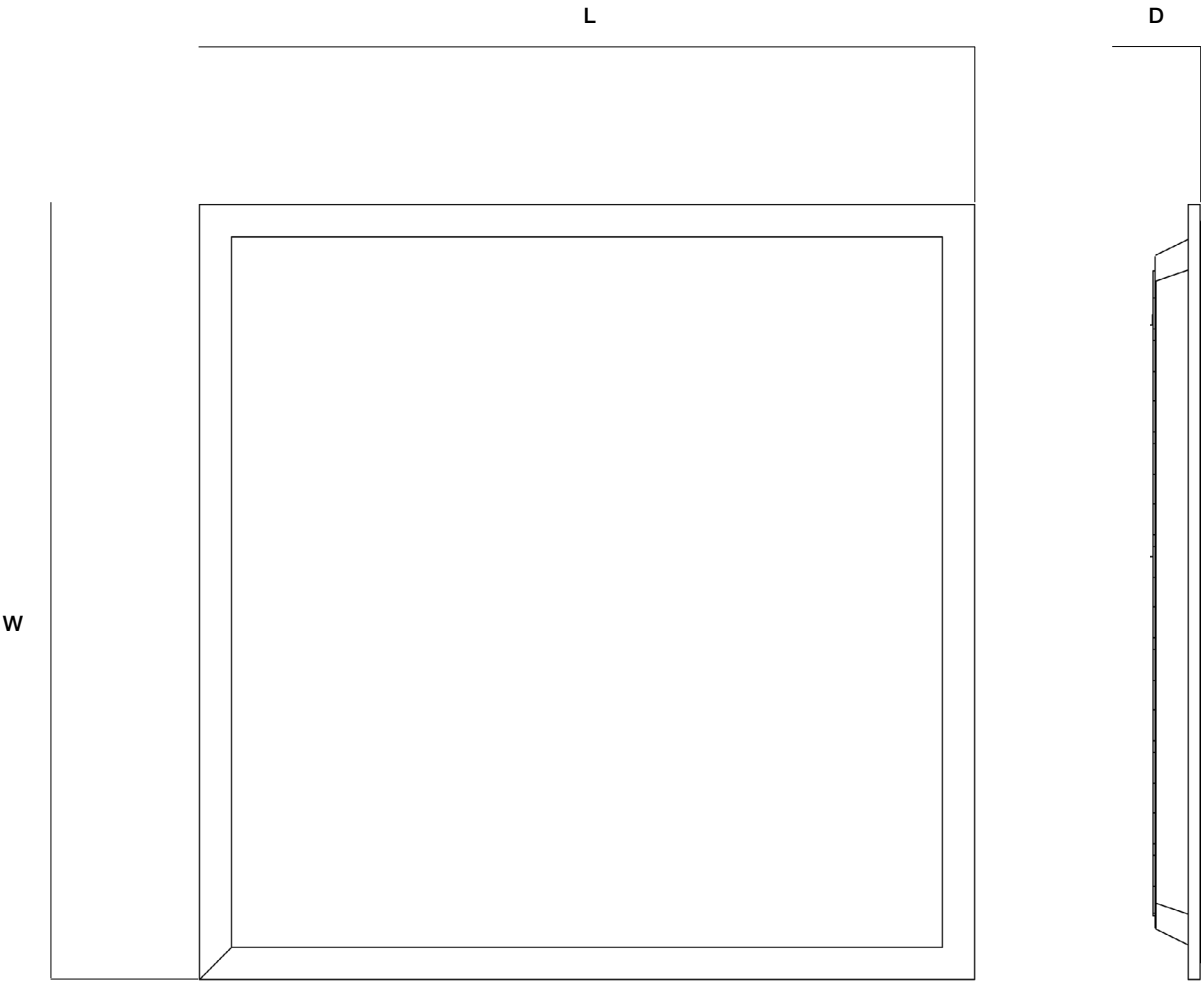

## LPA SERIES G2 SELECTABLE BACKLIT PANEL

### PERFORMANCE DATA - LPA-G2

MODEL	SYSTEM WATTS	VOLTAGE	LUMEN	LPW	QTY ON PALLET
LPA-G2-1-BACKLIT (1X4)	20	120-277V	2200	110	120 pcs
	25		2750	110	
	30		3300	110	
	35		3850	110	
	40		4400	110	
LPA-G2-2-BACKLIT (2X2)	20	120-277V	2500	125	144 pcs
	25		3125	125	
	30		3750	125	
	35		4375	125	
	40		5000	125	
LPA-G2-4-BACKLIT (2X4)	25	120-277V	3125	125	72 pcs
	30		3750	125	
	35		4375	125	
	40		5000	125	
	50		6250	125	

### DLC CODE

Part Number	DLC Product ID	DLC Class
LPA-G2-1-BACKLIT (1x4)	S-EKCAUX	Standard
LPA-G2-2-BACKLIT (2x2)	S-JQ6VLX	Standard
LPA-G2-4-BACKLIT (2x4)	S-V8JOA2	Standard


## LPA SERIES G2 SELECTABLE BACKLIT PANEL

## SENSOR SPEC

Model	Type	Mounting	Coverage	Input	Function	Programmable
CONTROL-LVFA (see page 6 for detail)	-	-	-	12V DC	Bluetooth Mesh On/Off/Dimming Scheduling	AVI-ON Bluetooth Mobile App
CONTROL-BLE-620 (see page 7 for detail)	Fixture Controller	Integral to Fixture	-	12V DC	CCT Tuning Dimming Grouping Time Schedule	ALS Control Bluetooth Mobile App
SENSOR-BLE-7 (see page 8 for detail)	Microwave	up to 13FT	17FT radius	12V DC	Bluetooth Mesh On/Off/Dimming Motion Daylight Sensing	ALS Control Bluetooth Mobile App
SENSOR-ANT-7 (see page 9 for detail)	Microwave	up to 12FT	17FT radius	10V DC	On/Off/Dimming Motion Daylight Sensing	REMOTE-RC100

# EMB SPEC

Model	Battery Capacity	Input	Output	Output Power	Operating Temp	Installation
EMB-H08170	90mins	100-347VAC	170VDC	8W	0°C ~ 50°C 32°F ~ 122°F	Factory or Field Install
EMB-H18170	90mins	100-347VAC	170VDC	18W	0°C ~ 50°C 32°F ~ 122°F	Factory or Field Install

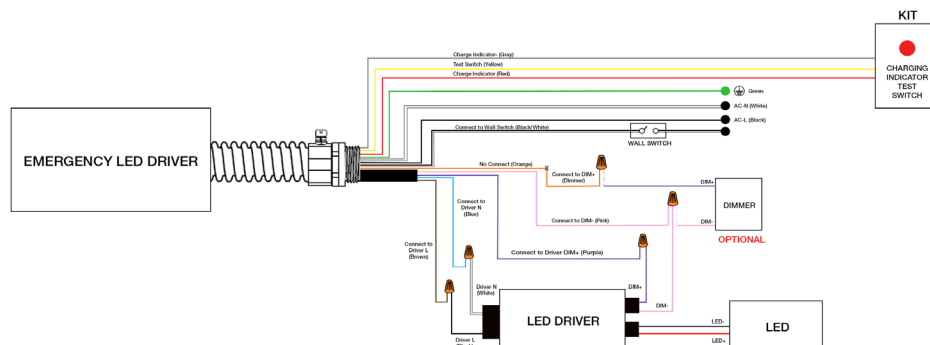

## LPA SERIES G2 SELECTABLE BACKLIT PANEL

### CONTROL-LVFA SPEC

#### Status LEDs & Config Button

Quick and easy validation of wiring and network

#### Direct Connect™ Sensor Port

Simple and cost-effective addition to Avi-on sensors

#### Terminal Blocks & Mounting Tabs

Faster, easier and lower cost installation eliminating connectors



#### Internal Antenna

Improved performance and eliminates risk of accidentally cutting a hanging wire


### SPECIFICATIONS

**INPUT VOLTAGE:** 12-24VDC  
**CURRENT:** 15mA without a Sensor  
 19mA with a DC PIR Sensor  
 48mA with a DC Microwave Sensor  
**0-10V DIMMING:** 12-24VDC  
**SIZE:** 2.30in x 1.43in x 0.75in  
 (58.2mm x 36.4mm x 19mm)  
**MOUNTING:** Removable mounting tabs  
**WEIGHT:** 0.45 oz (16g)  
**OPERATING TEMP:** -22°F to +158°F (-30°C to + 70°C)


**RADIO FREQUENCY:** 2.4GHz  
**WIRELESS STANDARD:** BLE 4.2 with Mesh  
**POINT TO POINT RANGE\*:** 80ft with obstructions  
 350ft unobstructed  
**SECURITY:** AES 128-bit encryption for device to device communication  
 AES 256-bit encryption for device to cloud communication  
**WARRANTY:** 5 years; 10 years optional  
**REGULATORY:** FCC: 2AFZI-AVI1010 B  
 IC: 20544-AVI1010 B  
 BQB: D031801, DID: 86303  
 UL 916, 2043 (Plenum Rated)

\*When communicating through the mesh, range is essentially unlimited (5000ft+)

### WIRING DIAGRAM

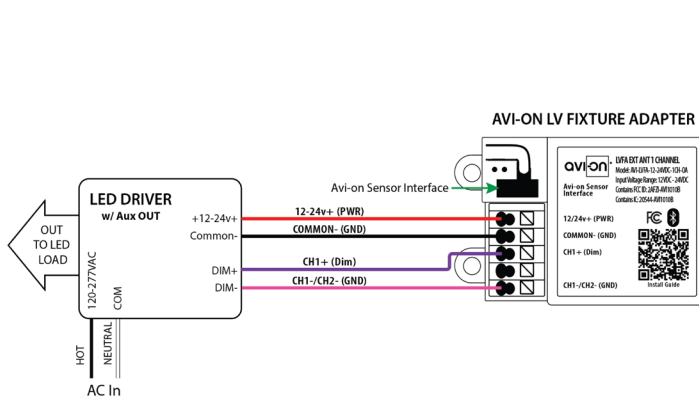

Fixture adapter powered by LED driver auxiliary output

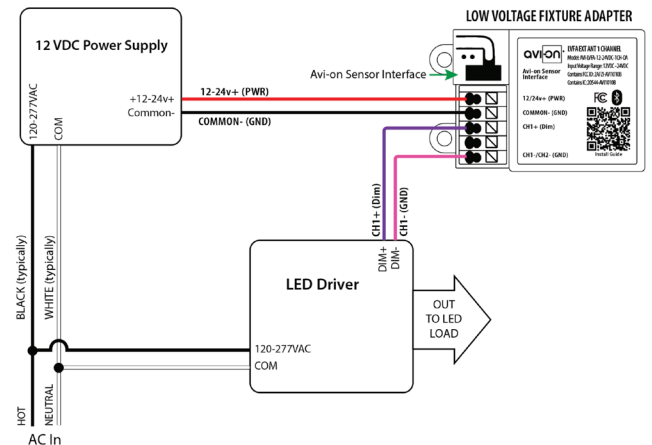

Fixture adapter connected to LED driver and using power supply

## FEATURE


- **Installation:** Factory installed, 12V AUX power required
- **Commissioning:** Wirelessly through ALS Control Mobile App (iOS / Android)
- **Certification:** DLC 5.1 Networked Lighting Control System
- **Control:** Dimming, High-End Trim, Zoning, Continuous Bi-level Dimming
- **CCT Tuning:** CCT Tuning feature for Dual/Multi-CCT LED board fixture only
- **Sensor:** Plug-N-Play with ALS Control sensors
- **Zone Control:** Zoning and Grouping control, Scheduling



## SPECIFICATIONS

<b>WIRELESS STANDARDS:</b>	5.0 Bluetooth Mesh
<b>INPUT VOLTAGE:</b>	12-14VDC, >50mA
<b>OUTPUT VOLTAGE:</b>	LED Max. 150VDC Max. 2A
<b>CONTROL OUTPUT:</b>	0-10V
<b>OPERATING TEMP:</b>	-40°F ~ +158°F (-40°C ~ +70°C)
<b>COMMISSIONING RANGE:</b>	50FT
<b>BLUETOOTH RANGE:</b>	100FT
<b>WARRANTY:</b>	5 years
<b>IP RATING:</b>	IP20

## DIMENSIONS

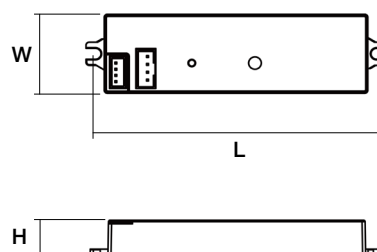


<b>L</b>	<b>H</b>	<b>W</b>
3.5" (89mm)	0.43" (11mm)	1.00" (26mm)

<b>Lead Wire</b>	<b>Antenna Wire</b>
10.60" (270mm)	10.60" (270mm)

## WIRING DIAGRAM

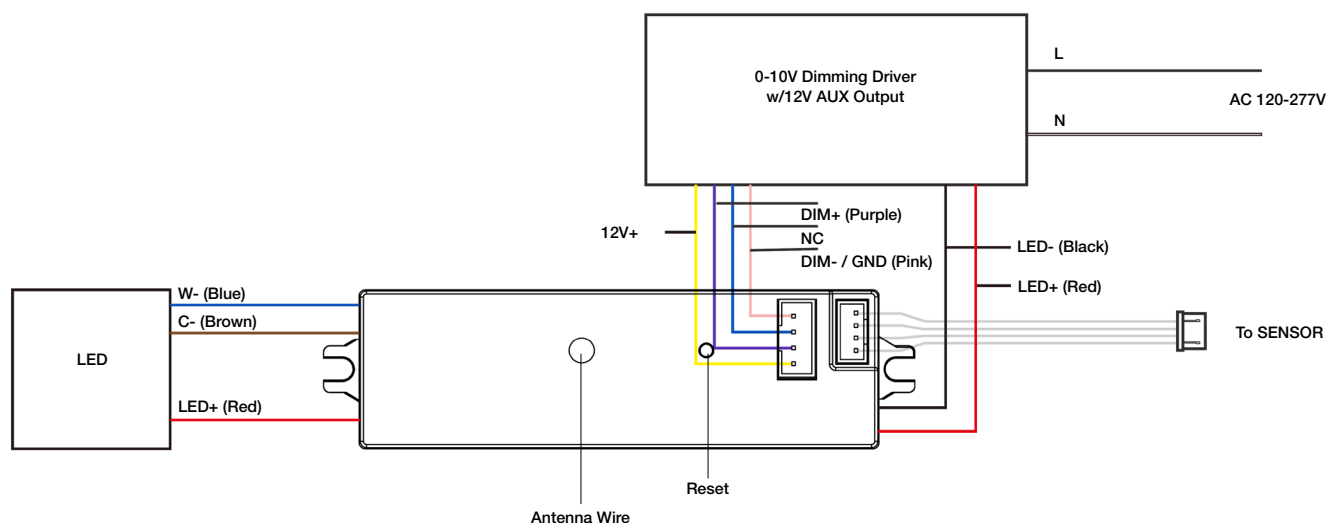

### FEATURE

- **Installation:** Factory Install - Integral to Fixture
- **Commissioning:** Wirelessly through ALS Control Mobile App (iOS / Android)
- **Certification:** DLC 5.1 Networked Lighting Control System
- **Control:** Hold time, High-Low setting, continuous Bi-level dimming, Code-compliant manual-on or auto-off capability
- **Sensor:** Motion (Occupancy/Vacancy/Manual)
- **Room and Zone Control:** Zoning and Grouping control, Scheduling



### SPECIFICATIONS

<b>SENSOR TYPE:</b>	Microwave
<b>WIRELESS STANDARDS:</b>	Bluetooth SIG Mesh
<b>INPUT VOLTAGE:</b>	10-14VDC, >50mA
<b>CONTROL OUTPUT:</b>	0-10V
<b>OPERATING TEMP:</b>	-40°F ~ +158°F (-40°C ~ +70°C)


<b>COMMISSIONING RANGE:</b>	50FT
<b>BLUETOOTH RANGE:</b>	Integral antenna up to 164FT
<b>DETECTION ANGLE:</b>	360°
<b>MOUNTING HEIGHT:</b>	Up to 13FT
<b>WARRANTY:</b>	5 years
<b>IP RATING:</b>	IP20

### DIMENSIONS




L	W
3.70" (94mm)	0.73" (18.5mm)


### COVERAGE PATTERNS

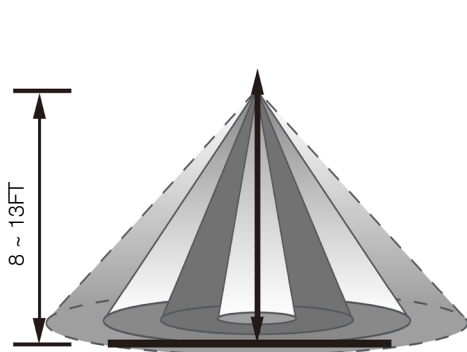

Height of Installation 8 ~ 13FT

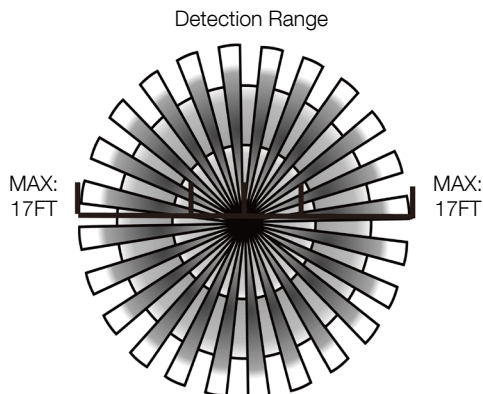


Height of Installation 8FT

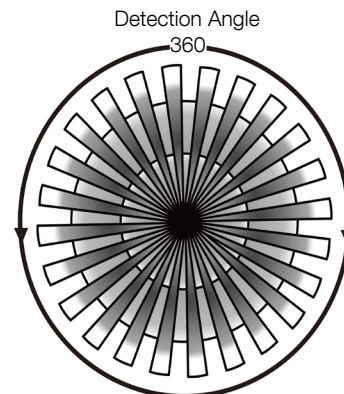



## FEATURE

- **Installation:** Factory Install - Integral to Fixture
- **Commissioning:** through Remote Control
- **Control:** Hold time, High-Low setting, Continuous Bi-Level Dimming, Code-Compliant Manual-On or Auto-Off Capability
- **Sensor:** Motion (Occupancy/Vacancy/Manual)

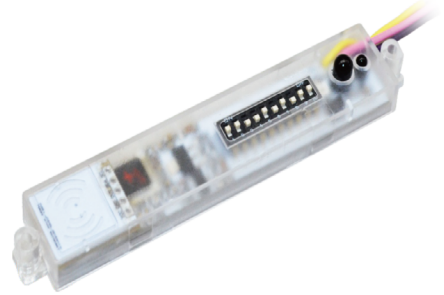


## SPECIFICATIONS

**SENSOR TYPE:** Microwave  
**INPUT VOLTAGE:** 12-24VDC, >50mA  
**LIGHT-CONTROL:** 10 ~ 50LUX  
**CONTROL OUTPUT:** 0-10V  
**OPERATING TEMP:** -40°F ~ +158°F (-40°C ~ +70°C)


**COMMISSIONING RANGE:** 50FT from Remote Control  
**TIME SETTING:** 10sec ~ 60min (adjustable)  
**DETECTION ANGLE:** 360°  
**MOUNTING HEIGHT:** Up to 12FT  
**WARRANTY:** 5 years  
**IP RATING:** IP20

## DIMENSIONS

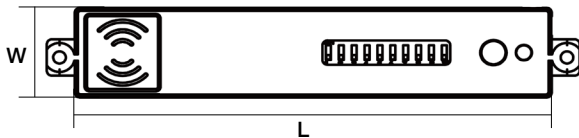

L	W
3.70" (94mm)	0.73" (18.5mm)

## COVERAGE PATTERNS

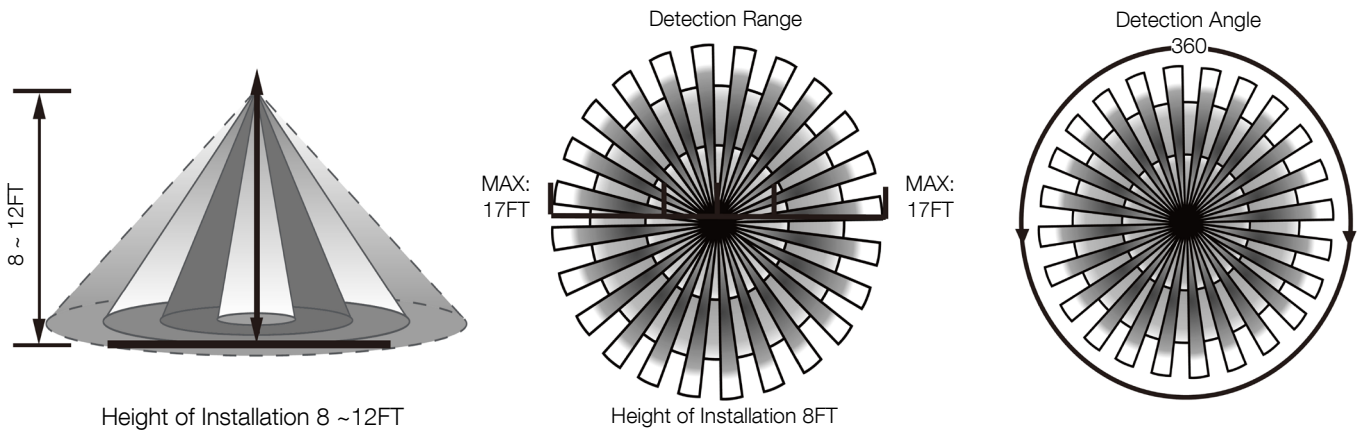


## GTD-ESRLUD Generator Transfer Device

Client:  
Project:  
Type:  
Quantity:

### CONSTRUCTION

Yellow metal casing. Integrates with dry contact systems to provide lighting during power outages. Features a slim enclosure, allowing for seamlessly integrating into existing building infrastructure.

Designed for commercial and industrial applications that require an emergency load to be switched on during a loss of normal power.

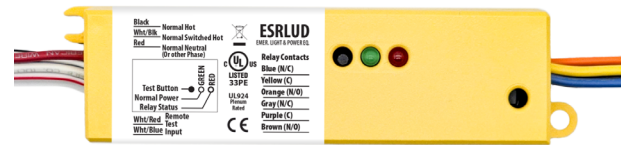

### SPECIFICATIONS

<b>COIL CURRENT:</b>	Normal Power = 6mA MAX
<b>COIL VOLTAGE INPUT:</b>	120-277V AC (50/60 Hz)
<b>EXPECTED RELAY LIFE:</b>	10 Million Cycles Min Mechanical
<b>RELAY CONTACT RATINGS:</b>	10 Amp Resistive @ 30 V DC 10 Amp General Use @ 277 V AC
<b>OPERATING TEMP:</b>	-30°F ~ +140°F (-34°C ~ +60°C)
<b>OPERATE TIME:</b>	18ms
<b>HUMIDITY RANGE:</b>	5-95% (Noncondensing)
<b>LED:</b>	Green = Normal Power Red = Relay Status
<b>DIMENSIONS:</b>	1.40"H x 5.63"W x 1.00"D
<b>WIRES:</b>	16", 600V Rated
<b>OVERRIDE (TEST SWITCH):</b>	No
<b>APPROVALS:</b>	UL924, C-UL, CE, ROHS
<b>NOTES:</b>	Device Draws no Current From Emergency Source

### TESTING

<b>INITIAL TEST FOR CORRECT WIRING:</b>	Apply Normal Power To Normal Power Input a. Green LED (Normal Power) should be ON b. Red LED (Relay Status) should be ON c. Load should be OFF d. Relay Contact (N/O) should be CLOSED
<b>LOCAL TEST BUTTON:</b>	1. Turn Switched Circuit OFF. Load be OFF. 2. Press and Hold "Local Test Button" 3. Load should Turn ON 4. Release "Local Test Button" and Emergency Light should Turn OFF.
<b>WALL SWITCH:</b>	1. Turn ON Wall Switch If not already ON 2. Load should Turn ON 3. Turn Wall Switch OFF 4. Load will Turn OFF

### TROUBLESHOOTING


CONDITION	ACTION
Green LED is OFF	<ul style="list-style-type: none"> <li>Check Normal Power Input Wiring (Black and Red Wires) and Voltage.</li> </ul>
Red LED is OFF but Load is OFF	<ul style="list-style-type: none"> <li>Check Bulbs and Ballast.</li> <li>Check Load Wiring (Blue Wire and Load's Neutral).</li> <li>Replace Unit. (Assuming N/C Contact is Used).</li> </ul>
Load is ON but Red LED is ON	<ul style="list-style-type: none"> <li>Replace Unit. (Assuming N/C Contact is Used).</li> </ul>
Red LED does not Turn OFF and Load does not Turn ON when being tested	<ul style="list-style-type: none"> <li>Check Bulbs and Ballast.</li> <li>Check Wiring Connections if Using a Remote Test Option.</li> <li>Press Local Test Button on the Unit.</li> <li>Replace Unit.</li> </ul>
Red LED will not Turn ON and Load will not Turn OFF	<ul style="list-style-type: none"> <li>Verify Status of Normal Power Input.</li> <li>Open Wall Switch Input.</li> <li>Verify That No Test Inputs are Stuck Closed.</li> </ul>



## GTD-ESRLUD Generator Transfer Device

### WIRING DIAGRAM

#### USING EMERGENCY LIGHTING AS NORMAL LIGHTING

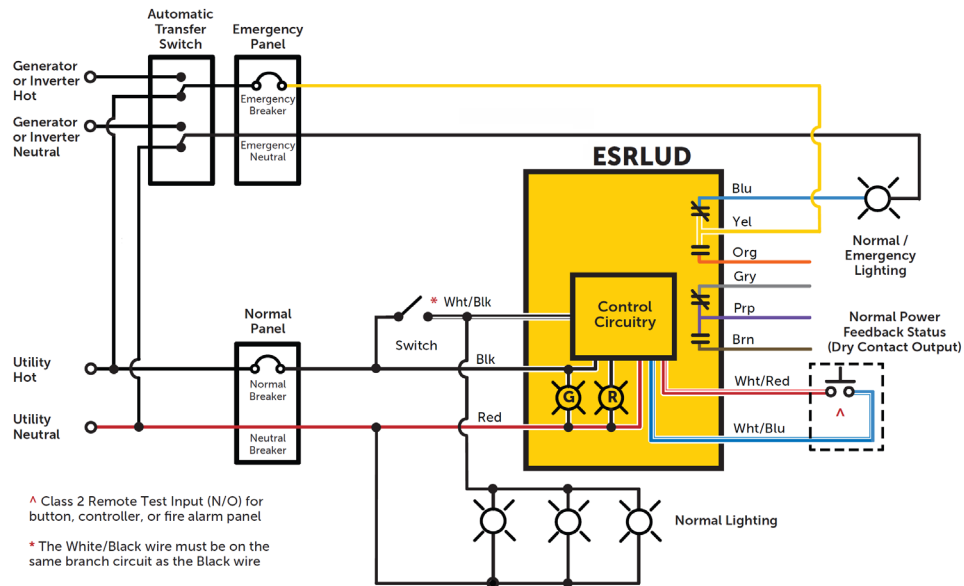

#### OVERRIDING A 0-10V DIMMER

