

PLEASE READ AND FOLLOW ALL SAFETY INSTRUCTIONS

SAVE THIS SHEET

To Avoid Risk of Electric Shock and Injury

- Never attempt any work on the luminaire unless it is disconnected from the power source.
- Any Installation and service of the luminaire should be done by a certified electrician.
- Confirm the supply voltage matches the voltage labeled on the luminaire.
- Make sure all electrical and grounded connections are in accordance with the National Electric Code (NEC) and any local codes.
- Make sure all connections are capped with UL-listed wire connectors.
- Allow luminaire to cool down before handling. Never handle luminaire when it is in use.
- Do not exceed the maximum wattage labeled on luminaire.
- Always wear gloves and safety glasses when installing, handling, or performing routine maintenance on the luminaire.
- Do not look directly at the light source when luminaire is on.

To Avoid Risk of Fire and Product Damage

- Keep any combustible material away from the luminaire.
- Do not operate luminaire near any persons, materials, or substances that are sensitive to heat.
- When mounting, make sure wiring is secured from any edges or objects that can damage the wire insulation.
- Do not obstruct ventilation of the luminaire. Do not cover the luminaire with foam or other insulation material that will restrict convection or conduction cooling.
- Only use luminaire at its intended location.
- LED fixtures are sensitive to polarity. Make sure to identify proper polarity before installing.
- Electrostatic Discharge (or ESD) can damage LED luminaire. Make sure to always wear personal grounding equipment when installing or servicing the luminaire.
- Avoid touching individual electrical components, which can cause ESD and will reduce the life and performance of the luminaire.
- Do not power luminaire on and off frequently as this will greatly reduce luminaire's lifespan.
- Always read the luminaire's complete installation instruction sheet before installing luminaire.
- Always inspect the luminaire for damage. DO NOT INSTALL fixture if there is any damage. Contact your distributor or representative where you purchased the luminaire for warranty claim if luminaire is damaged.

To Maintain Luminaire and Ensure Consistent Performance

- **IMPORTANT: Always make sure luminaire is disconnected from power source when performing routine maintenance.**
- Occasionally clean luminaire lens. When cleaning lens, you may dust with soft, dry and clean cloth. You may also use solution of warm water and non-abrasive cleaning agent then wipe with dry cloth. DO NOT USE alkaline or acid cleaners.
- Keep heatsink clear of dust or debris from time to time.
- Maintaining the luminaire on a routine basis is highly recommended.

Failure to follow any of these instructions may void warranty.

Please visit www.alslighting.us to view complete product Terms and Conditions.

Advantage Lighting Solutions assumes no responsibility for claims arising from improper or careless installation or handling of its products.


Important Safety Instructions

1. Make sure power is turned OFF before installing.
2. Inspect fixture for any damages. If damaged, DO NOT install fixture and contact local ALS distributor immediately.


Installation Instructions

Surface Mount


Step 1: Unscrew the screw on the top surface of the fixture as shown in the figure. Then unscrew the 3/4" NPS Hole Plug from the top surface of the fixture.

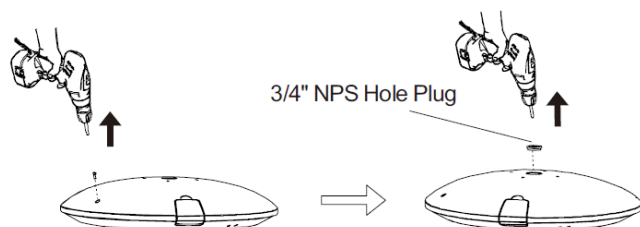


Step 2: Release the two clips on the top of the fixture, then lift the top cover of the fixture upward. **(The opening position of the top cover aligns with the light emission direction.)**

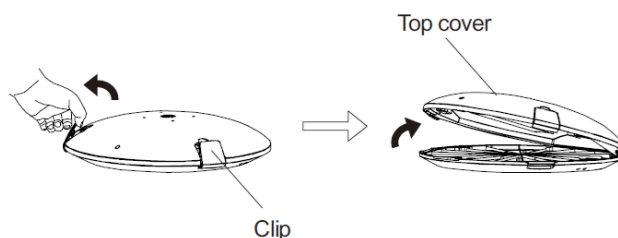


Step 3: As shown in the diagram, use an electric drill to drill out the metal sheet at the Cable outlet.

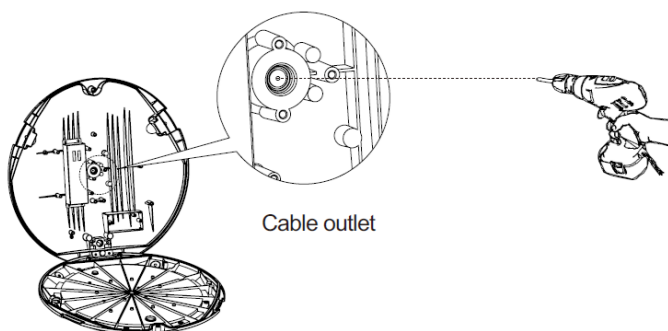


Step 4: Slide the Cable Gland and Silicone Plug over the fixture's power cable, thread the cable through the cable outlet as shown in the figure, and finally secure the Cable Gland to the outlet with two screws.

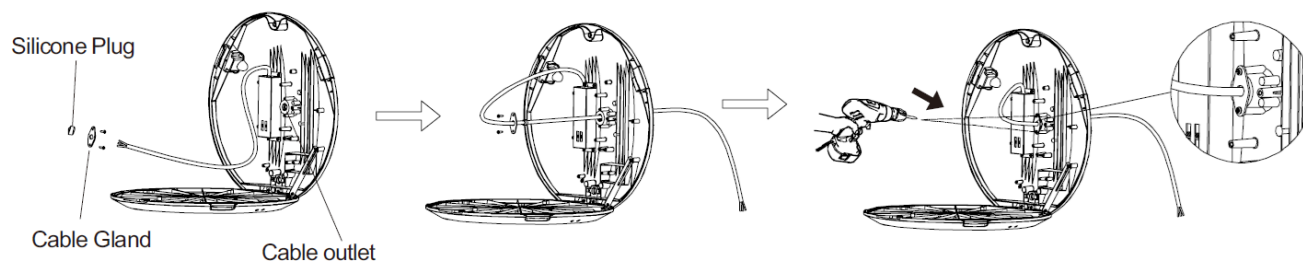


Step 5: Close the top cover of the fixture, fasten the clips on the top surface of the fixture, and tighten the screw on the top surface of the fixture as shown in the figure.

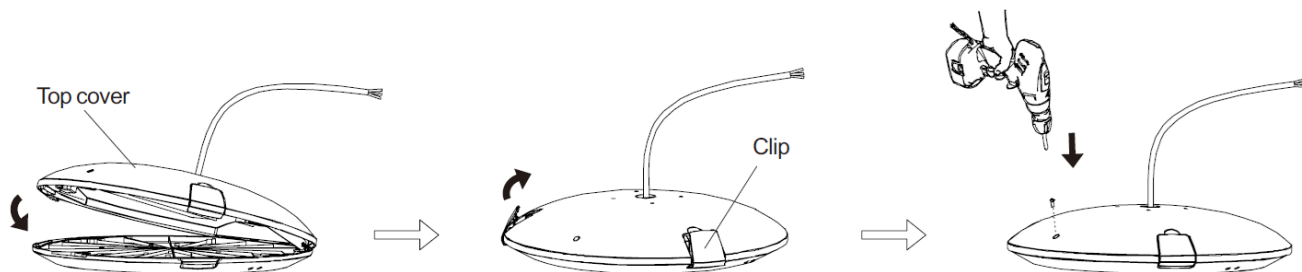


Step 6: Pull the fixture's input cable through the Surface Mount, then tighten the four screws to secure the Surface Mount to the top surface of the fixture.

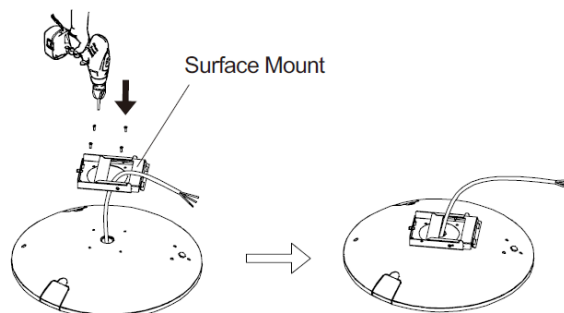


Step 7: Adjust the backplate of the Surface Mount to the correct position according to the fixture's desired lighting direction, then mount it on the ceiling.

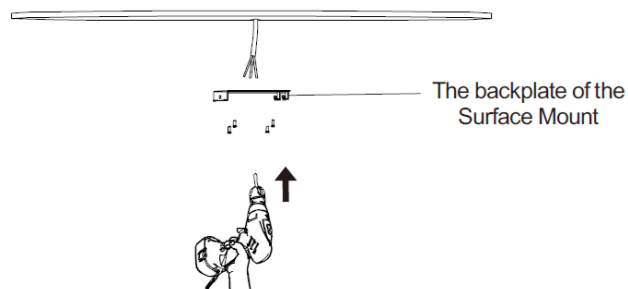

Step 8: Hang the fixture onto the hook on the backplate of the Surface Mount. Then connect the fixture's power cable to the input cable.

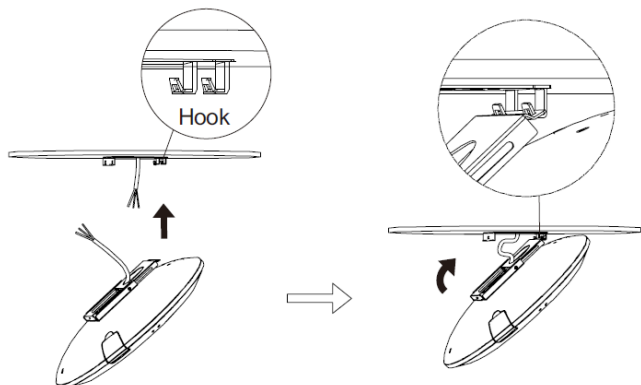


Step 9: Push the fixture upward until the Surface Mount on the fixture catches the U-protrusion of the Surface Mount's backplate, then tighten the screw as shown in the figure. The installation is then complete.

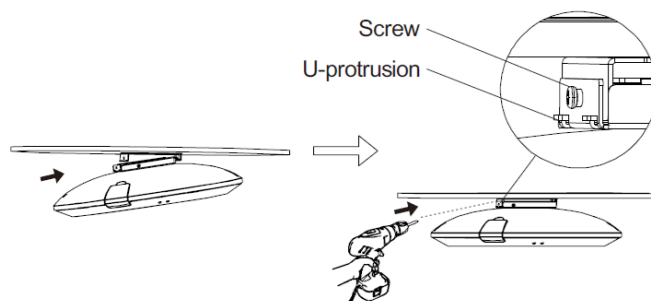


Installation Instructions

Pendant Mount



Step 6: Connect the fixture's power cable to the input cable.

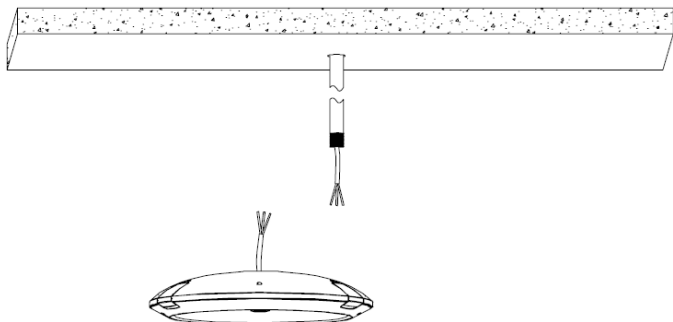


Step 7: Screw the fixture into the 3/4" NPS Conduit. The installation is then complete.

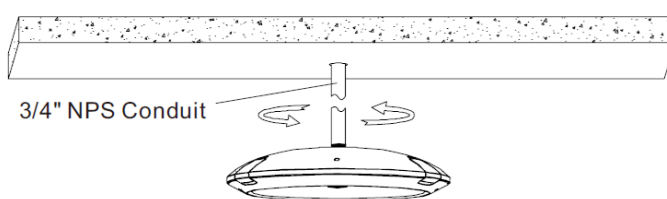

Wattage & CCT Selectable

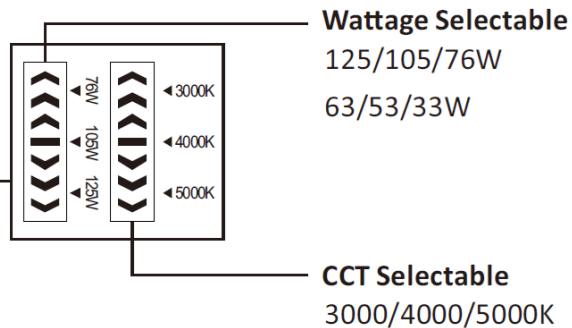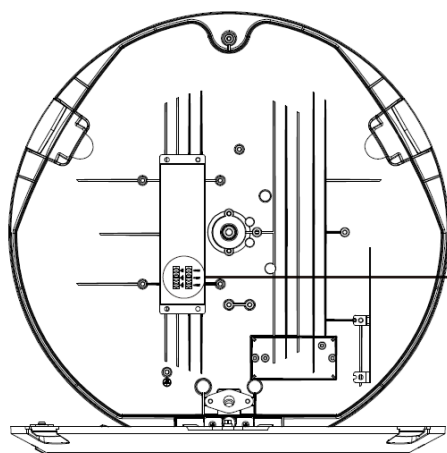

Wiring Diagram

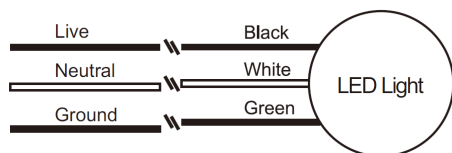

120-277/347VAC 50/60Hz
200-480VAC 50/60Hz